

# CHANDELIER LIGHT(CHAIN)

## Assembly Instructions



### CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

### TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver



Pliers



Wire strippers

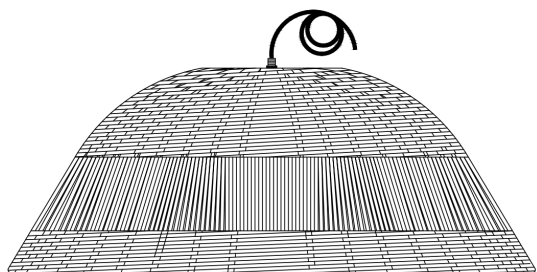


Fixture



Fixture Loop



Quick Connect Chain Link




Chain



Mounting Unit



Mounting Screws



Canopy



Screw Collar Ring



Wire Nuts

\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


# CHANDELIER LIGHT(CHAIN)

## Assembly Instructions

### STEP 1


Thread the **Fixture Loop** onto the nipple of the **Fixture**.

Attach the end of the **Chain** to the **Fixture Loop** with the **Quick Connect Chain Link**.

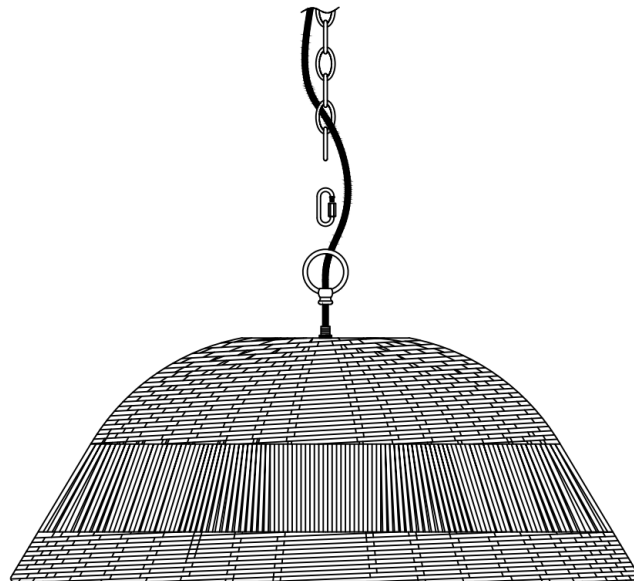


### STEP 2

Use the **mounting screws** to attach the **mounting unit** to the junction box

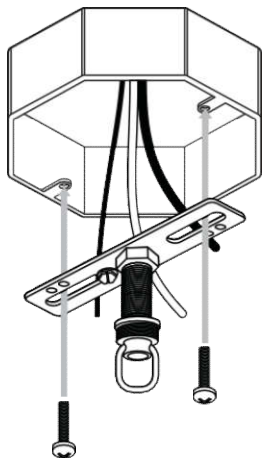

### STEP 3

Pass the **chain** and the branchwires through the **screw collar ring** and **canopy**. Feed the branchwires through the pipe nipple on the **mounting unit** and attach the end of the **chain** to the **mounting unit** with the **Quick Connect Chain Link**.

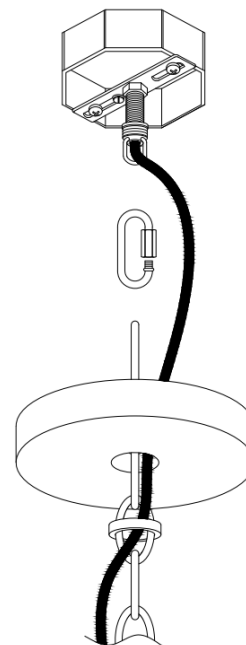

# CHANDELIER LIGHT(CHAIN)

## Assembly Instructions

### STEP 4



Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.


Connect Clear, Brown, Gold or Black \*Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

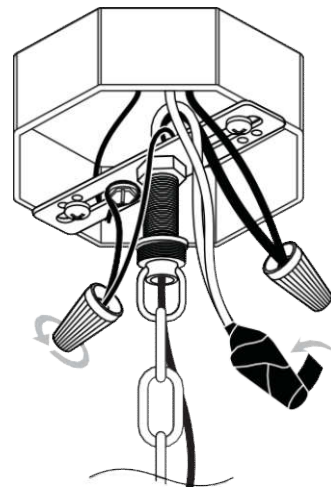

### STEP 5

Secure the **canopy** to the **mounting unit** with the **screw collar ring**.

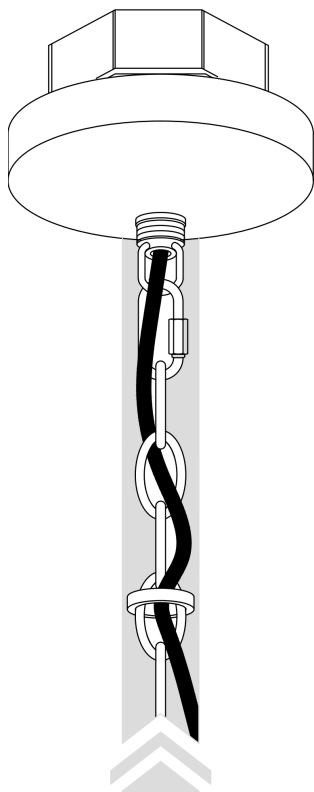

### STEP 6

Install bulb type E26 60W (not included)

