

## Instruction Manual

### CRYSTAL FLUSHMOUNT

#### Questions?

E-mail our customer service department

#### IMPORTANT SAFETY INSTRUCTIONS:

This fixture must be installed by a qualified electrician!  
Disconnect the power at the main electrical panel before installation.

This fixture is for indoor use only. The fixture should not be used near water. Never cover the lamp with any object, including cloth or paper as this is a fire hazard. Do not handle the bulb immediately after the light is turned off as it will be hot. This is not a toy. It is recommended that you wear gloves during assembly.

#### ASSEMBLY INSTRUCTIONS:

1. TURN THE MAIN POWER SUPPLY OFF
2. ATTACH THE MOUNTING PLATE TO THE ELECTRICAL BOX WITH THE 2 SHORT SCREWS
3. MAKE THE WIRE CONNECTIONS. CONNECT BLACK TO BLACK WIRE AND WHITE TO WHITE WIRE. ATTACH GROUNDING WIRE TO MOUNTING PLATE .
4. ALIGN THE HOLES IN CANOPY WITH THE 2 LONG SCREWS IN THE MOUNTING PLATE, AND SECURE THE CANOPY ONTO THE MOUNTING PLATE WITH THE 2 BOLTS
5. UNSCREW THE FINIAL FROM THE ROD AND SCREW THE ROD INTO THE CANOPY.
6. PLACE THE FINIAL PLATE ONTO THE ROD AND SECURE WITH THE FINIAL
7. INSTALL THE BULBS OF PROPER SIZE AND WATTAGE.
8. ATTACH THE CRYSTAL STRINGS FROM THE CANOPY TO THE FINIAL PLATE (SEE EXAMPLE A) BY SPREADING THE SMALL METAL RINGS AND THREADING THEM THROUGH THE HOLES ON THE FINIAL PLATE
9. ASSEMBLY IS COMPLETE.

#### CLEANING & MAINTENANCE:

##### BULB REPLACEMENT:


Turn off the power to the flushmount before replacing bulb.  
Remove crystal strings by separating the metal ring and removing the strings from the finial plate. Replace the bulb/s. Re-attach the crystal string using step 8 above.

##### TROUBLESHOOTING:

1. If lamp does not light, check the bulb for a broken filament. Replace bulb if necessary.
2. If the external flexible cable or cord of this fixture is damaged, it must be replaced by a qualified electrician in order to avoid a hazard.

##### MAINTENANCE:

1. To clean, use a soft cloth only.
2. Do not use any chemical or abrasive cleaners.

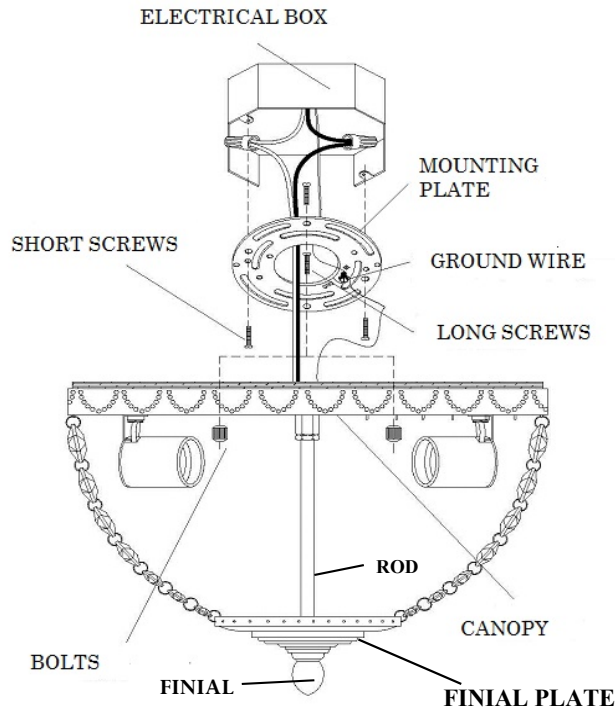

EXAMPLE A

REQUIRES:  
2- 40W MAX MEDIUM BASE  
TYPE B BULBS (NOT INCLUDED)

## LIMITED WARRANTY

---