

24" C-SERIES BEER DISPENSER

HC24TB-3-*** 24" INDOOR MODEL

HC24TO-3-*** 24" OUTDOOR MODEL



Single Faucet Indoor



Two Faucet Indoor



630SS Forward Sealing
Beer Faucet


GENERAL C-SERIES FEATURES




- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Commercial-grade stainless steel interior. Indoor models have black vinyl clad exterior; outdoor models have stainless steel exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- Interior light and digital control
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

HC24TB/TO FEATURES

- Available with stainless steel solid door or panel ready solid door
- Industry Exclusive Perlick patented stainless steel 630SS Forward Sealing Beer Faucet
- Air-cooled tower keeps beer cold from keg to tap
- Stores (1) 1/4 barrel or (2) 1/6 barrels
- Complete, self-contained beer system
- Portable drainer; no plumbing required
- 1- or 2- faucet tapping kit
- Low profile coupler for "D" system keg values and 630SS standard beer faucet included
- Beer Dispenser temperature 33° - 42°F



One 1/4 barrel
(standard or slim)




Two 1/6 barrel

PRODUCT SPECIFICATIONS

Product Width	23-7/8" (606 mm.)
Product Height	34-1/4" (870 mm.)
Product Depth	24" (610 mm.)
Opening Width	24" (610 mm.)
Opening Height	34-1/2" (876 mm.)
Opening Depth**	24-7/8" (632 mm.)
Refrigerated Volume	5.2 cu. ft.
Door Swing Clearance	25" (635 mm.) minimum
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	525 BTU, standard
Plumbing	None Required
Annual Energy Usage	305 kWh
Shipping Weight	222 lbs (100.7 kg.)

** Includes 7/8" plug clearance. To achieve 24" depth, you must recess the plug into the wall directly behind the unit.

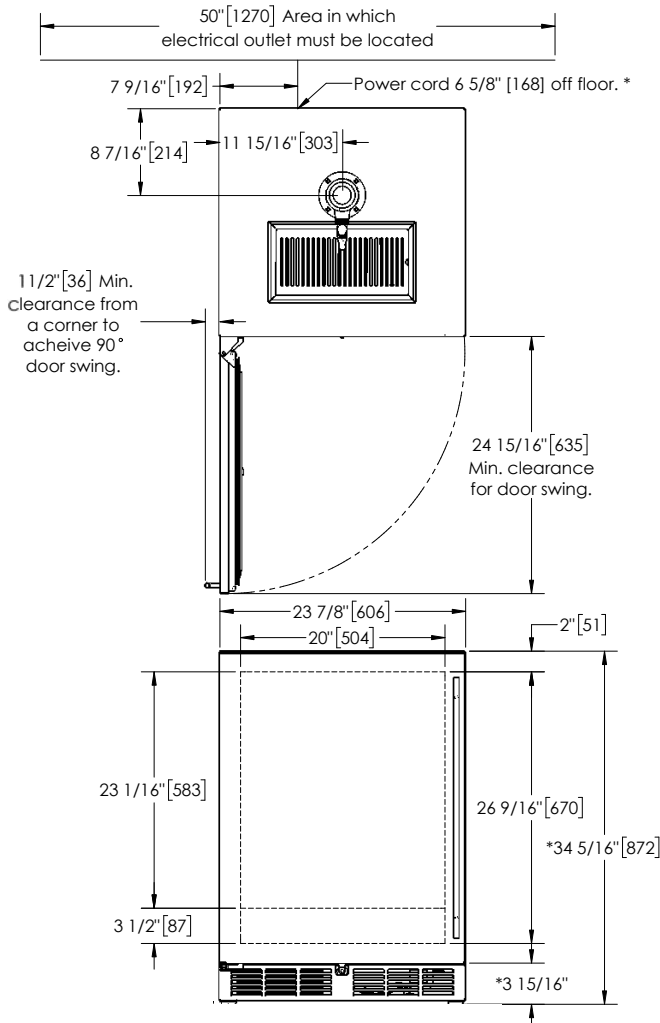

INDOOR MODELS

HC24TB-3-1L#*	Stainless steel solid door, hinge left
HC24TB-3-2L#*†	Panel ready solid door, hinge left

OUTDOOR MODELS

HC24TO-3-1L#*	Stainless steel solid door, hinge left
HC24TO-3-2L#*†	Panel ready solid door, hinge left

* Also available hinge right (R)

Add 1 for single faucet, 2 for two faucet


† This unit comes ready to accept customer-provided overlay panel and handle

OPTIONAL ACCESSORIES

(L)	Factory Installed Lock
66736	Caster Kit for HP24/HC24/HA24 models
63797	Beer Dispenser Cleaning Kit
40030S	Keg Coupler, Lo-Boy "S" Series
308-40C	Faucet Lock for C-Series 630SS Beer Faucets
BLC4/32	Beer Dispenser Sanitizer (4oz. or 32 oz.)

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com/residential

* - Leg leveler can add 3/4" [19] to these dimensions when fully extended.

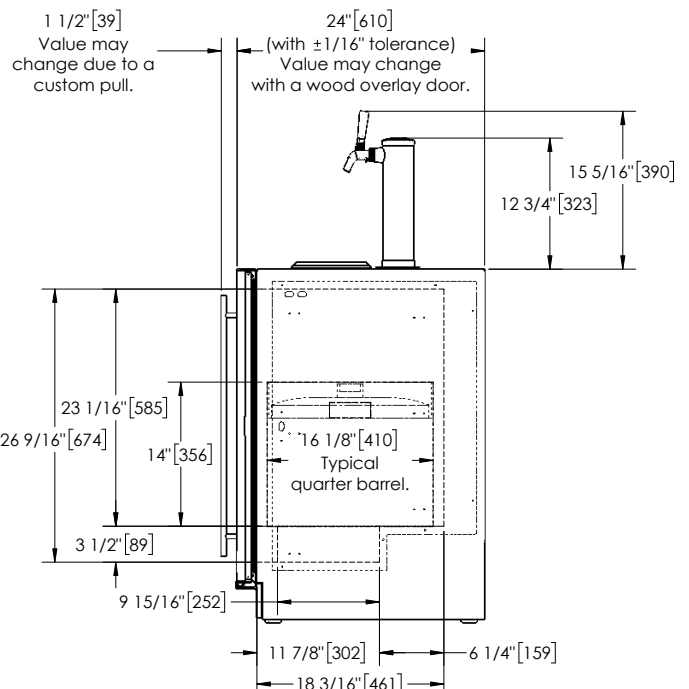

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

FORM NO. Z2526
REV. A-09/07/2018