


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

1-LIGHT CEILING LAMP

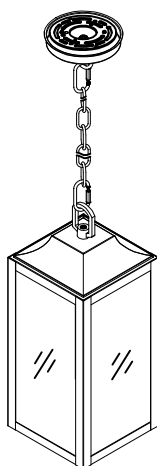


TOOLS REQUIRED




Flathead
Screwdriver



Phillips
Screwdriver



Ladder



Wire Strippers



Pliers



Electrical
Tape



Wire Cutters



Safety Glasses

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.

PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY
A	Wire nut	3
B	Mounting plate	1
C	Green ground screw	1
D	Outlet box screw	2
E	Canopy	1
F	Decorative Nuts	2
G	Open Lock Ring	2
H	Chain Sling	1
I	Fixture body	1

INSTALLATION

1. Fix the mounting plate (B) onto the junction box with the outlet box screws (D).
2. Install two maximum 40W B-type light bulbs (not included) onto the lamp holder.
3. Use two open Lock ring (G) to connect the Fixture body (I), Chain Sling (H), and Suction Disk (E) together.
4. Connect the grounding wire (green or bare copper wire) of the power supply circuit to the fixed grounding wire, with the black wire connected to (black) and the white wire connected to (white).
5. Insert the canopy (E) into the mounting plate (B) and lock it with the two decorative nuts (F).

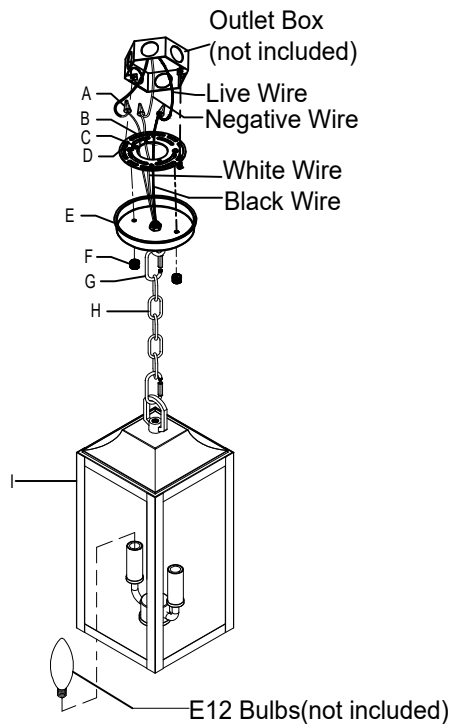

If you have any issues with use this product, please email us. Be sure to include your order number and photos of the issues. This will help us provide you with faster support and solve your problem.