




Ivy Rain Barrel® Installation Instructions

Please read *all* instructions before installing your rain barrel and retain instructions for future reference. You can also watch our instal video! Scan the QR code to watch on YouTube.


The Ivy Rain Barrel® is proudly made in the USA of the highest quality materials available.

Installation Video:



What's included:

- rain barrel (A)
- rain barrel lid (B)
- pre installed screen & ring (C)
- overflow cap (D)
- ball valve - spigot (E)
- re-usable zip ties (F)
- flex overflow hose (G)
- rubber washer (H)

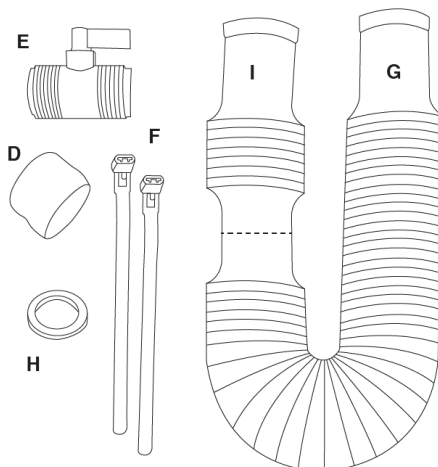


What's needed for installation:

- gloves and safety glasses
- blocks (K)*
- hack saw
- tape measure and marker
- screw driver
- downspout elbow (J)*

* not included

Step 1: Assemble the barrel.

- Insert the rubber washer (H) into threaded port at the bottom of the barrel. Thread the ball valve (E) using end with tighter thread pattern into same port. The small lever points away from the barrel when properly installed. Hand tighten, **DO NOT** over tighten with wrench or use teflon tape, this may damage seal.
- Attach lid (B) and secure with re-leasable zip ties (F).
- Connect overflow hose (G) to one overflow port. This will friction fit and does not require any additional fasteners. Pull gently on the overflow hose to expand and direct it away from your home's foundation. Add the overflow cap (D) to opposite port.

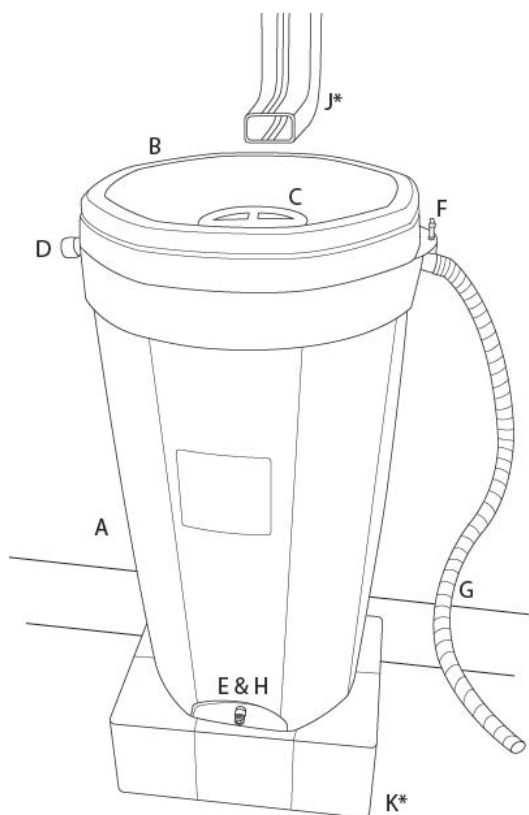

Step 2: Choose a convenient downspout location. It is recommended to elevate rain barrel using solid blocks and install on *sturdy, level* ground. **Block base must be larger than the bottom of the barrel.**

Step 3: Measure blocks and assembled rain barrel, allow room for gutter elbow (J)* and mark the cut. **WARNING:** Cold climates be aware that heated downspouts may cause electrical shock. Call a professional before installing. Wearing safety glasses and gloves use a hack saw to cut downspout.

Final Step: Place assembled rain barrel on blocks (K)* and attach gutter elbow to direct rainwater into screened inlet of lid. You are now ready to start collecting and using your rainwater! This water is **NONPOTABLE** and should never be consumed.

* not included

For more options on how set up and use your rain barrel, watch our YouTube series at youtube.com/@RainWaterSolutionsTV



Daisy chaining multiple rain barrels: Link two or more barrels so the over flow will drain into the additional barrel(s).

Follow steps 1 and 2 to assemble the additional barrel and create a base close to the first barrel.


The overflow hose has a small indented section (I) that can be cut using scissors or utility knife and used to link multiple rain barrels by attaching overflow section between 2 overflow ports. Link the second barrel to the first barrel.

Attach the second over flow hose to the second barrel and direct away from the home's foundation. You should have an extra over flow cap and length of over flow hose left over from this set up.


Maintenance: Keep screened inlet clear of debris. In areas that have large pollen counts, the rain barrel may develop a smell after pollen season. If this happens, drain barrel and use soft bristle brush to clean out barrel then re-install. Once a year completely drain the barrel and remove any accumulated organic matter. Screen ring (C) pops out to clean or replace screen.

Winterize: Winterize your barrel if temperatures get bellow freezing in your area. Drain, disconnect and store in a dry area.

Warning:

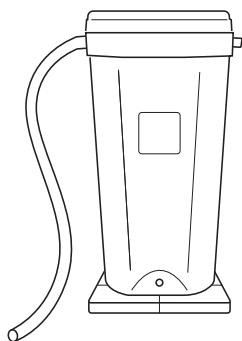

To prevent the barrel from tipping over
Make sure your block base is wider
than the bottom of the rain barrel.

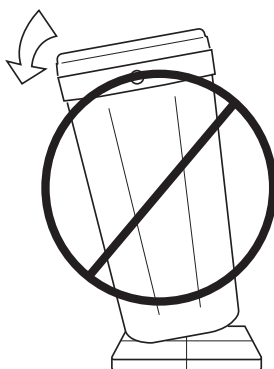


Do not tip the barrel to get the
water out. This can stress the
base and cause leaking.



Water from your rain barrel is
NONPOTABLE and should
never be consumed.

Warranty Registration:



Warranty: The Ivy Rain Barrel® is warranted for two years from date of retail purchase against defects in material and workmanship, and is solely for the benefit of the original consumer purchaser. (Retain your dated sales receipt as proof of purchase).

COVERED: Replacement of defective parts and freight (Standard Ground) to cover product return and delivery.

NOT COVERED: Damages caused by negligence, abuse, failure to perform normal maintenance, failure to properly winterize or failure to adhere to product instructions for use. Any other expense involving this product. This Warranty shall not apply to any defect, malfunction or failure to conform with the Warranty provisions if caused by damage (not resulting from defect or malfunction) due to unreasonable use or accidental occurrence involving the Purchaser. This includes **CONSEQUENTIAL DAMAGES, INCIDENTAL DAMAGES OR INCIDENTAL EXPENSES, INCLUDING DAMAGE TO PROPERTY AND INJURY TO PERSONS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.**

This Warranty gives you specific legal rights, which may vary from state to state.

Request For Warranty:

Please email info@rainwatersolutions.com and include proof of purchase, description of issue, and photo of the issue.