


DuraStyle Toilet wall-mounted Duravit Rimless® ♿ #
254209..92 / 254209..92

| < 14 5/8" X 24 3/8" Inch > |

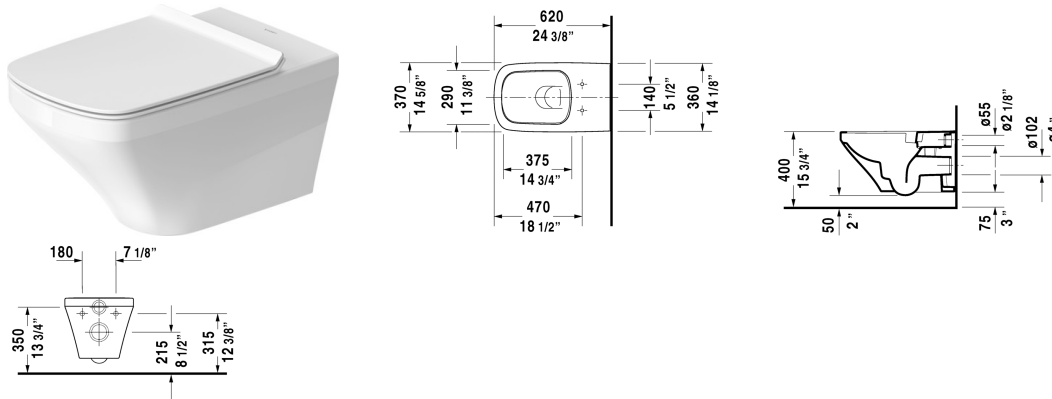

| Toilet wall-mounted Duravit Rimless® | Dimension | Weight | Order number |
|--|------------------------|---------|--------------|
| rimless, washdown model, Durafix included, cUPC® listed*, WaterSense® listed | | | |
| Colors | | | |
| 00 White 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness) | | | |
| Variant | | | |
| ♣ 1.6/0.8 gpf | 14 5/8" X 24 3/8" Inch | 62.4 lb | 254209..92 |
| ♣ 1.6/0.8 gpf | 14 5/8" X 24 3/8" Inch | 62.4 lb | 254209..92 |
| Infobox | | | |
| * Complies with following standards: ASME A112.19.2/CSA B45.1 and ASME A112.19.14, Durafix for concealed installation is included, Wall-mounted toilet is ADA compliant, when installed with a seat height of 17" - 19" from the finished floor, In-wall tank & carrier and actuator plate required for installation | | | |
| Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number. | | | |
| Noise reduction gasket for wall-mounted toilet | | 0.7 lb | 005064 |
| Actuator plate A1, for toilet, plastic mechanical actuation, for surface mounted installation, dual flush, mounting frame, mounting hardware included, push rods, front plate plastic | 8 1/2" x 5 3/4" Inch | 0.7 lb | WD5008 |

DuraStyle Toilet wall-mounted Duravit Rimless® ♿ #
254209..92 / 254209..92

|< 14 5/8" X 24 3/8" Inch >|

| | | |
|--|---------------------------------------|---------------|
| <p>Toilet in-wall tank & carrier, Standard WaterSense® listed, For 2"x4" and 2"x6" wall installation, for toilets with a projection of <= 24 5/8", adjustable feet 0" - 9 1/2", SensoWash ready, mechanical front flush actuation, includes in-wall tank, marking of filling height, dual flush, insulated against condensation, Scope of delivery, HDPE wall-mounted toilet connection bend DN 90/90, PE wall-mounted toilet connection set DN 90, wall-mounted mounting rods M12, mounting hardware included, 2 bolt caps, cUPC® listed*, Load capacity = 880 lbs</p> | <p>23 1/4" x 45 1/4" Inch 35.3 lb</p> | <p>WD1022</p> |
| <p>Suitable products</p> | | |
| <p>Toilet seat and cover removable, elongated, hinges stainless steel, without slow close,</p> | | <p>006051</p> |
| <p>Toilet seat and cover removable, elongated, hinges stainless steel, with slow close,</p> | | <p>006059</p> |

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.