



Jolt® | K-30618

Two-handle laundry and utility sink faucet

Features

- Plain-end swing spout
- Two Lever handles offer separate control of hot and cold water
- Aerated flow
- 4.0 gpm (15.1 lpm) minimum flow rate at 20 psi (1.3 bar)
- Quarter-turn washerless ceramic disc valves
- Less drain



Available Colors/Finishes

Color tiles intended for reference only.

■ CP Polished Chrome



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-13-2026 20:00 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 372

NSF/ANSI/CAN 61

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 7" (178 mm)

Flow Rate

Faucet Flow Rate: 4 gpm (15.1 l/min)

Valves

Included Valves: Ceramic disc, Volume Control

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-13-2026 20:00 - US-CA

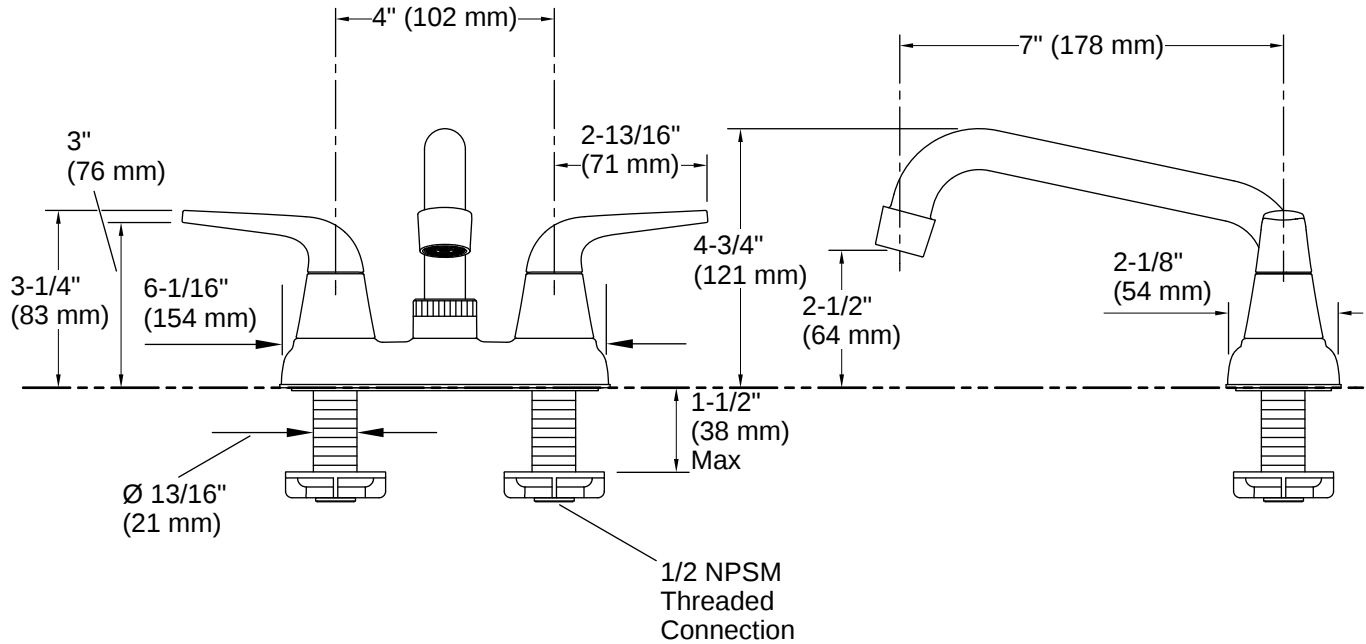

Installation

- For 4" (102 mm) centers
- Three-hole installation

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-13-2026 20:00 - US-CA