



Undertone® Preserve® | K-3171-HCF

31-1/2" undermount double-bowl kitchen sink

Features

- 36" minimum base cabinet width
- Double-equal bowls
- 9-1/2" (241 mm) depth provides generous workspace
- Innovative Preserve™ sink resists scratching and withstands everyday wear and tear
- Rear drain placement increases cabinet storage space underneath sink
- Includes sink rack
- Includes installation hardware



Sustainability



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 01:33 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.3/CSA B45.4

Technical Information

All product dimensions are nominal.

Drain Hole Diameter:	3-3/4" (94 mm)
Minimum Base Cabinet Width:	36" (914 mm)
Basin Configuration:	Equal Bowls
Left Basin Length:	14" (356 mm)
Left Basin Width:	15-3/4" (400 mm)
Left Basin Depth:	9-1/2" (241 mm)
Right Basin Length:	14" (356 mm)
Right Basin Width:	15-3/4" (400 mm)
Right Basin Depth:	9-1/2" (241 mm)

Material

- Premium 18-gauge stainless steel

Recommended Products/Accessories

K-23726 Drain treatment

K-23729 Stainless steel cleaner

K-6388 Stainless steel sink rack, 13-7/8" x 15-3/16"

K-3294 Hardwood cutting board, for Undertone®, Cadence®, Iron/Tones®, and Toccata® kitchen sinks

K-8801 Sink drain and strainer with tailpiece

K-8799 Sink drain and strainer basket, less tailpiece

K-11352 Disposal flange with stopper



Warranty

See website for detailed warranty information.



KOHLER® Stainless Steel Sinks Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 01:33 - US-CA

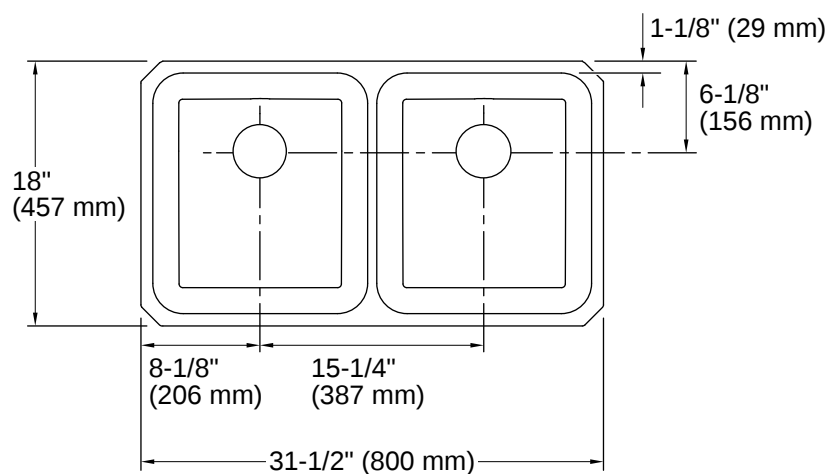

* Allow clearance around sink rim for clip attachment.

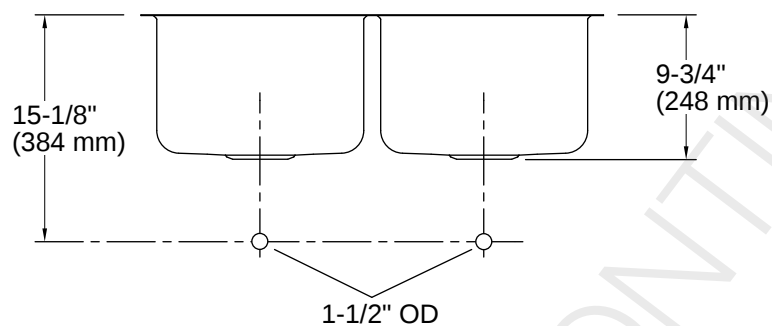

Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

Allow a minimum of 2" (51 mm) clearance around the sink rim for clip attachment.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-30-2026 01:33 - US-CA