

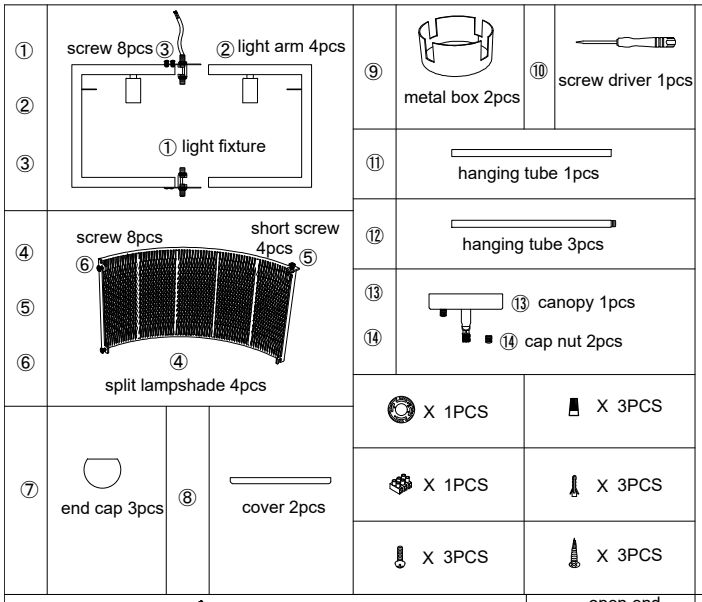


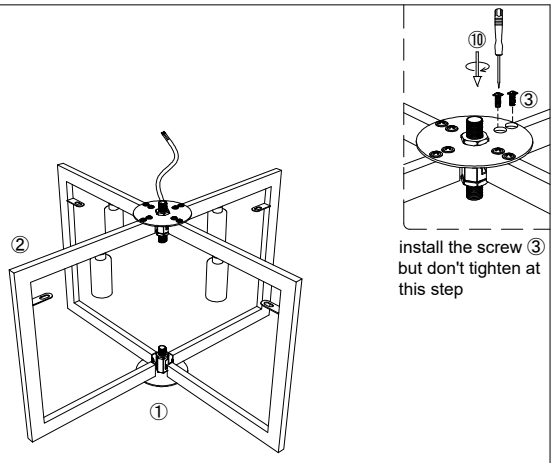


install the screw ③ but don't tighten at this step


1.Adjust the light arm ② to suitable position like picture shown and use the screw driver ⑩ to install the light arm ② to the metal round plate of fixture up and down. (don't tighten the screws ③ at this step)

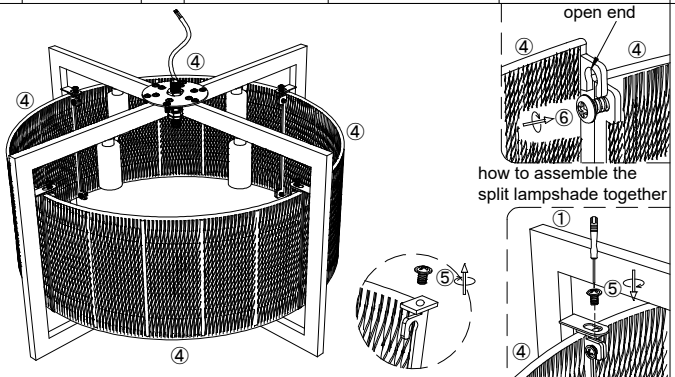


2.Put the split lampshade ④ into the light fixture ① and adjust them even to each other, assemble the lampshades together with screw ⑥.(don't tighten the screws ⑥ before adjust the lampshade even, rotate to fasten the screws ⑥ at last)
3.Install the lampshade to the fixture ① with screw ⑤.(don't tighten the screws ⑤ until all screws ⑤ are ready in the hole of the fixture, rotate to fasten the screws ⑤ and screws ③ at last)

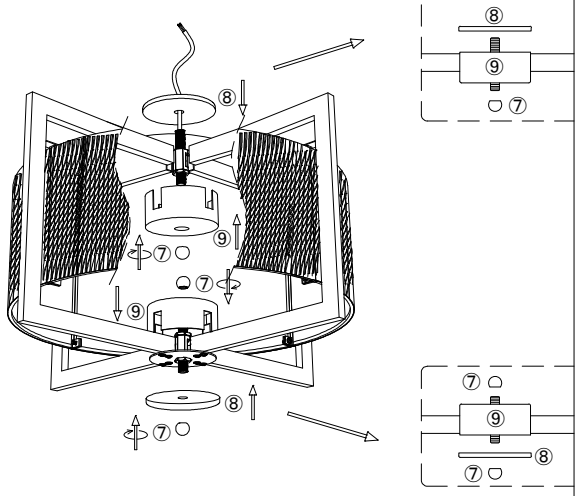



4.Rotate the end cap ⑦ to install the metal box ⑨ and cover ⑧ to the fixture up and down .(all wire should be inside the box ⑨ to avoide damage)

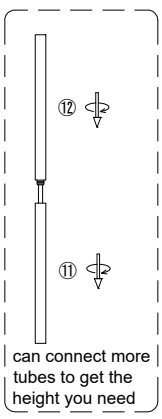

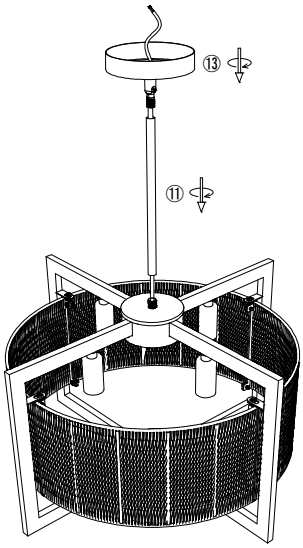

5.Let the wire of the fixture go through the tube ⑪ and canopy ⑬, rotate to install all parts to the fixture.(can connect more tubes to get the height you need)



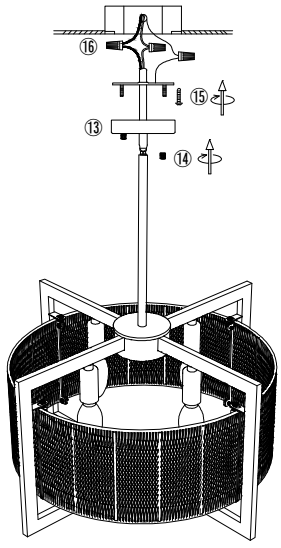

6.Install the bracket to the ceiling junction box with screw ⑮.
7.Connect the wire to your home line with cap connector ⑯.
8.Install the fixture to the bracket with cap nut ⑭.
9.Install the bulb ⑰. (bulbs are not included in the package)

D9138-4

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !