

Installation and Wiring Instructions:

NOTE: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURE
IMPORTANT: YOU SHOULD USE A QUALIFIED ELECTRICIAN TO INSTALL THIS FIXTURE

Installation

1. Connect the chain(B) with steel tube(A).

2. Pass the fixture wire(C) through the steel ceiling plate(D).

3. Fix the mounting plate(E) to the outlet box(F).

4. Wiring:

1). Split the conductors of the fixture wire about 4 inches. Being careful not to expose any of the wire inside of the insulation.

2). Connect the fixture ground wire to the outlet box ground wire using wirenut.

3). Connect the half of the fixture wire(C) that is white marked(Neutral Wire) to the outlet box supply wire(White). Connect the other half of the fixture wire that is black marked(Live Wire) to the outlet box supply wire (Black or Red). Use wirenuts provided.

4). Spread the electrical supplies so that the black wire are on one side of the outlet box and white wire are on the other side.


5. Fix the steel ceiling plate(D) to the mounting plate(E) with Mouting Screw(H) and Screw Cap(G).

6. Install the 3pcs glass shades onto the steel tube(A).

Recommendation: Maximum 60 WATT Type ST64 or ST58 Edison bulb(3pcs bulbs included. Pls take care when assembling as it's fragile).

Cleaning of your lamp:

Turn power off. Wipe with a damp cloth. Do not use abrasives.

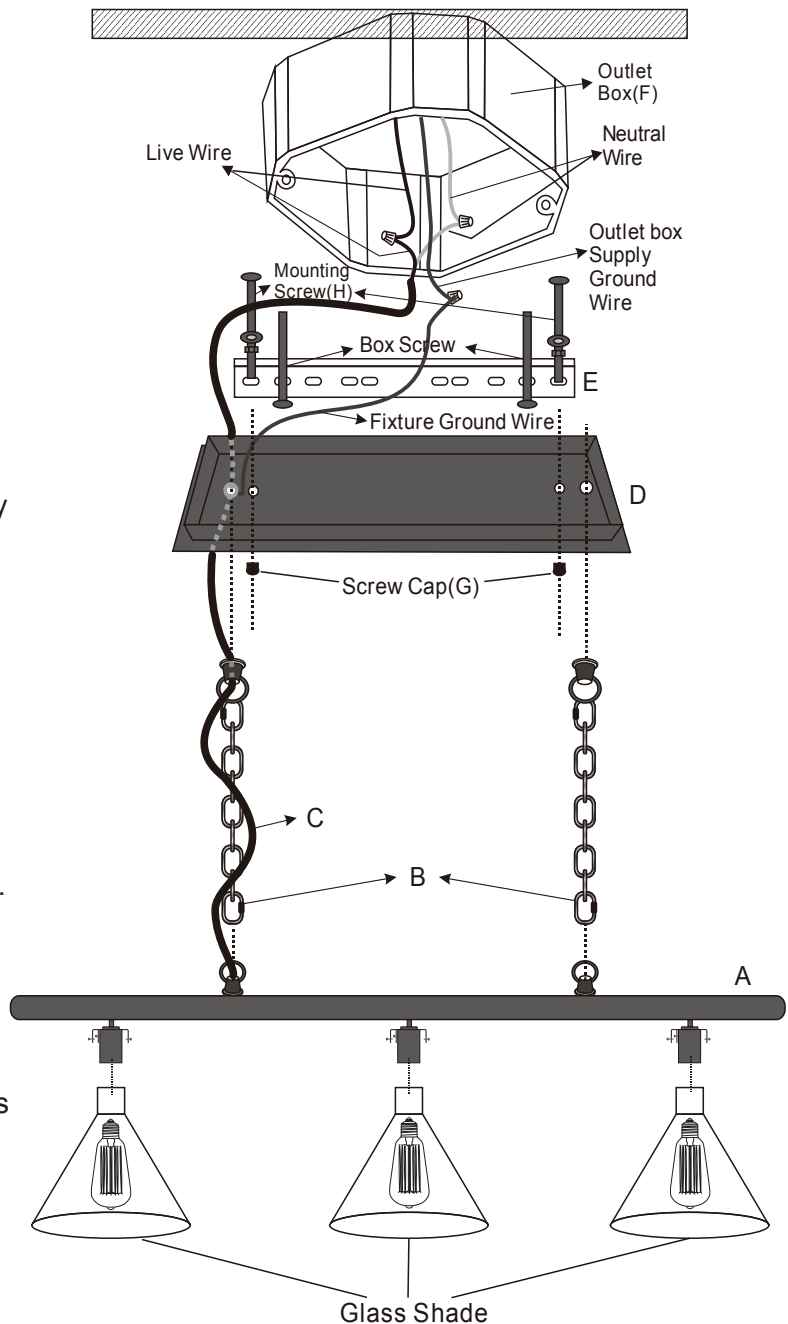

***SAVE THIS INSTRUCTION FOR FUTURE REFERENCE.**

MADE IN CHINA