COMMERCIAL

Refrigeration Equipment Reach-In Refrigerator, 1 Door, 23 cu.ft - Stainless Steel (R290)

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



738241 (KCHRI27R1DRE)

1-door reach-in refrigerator, stainless steel, 23 cubic feet, R290 refrigerant gas, +33/+41°F - Energy star

Short Form Specification

14000	M-
1114111	MI

1 full door refrigerator with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key.

R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

Main Features

- External temperature display.
- · Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmetal impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.
- Interior LED light to save energy and for best internal visibility.

Construction

- · Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- · Lockable door.
- Pre-wired heavy duty power cord.
- · Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.


Optional Accessories

•	shelf for 27" reach-in	PNC 880590 □
•	shelf clips	PNC 88061

APPROVAL:



Refrigeration Equipment Reach-In Refrigerator, 1 Door, 23 cu.ft - Stainless Steel (R290)

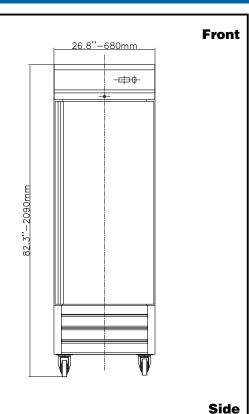

57.5"—1460mm 32.7"—830mm 2.8"—70mm 2.8"—70mm 2.8"—20mm 32.7"—830mm 2.8"—70mm

Electric

Supply voltage:

738241 (KCHRI27R1DRE) 115 V/1 ph/60 Hz

Electrical power, max: 0.3 kW
Current consumption: 3 Amps

Plug type: USA NEMA 5-15P

Key Information:

Door hinges: Right Side

Capacity (Cu.Ft.) 23

External dimensions, Width: 26 3/4" (680 mm)
External dimensions, Depth: 32 11/16" (830 mm)
External dimensions, Height: 82 1/4" (2090 mm)

Number and type of doors:1 FullInternal Dimensions (depth):27 1/16"Internal Dimensions (height):60 1/4"Internal Dimensions (width):24 7/16"

Shipping height:84 5/8" (2150 mm)Shipping weight:306 lbs (139 kg)Shipping volume:49.91 ft³ (1.41 m³)

Number and type of grids

(included):

3 - Vinyl-Coated steel

Type of external material: 430 AISI
Type of internal material: 304 AISI
Warranty: 3 / 5 years

Refrigeration Data

Compressor Horsepower: 1/6
Refrigerant type: R290
Refrigerant weight: 85 g
Operating temperature min.: 32 °F
Operating temperature max.: 41 °F
Condenser type: Fin & tube
Defrost type: Auto Defrost



Refrigerant Inlet Refrigerant Outlet

R0 =





