ASSEMBLY INSTRUCTIONS

Ax1	Backrest
Sx1	Seat
Bx2	Front leg
Cx2	Rear leg
Dx2	Adjust cap
Ex4	M8*60mm Screw
Fx7	M8*50mm Screw
Gx11	M8 Spring washer
Hx11	M8*22mm Flat washer
Kx1	M8 Allen key
Lx1	

① The legs are hidden under the seat frame

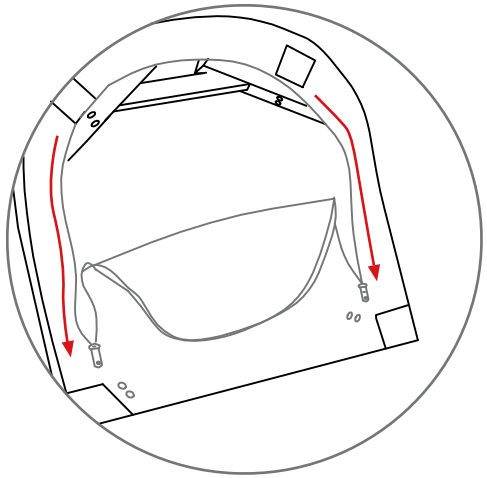

②

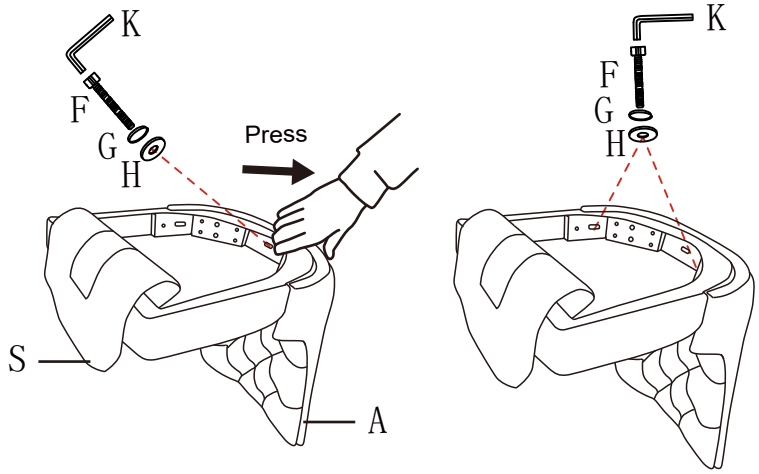

First install the central screw and tighten it to 70%,
then install the screws on both sides and tighten them to 80%

③

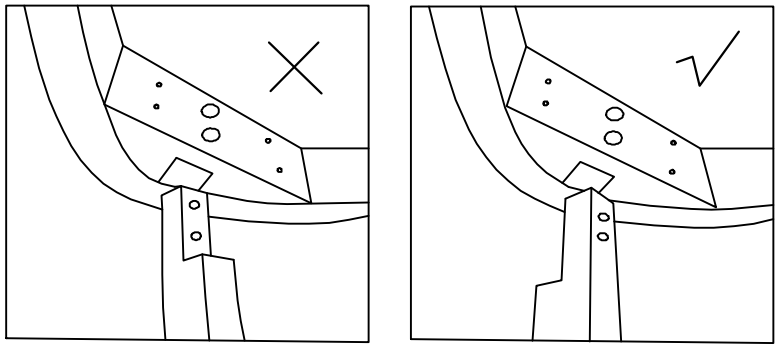

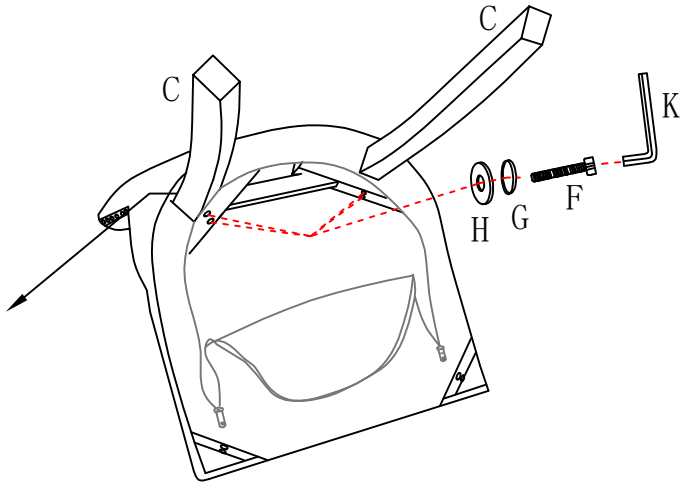

Tighten all the screws to 80% of maximum tightness

WARNING:
DO NOT STAND ON THE PRODUCT, DO NOT USE THIS PRODUCT AS A STEP LADDER.
DO NOT USE THIS PRODUCT UNLESS ALL BOLTS, SCREWS AND KNOBS ARE FIRMLY SECURED.
PLEASE DO NOT USE KNIFE TO OPEN ANY PARTS OF THE BOX OR PRODUCT.

④



Put the front leg in the dotted box place, if you put it in the wrong place, it still can work, but the uneven force will cause the leg to break.

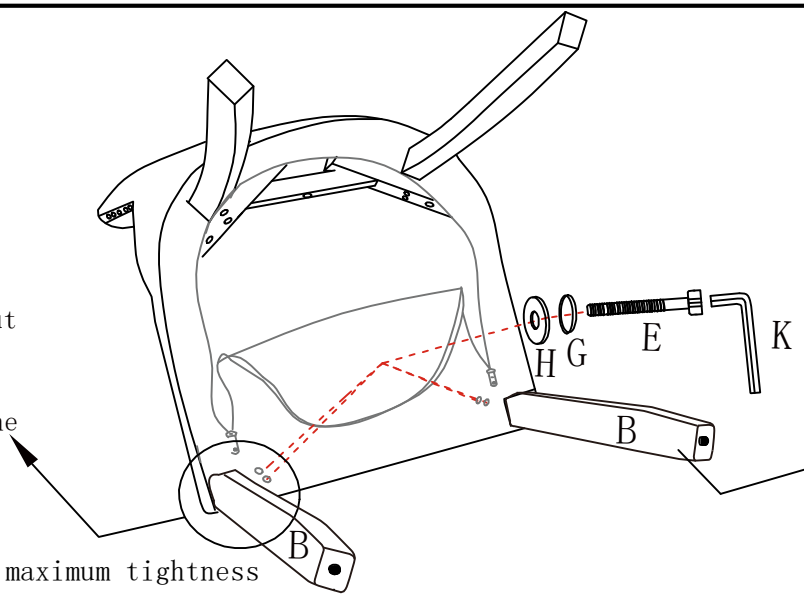

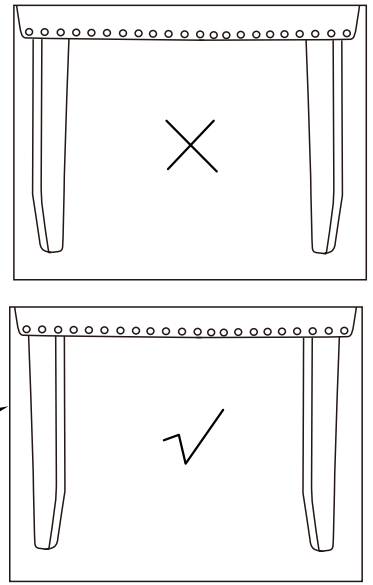

Tighten all the screws to 80% of maximum tightness

⑤

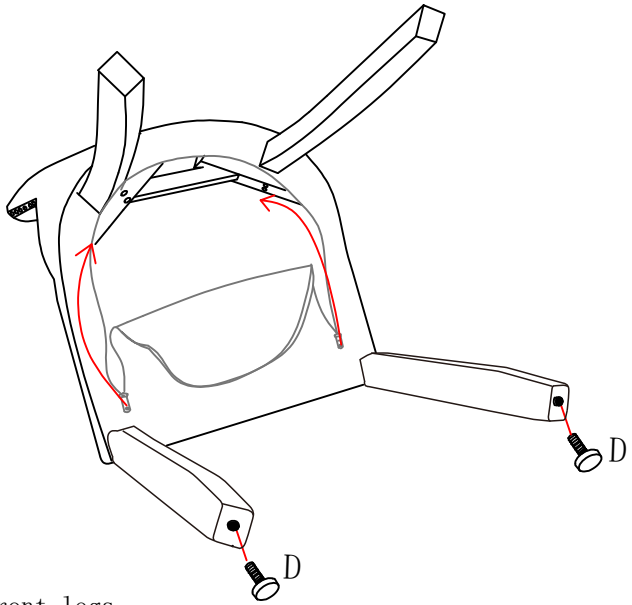

1. screw D into front legs.

2. Carefully sit on the chair and make adjustments to ensure the legs are flat even on the floor.
3. Tighten all the screws to 100% of maximum tightness
4. Close the zipper of bottom Non-Woven fabric.

⑥

There are 2 small adjusters on the front legs , ensure these are adjusted so the chair sits level.

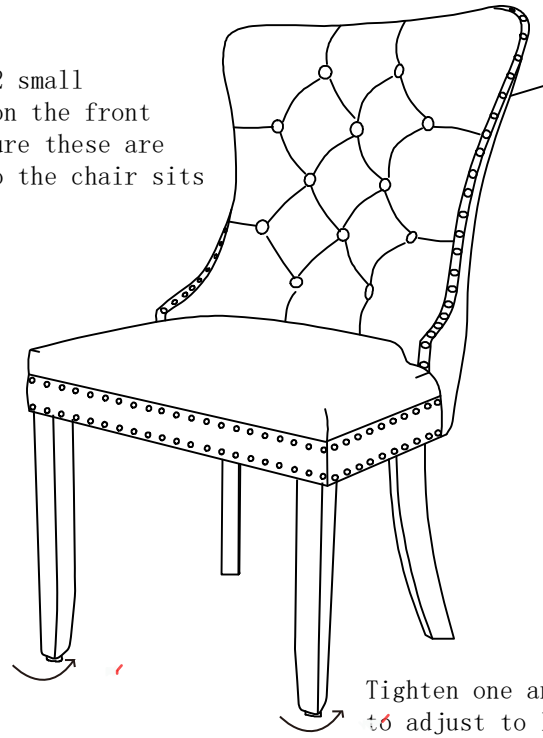



Tighten one and loosen the other, to adjust to level.