


POOL CHAISE LOUNGE


V01

⚠TIPS:

- 1、 You need to place pool loungers in **water depths of 8"-12"** to ensure the best user experience.
- 2、 You need to move **pool loungers out of the pool** during **typhoons of category 5 or higher** to prevent them from being blown into deeper water areas.

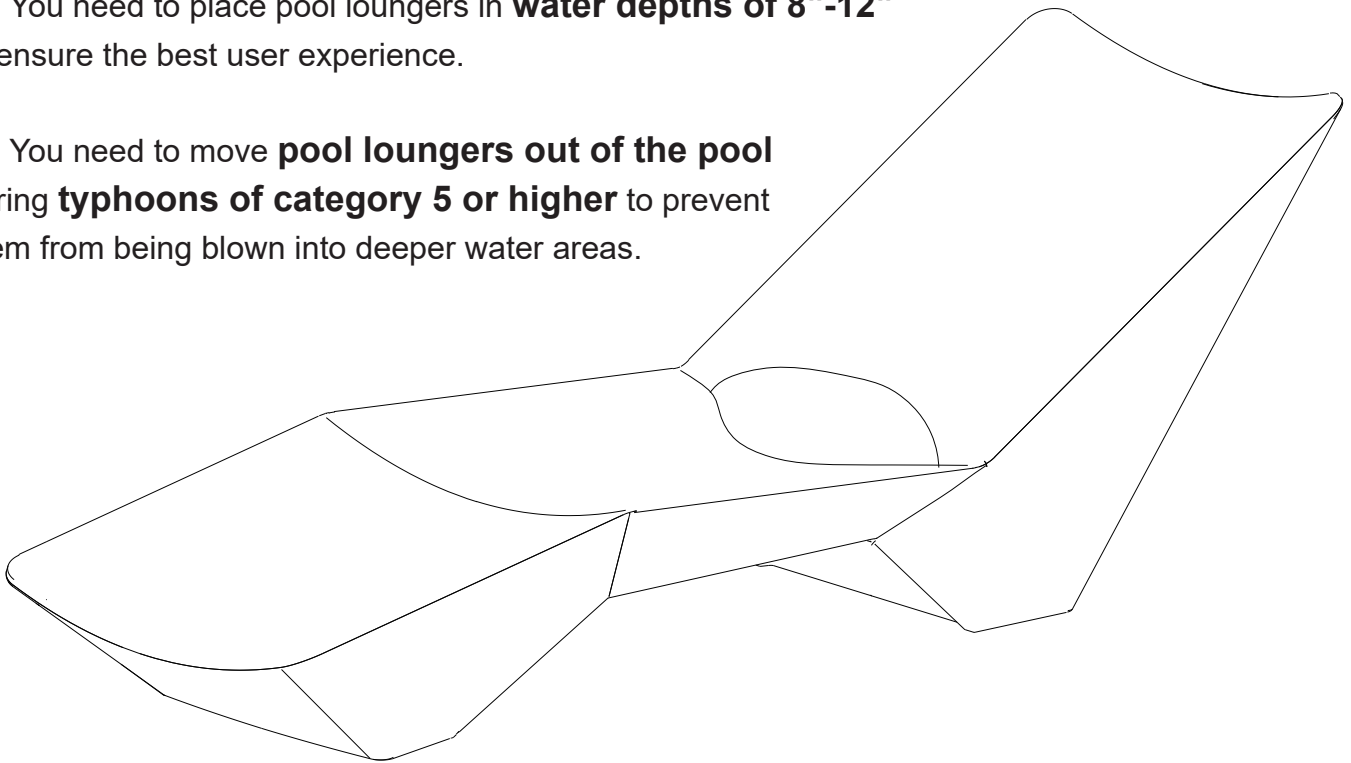


A




1PC

B




1PC

C

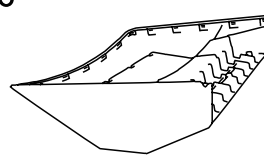

1PC

D



1PC

E



1PC

F




8PCS

G



8PCS

H



1PC

If you need any help or have any questions, please don't worry — feel free to contact us through the platform. We're here for you.

AFTER-SALE

**Dear Valued Customer,
Thank you for choosing this product.**

Every product undergoes strict quality inspection and careful packaging before shipment. However, unexpected issues may occasionally occur during logistics transportation. Please do not worry if you encounter any of the following situations:

- Dented, broken or damaged product and outer packaging after delivery
- Missing accessories or parts when unboxing the package
- Product malfunctions, operational questions or functional abnormalities during use

Two Official Channels to Contact Us for Support

1. Order Backend Message

Send us a message directly through your order page, attach clear real photos of the problem along with your order number.

2. Email

Email us with your order number and relevant photos of the problem for prompt follow-up.


Processing Time Promise:

We will reply and resolve your issue within 24 hours upon receiving your message via either of the above two contact methods.

Once we receive your message, we will check your issue without delay, provide proper solutions wholeheartedly, safeguard your shopping rights and bring you a reassuring and pleasant purchasing experience.


STEP

1

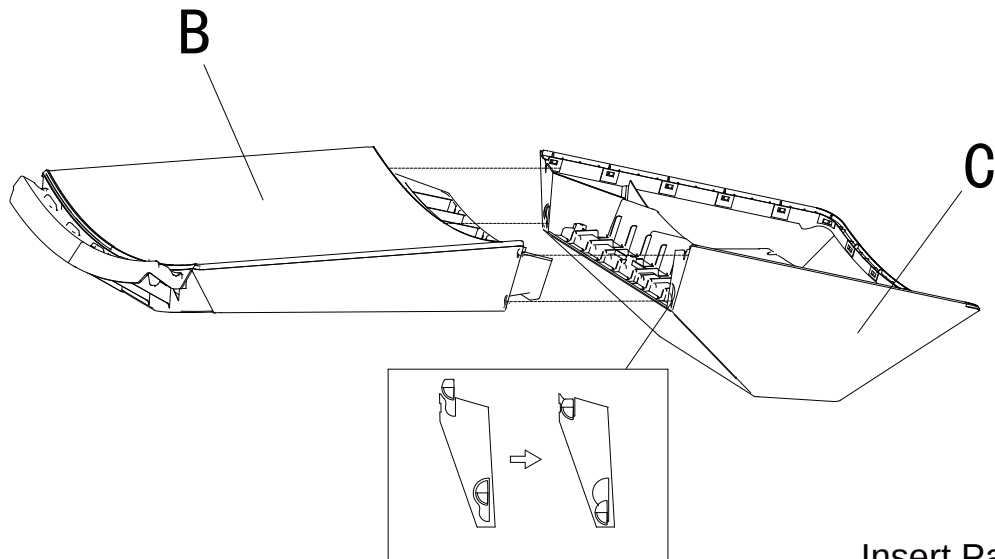


Insert Part B into Part C.

2

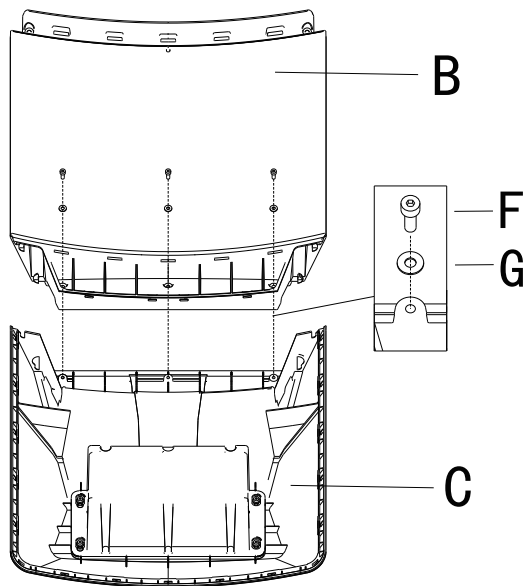

After inserting the parts, secure them with screws.


3

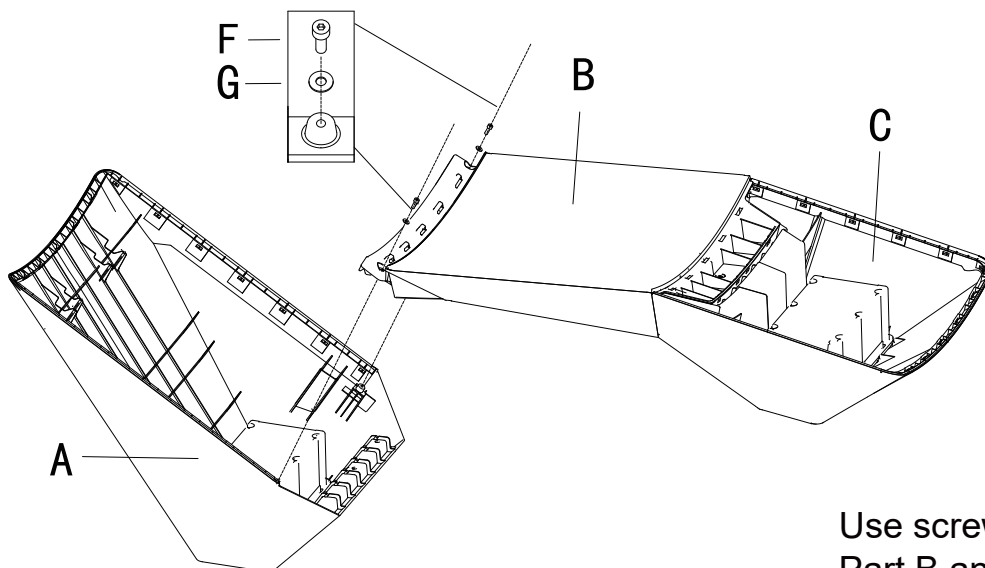

Use screws to connect Part B and Part A.


STEP

4

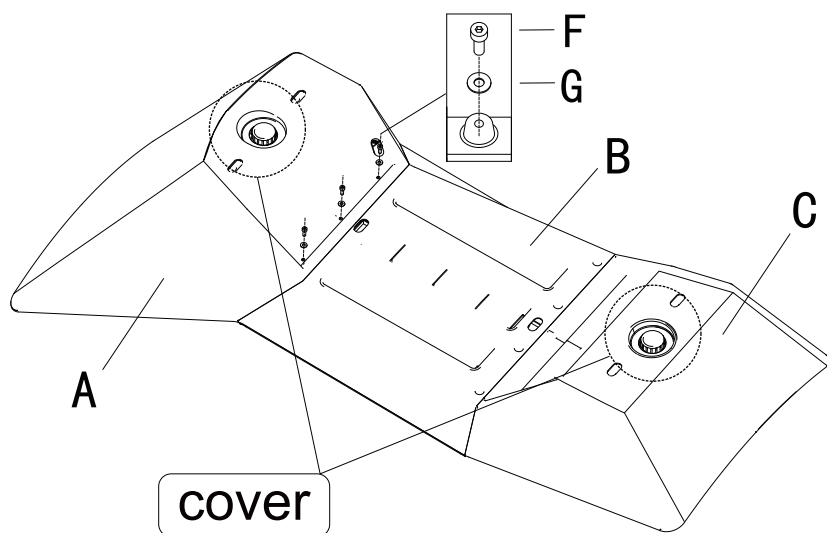


Unscrew the cover and fill with sand or small stones for added stability.

5

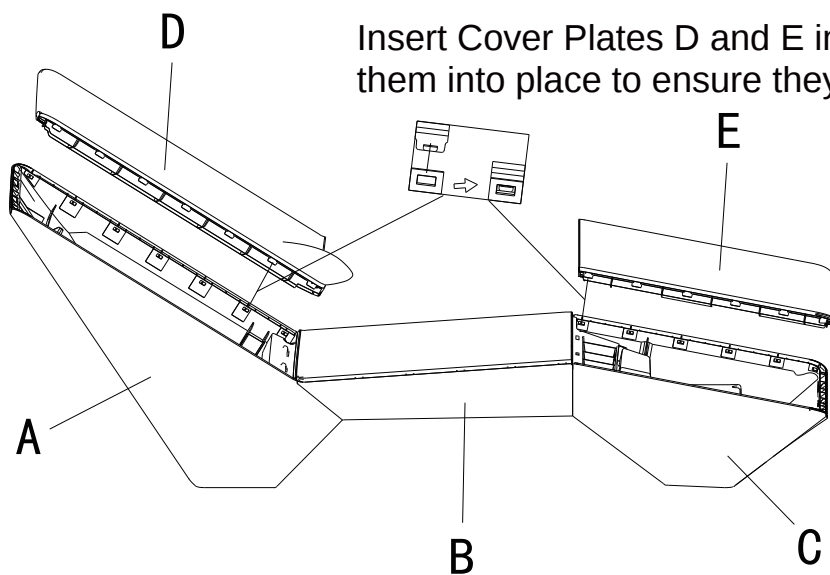

Insert Cover Plates D and E into the designated slots. Tap them into place to ensure they are fully seated.

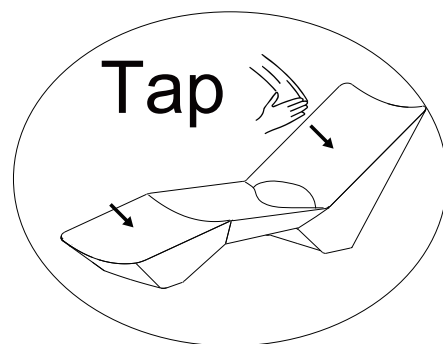

6

Installation Complete

