


INSTALLATION INSTRUCTION

User Manual

Single handle basin and bidet mixer

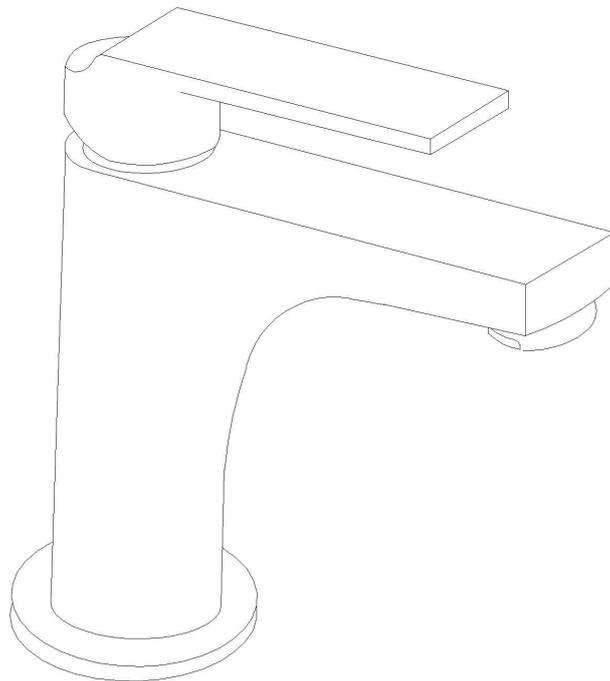

NO.:8110001


INSTALLATION INSTRUCTION

Single handle basin and bidet mixer

Check spare parts:



Please check components correctly in accordance with the below list, after you open the package. Any components missing, please contact local dealer.

- Attention: 1.If the spare parts will be changed which don't infect the product, we won't inform it.
 2. Check product surface with real image, the drawing is for your reference.
 3. Check the pop-up according the real one to select the installation instruction of pop-up.

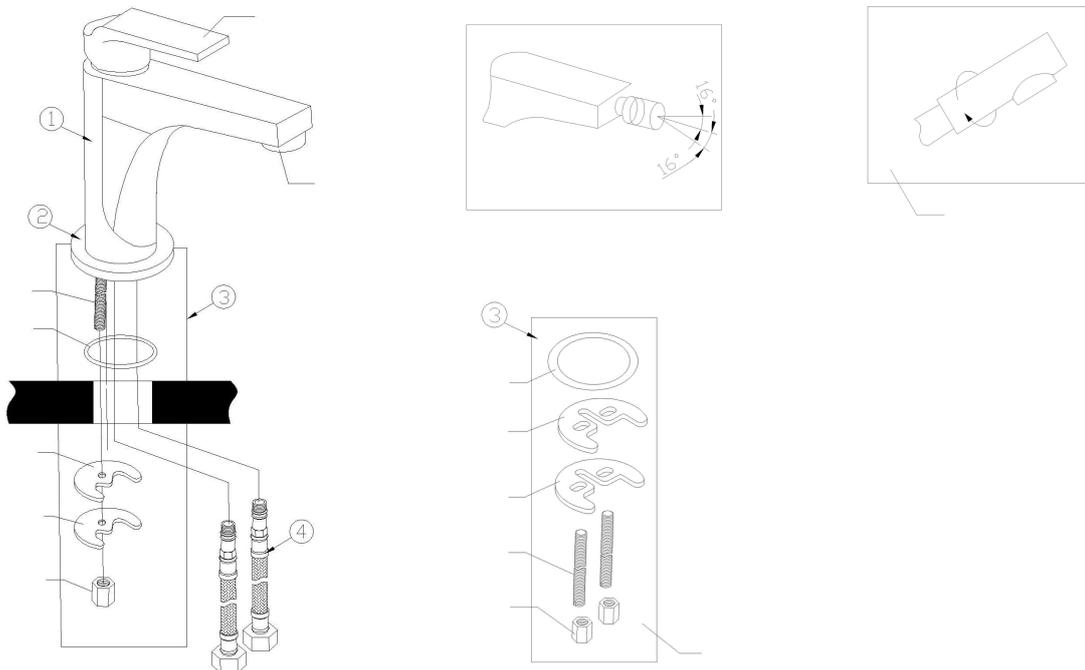

IMPORTANCE FOR INSTALLATION BEFORE YOU START

1. Thank you for using our high quality products. The product has passed factory inspection and been adjusted well before ex-factory, please do not disassemble by yourself.
2. Before installation, please make sure none of dirt in the pipes to prevent faucet jam.
3. After installation, Please check leakage cases for all connectors.
4. Normal working pressure: 0.05-1.0Mpa (both cold and hot water pressure). Suitable water temperature:4°C-90°C.
5. Tap should be connected with hot-cold flow pipe correctly, hot water is on the left and cold water on the right facing on the tap.

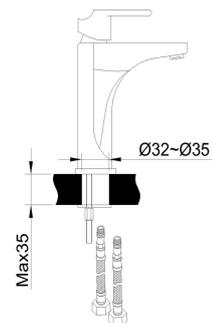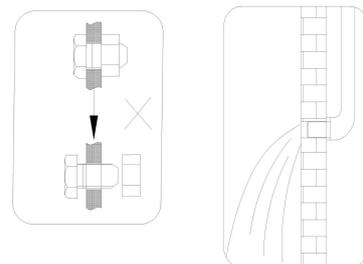


INSTALLATION PROCESS

The installation hole of the mixer must same as the instruction. Install the mixer according the drawing, fix the hose with the mixer body and pipe.

INSTRUCTION

Handle usage:


1. Turn the handle up, the water runs out; contrary, turn off.
2. Turn handle left, flow of hot water enhances when flow of cold water will be lessens; temperature of water is up; reversely, the temperature of water is down.

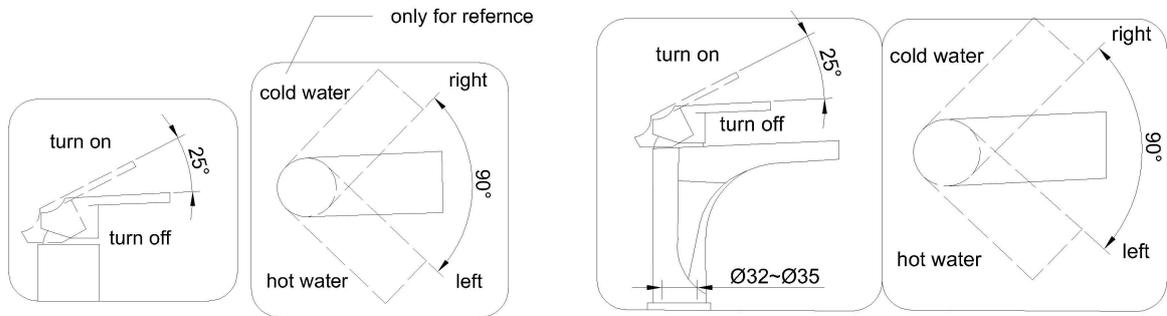

CLEANING AND MAINTENANCE


To protect the brightness and function of mixer, please maintain mixer according the below ways:

1. Wash by clean water, wipe up by soft linsey-woolsey;
2. Clean exterior dirt by warm, mild liquid or colorless glass fabric cleanser, or shine liquid, but not via frictional functions;
3. No usage of the cleaner, liquid, emery cloth, paper with frictional function or drawknife and the acid cleaner, on-dissolved solid cleaner, soap and so on;
4. No usage of in the using course, dirt may be cumulated in aerator, causing the water flow to be blocked; so you can turn-on aerator, clean it, then fit as before.



POP-UP INSTALLATION INSTRUCTION

Choose the installation method according the drainer of your products.

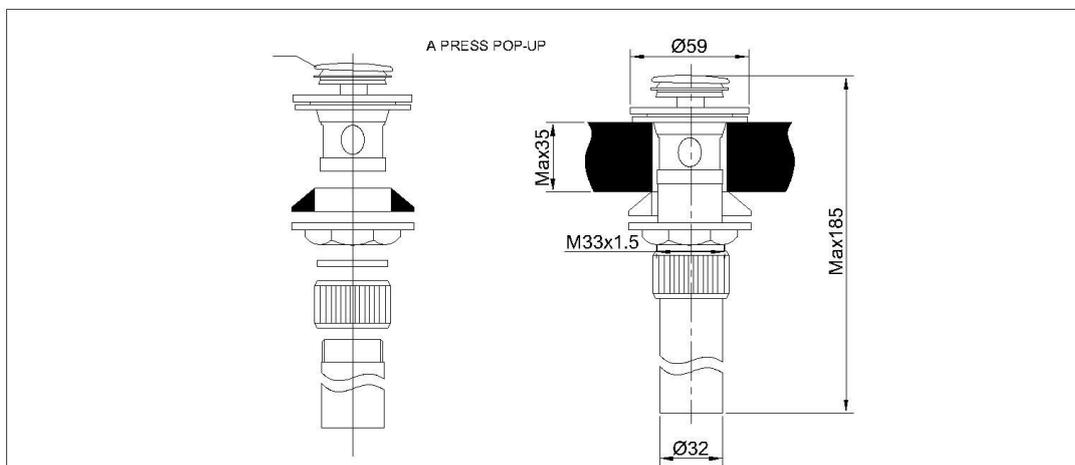

CLEANING AND MAINTENANCE


To protect the brightness and function of mixer, please maintain mixer according the below ways:

1. Wash by clean water, wipe up by soft linsey-woolsey;
2. Clean exterior dirt by warm, mild liquid or colorless glass fabric cleanser, or shine liquid, but not via frictional functions;
3. No usage of the cleaner, liquid, emery cloth, paper with frictional function or drawknife and the acid cleaner, on-dissolved solid cleaner, soap and so on;
4. No usage of in the using course, dirt may be cumulated in aerator, causing the water flow to be blocked; so you can turn-on aerator, clean it, then fit as before.
5. If you find it has dust accumulated in filter, you can open the filter mouth, and wash clearly, then fit it.




Installation instruction of shower and shower hose

Installation instruction of fixed shower

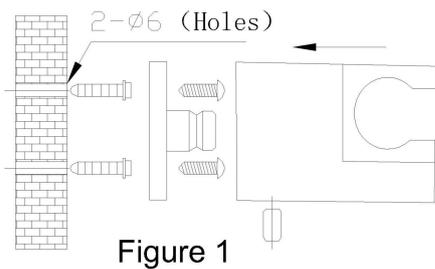

Installation instruction of shower hose

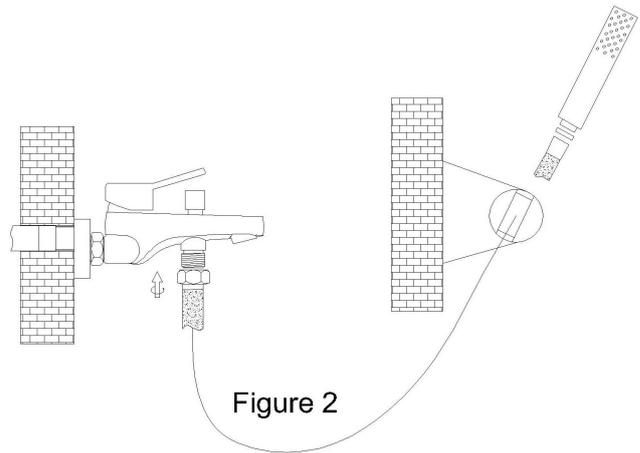


The instruction is only for reference, we hold final recompose and explain authority.



PAST ISO9001 INTERNATIONAL QUALITY AUTHENTICATION

A FULL POP-UP

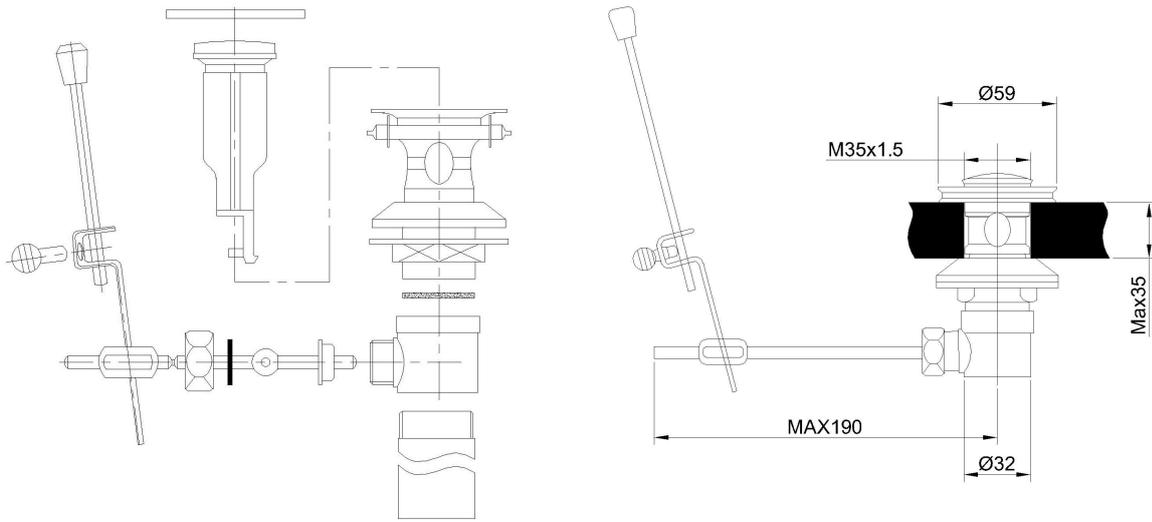

The instruction is only for reference, we hold final recompose and explain authority.




PAST ISO9001 INTERNATIONAL QUALITY AUTHENTICATION

INSTALLATION INSTRUCTION

User Manual

Single handle shower/bath-shower mixer



NO.:811009

INSTALLATION INSTRUCTION

Single handle shower/bath-shower mixer


Check spare parts:

Spare parts list:

Please check components correctly in accordance with the below list, after you open the package. Any components missing, please contact local dealer.

Attention: 1.If the spare parts will be changed which don't infect the product, we won't inform it.

2. Check product surface with real image, the drawing is for your reference.

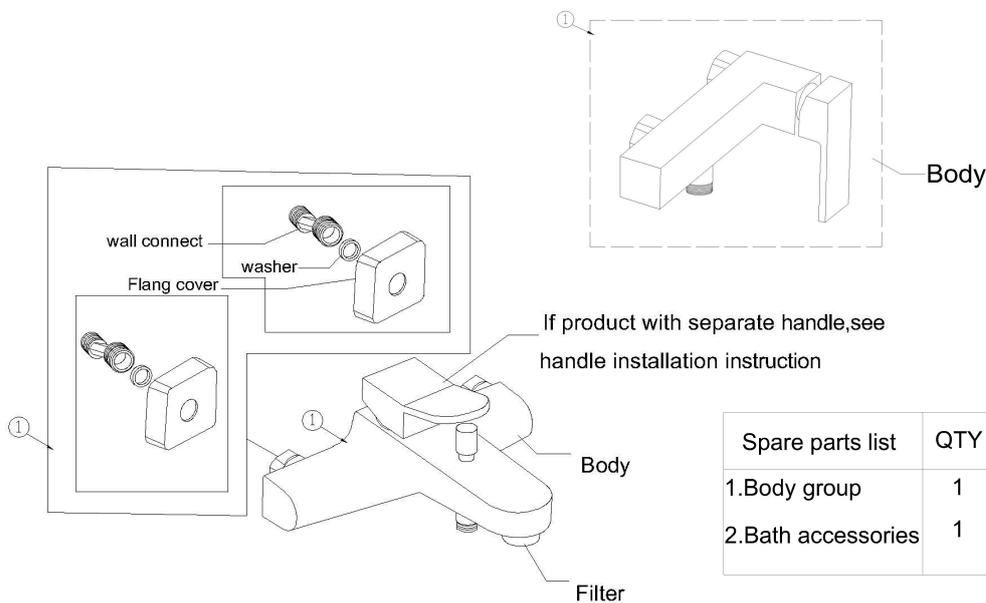

※IMPORTANCE FOR INSTALLATION BEFORE YOU START


1. Thank you for using our high quality products. The product has passed factory inspection and been adjusted well before ex-factory, please do not disassemble by yourself.

2. Before installation, please make sure none of dirt in the pipes to prevent faucet jam.

3. After installation, Please check leakage cases for all connectors.

4. Normal working pressure: 0.05-1.0Mpa(both cold and hot water pressure). Suitable water temperature: 4°C-90°C.

5. Tap should be connected with hot-cold flow pipe correctly, hot water is on the left and cold water on the right facing on the tap.

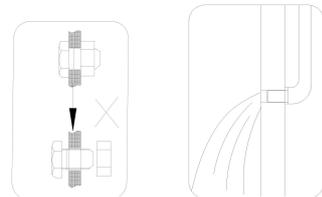

※INSTALLATION PROCESS

1. Install hot & cold pipe in wall, then fix mixer as the figures.

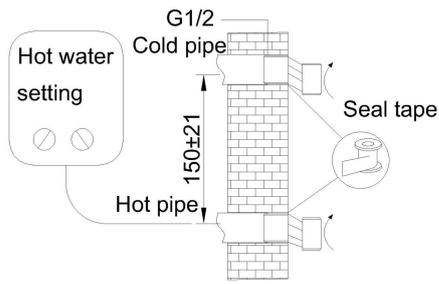


Figure 1

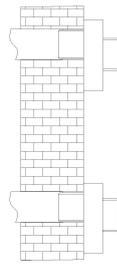


Figure 2

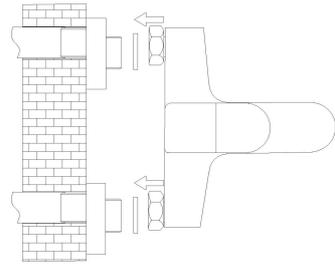


Figure 3

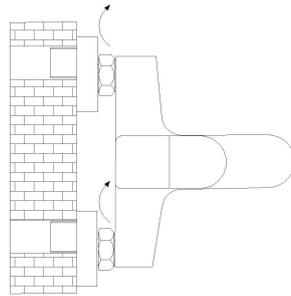


Figure 4

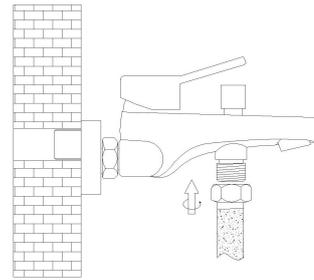


Figure 5

※INSTRUCTION

Handle usage:



1. Turn the handle up, the water runs out; contrary, turn off.
2. Turn handle left, flow of hot water enhances when flow of cold water will be lessens; temperature of water is up; reversely, the temperature of water is down.

☆Please choose the method of diverter according to your product.

Method 1 of diverter:

Lift the diverter, the water comes from shower not filter;

Press the diverter, the water comes from filter not shower;

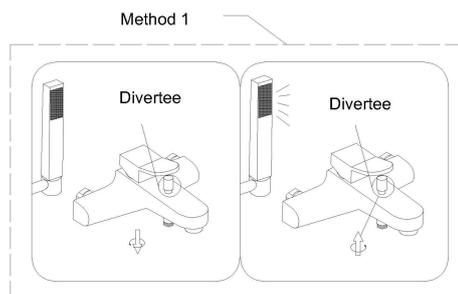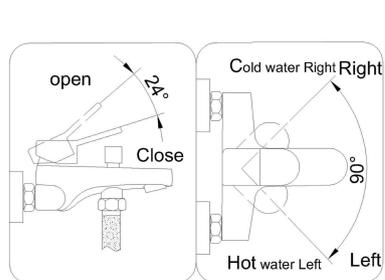

Method 2 of diverter:

Circumgrate the diverter to top by clockwise, the water comes from filter not shower.

Circumgrate the diverter to top by counter-clockwise, the water comes from shower not filter.

