











IMPORTANT NOTICE:
Storing and opening the leaf
requires 2 people.


ASSEMBLY INSTRUCTIONS

Thank you for purchasing this quality product. Be sure to check all packaging materials carefully for small parts that may have come loose inside the carton during shipment.








- Reminders
- 1. Use only the hardware supplied.
 - 2. Do not over-tighten bolts.
 - 3. This item may require periodic tightening.

DDT33678T COMPONENTS LIST			QTY
A	Table Top		1pc
B	Table Leaf		1pc
C	Bottom Rail		1pc
D	Trestle Bar		2pcs
E	Mounting Plate		2pcs
F	Clamp Lock		4pcs
G	Wood Glide		1pc
H	Gear Driven Glide		1pc
I	Cap		2pcs

K	Floor Glide		4pcs
---	-------------	---	------

DDT33678B COMPONENTS LIST			QTY
J	Table Leg		2pcs

Hardware List :


NO	DESCRIPTION	SIZE	FIGURE	QTY
1	Long Bolt	Ø5/16"x 90mm		8pcs
2	Spring Washer	Ø5/16"x 12mm		22pcs
3	Small Flat Washer	Ø5/16"x 14mm		10pcs
4	Allen Key	58x 23x 4mm		1pc
5	Short Bolt	Ø5/16"x 45mm		6pcs
6	Flat Washer	Ø5/16"x 19mm		12pcs
7	Short Bolt	Ø1/4"x 75mm		8pcs

IMPORTANT NOTE:
- Please keep all hardware parts out of the reach of children.
- Two or more people are needed for assembly.

ASSEMBLY INSTRUCTIONS

Step 1.


Attached Table Leg (J) to the Trestle Bar (D) and Bottom Rail (C) using the provided hardware as shown on Fig.1 .

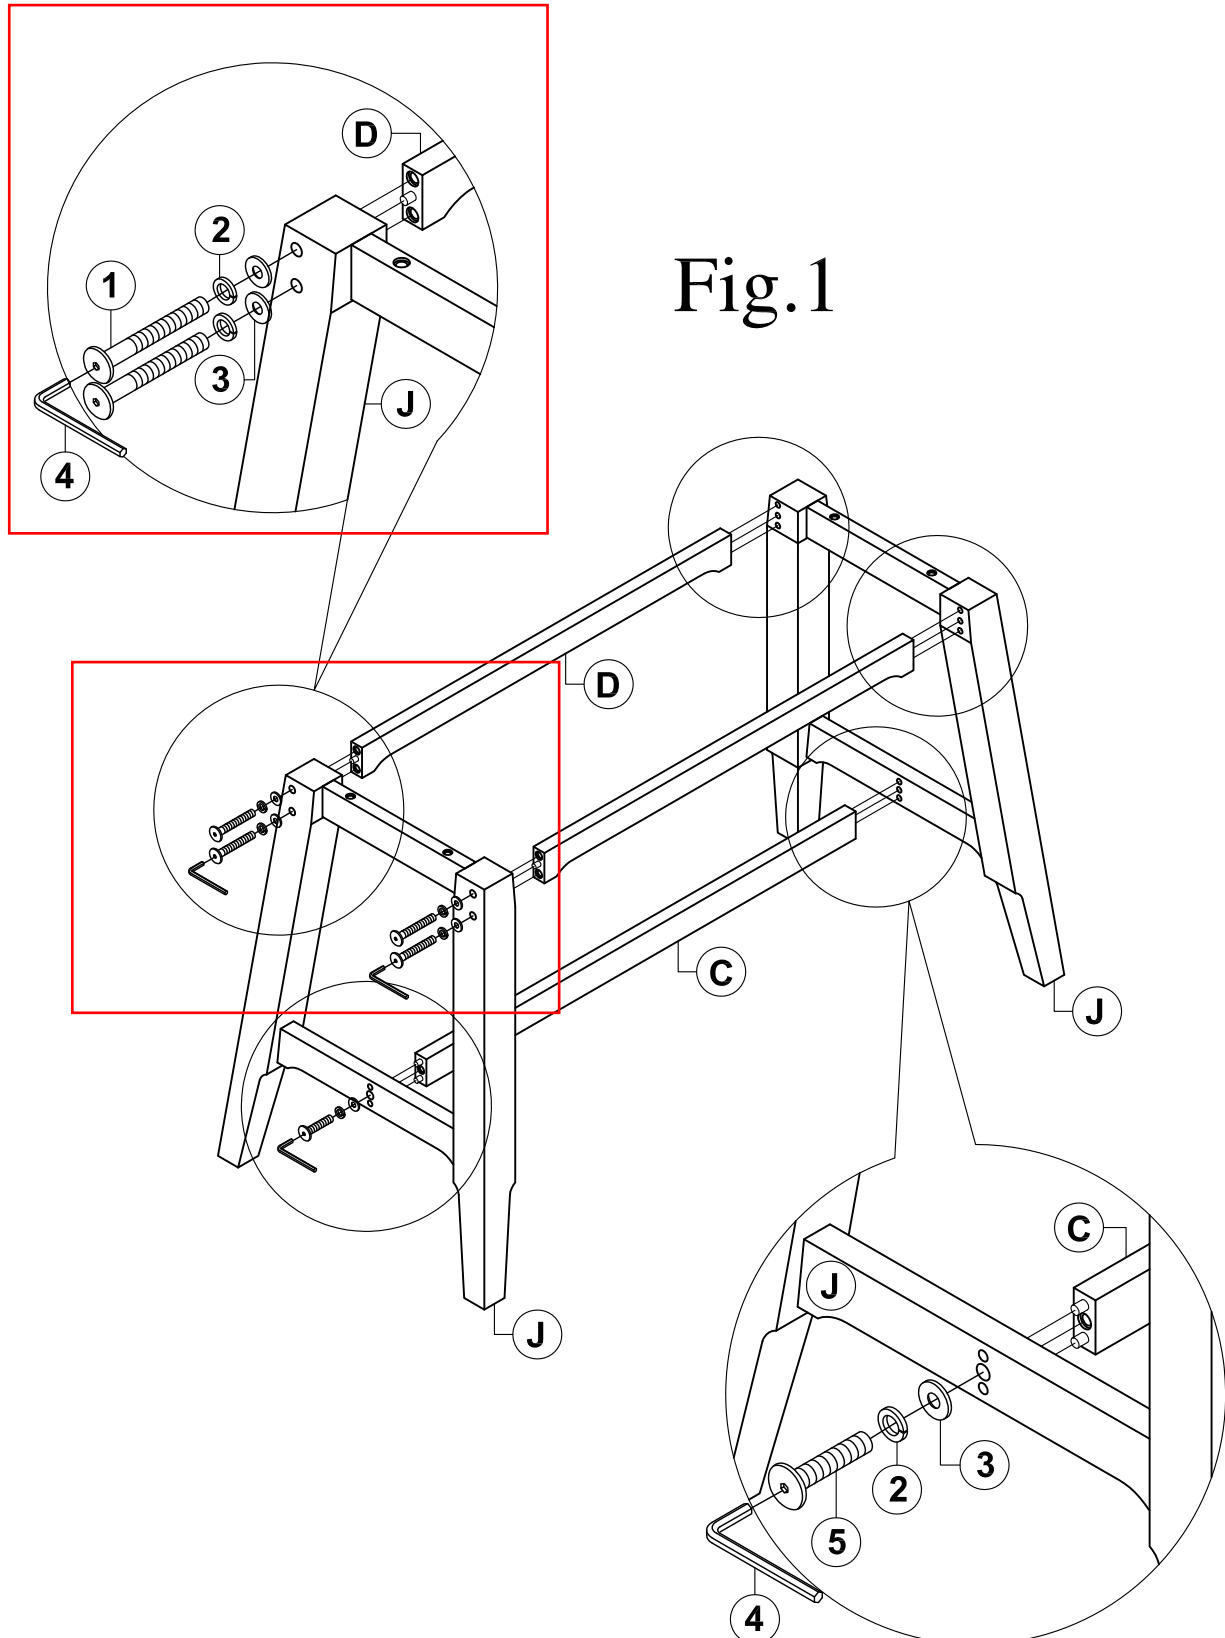

ASSEMBLY INSTRUCTIONS


STEP 2:

Attached Mounting Plate (E) to the Table Leg (J) using the provided hardware as shown on Fig.2.
And add Cap (I) to Table Legs (J) Fig.3.

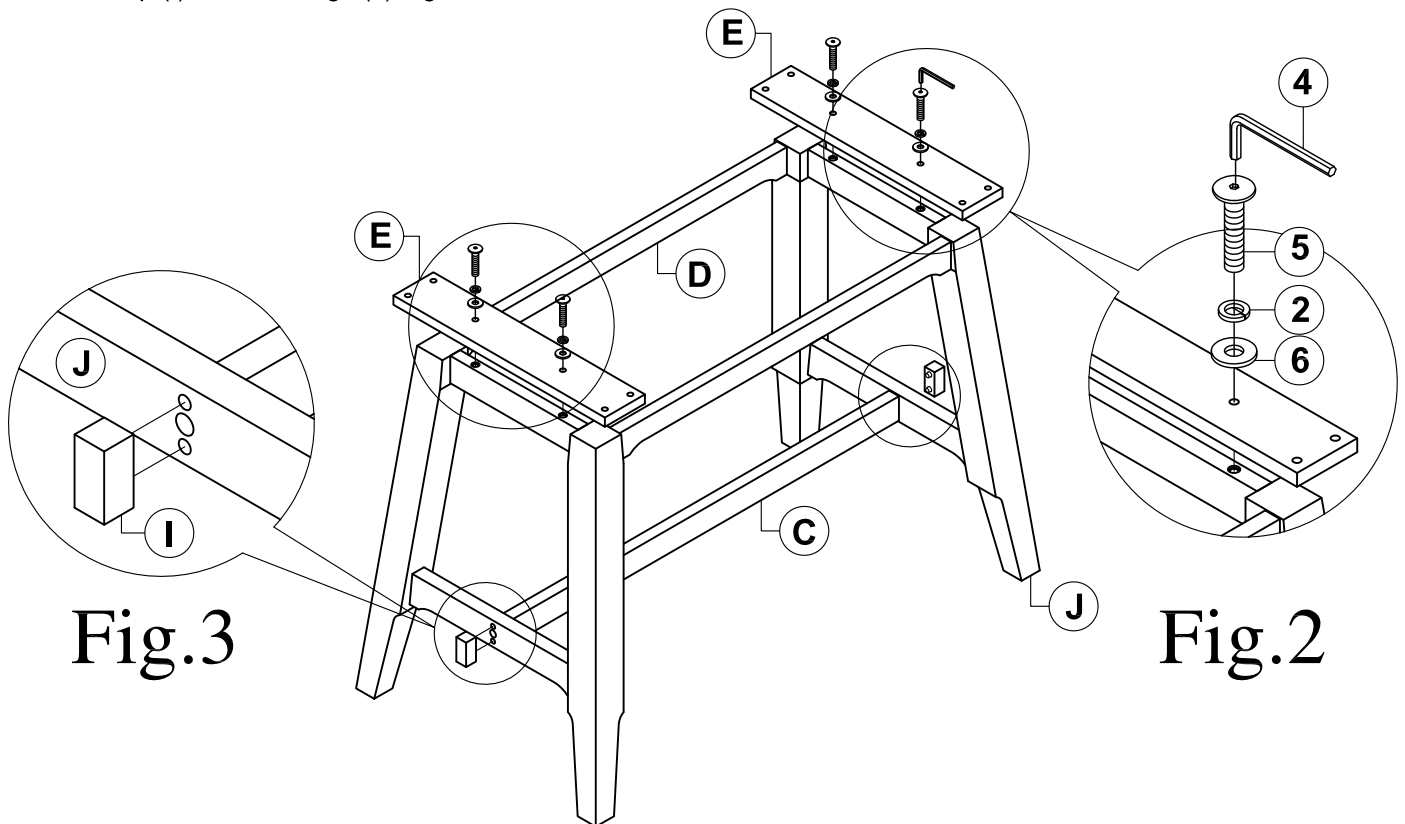

STEP 3:


Place Table Top (A) upside down on a soft protective surface such as a carpet. Turn the table base assembly upside down and attach table leg assembly to the Table Top (A) Using the Provided Hardware as shown in Fig. 4.

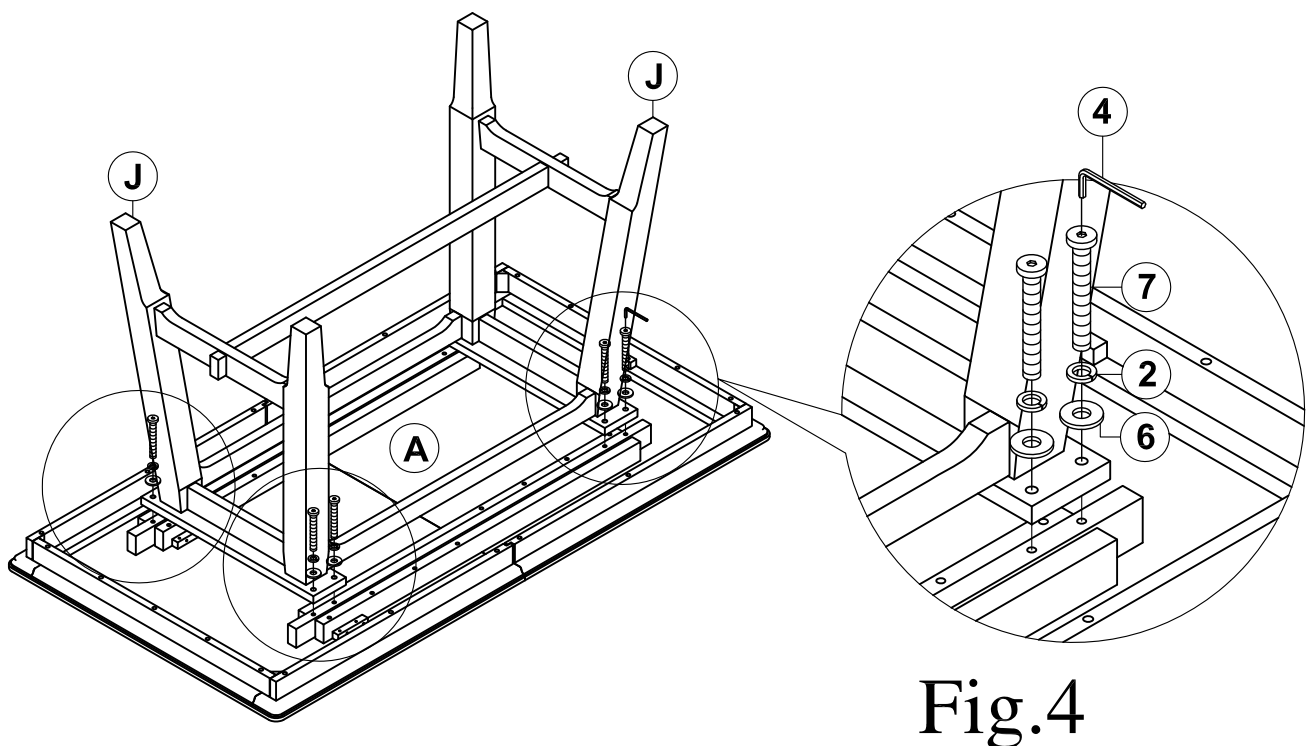

ASSEMBLY INSTRUCTIONS

STEP 4:

- Turn the table to upright position. Unlock the Clamp Locks (F) underneath the Table Top (A). pull from both ends of table top (A).

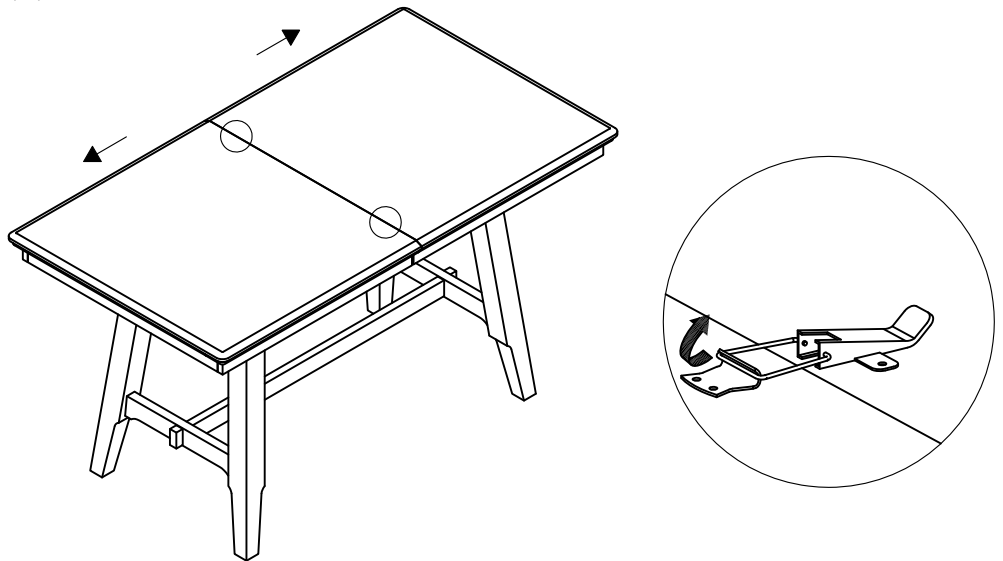

STEP 5:

- Place the Table Leaf (B) in position and push Table Top (A) from both ends to close. Lock the Clamp Lock (F) underneath the Table Top (A) to prevent injury from sliding table top (A).

