




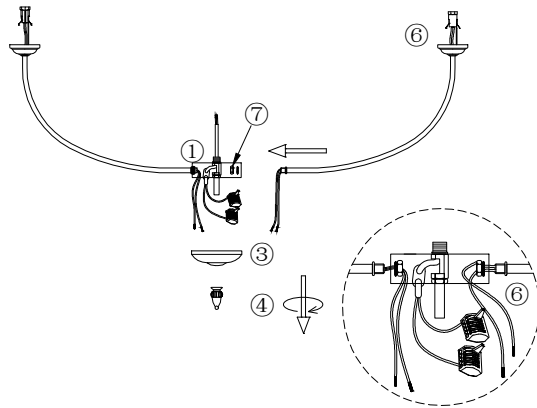


Installation & Assembly


① ② ③ ④ ⑤	 <p>①metal box ⑤threaded rod ②splicing connector ③metal cover ④end cap</p>	⑥ ⑦	 <p>⑥light arm 6pcs ⑦lock nut & teeth lock washer</p>	⑧	 <p>hanging tube 4pcs</p>	⑫	 <p>lampshade 6pcs</p>	 X 1pcs  X 3pcs
				⑨	 <p>hanging tube 1pcs</p>			 X 1pcs  X 3pcs
				⑩	 <p>⑩canopy 1pcs</p>	⑬	 <p>cylinder tube 6pcs</p>	 X 3pcs
				⑪	 <p>cap nut 2pcs</p>			 X 3pcs

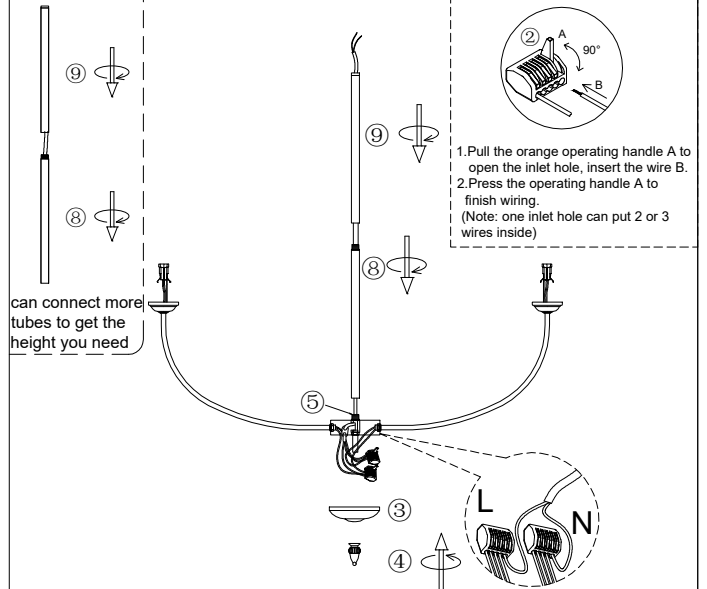

1. Loosen and remove out the cover ③ and end cap ④ from metal box ①.
2. Install the light arm ⑥ to the box ① with lock nut & teeth lock washer ⑦.

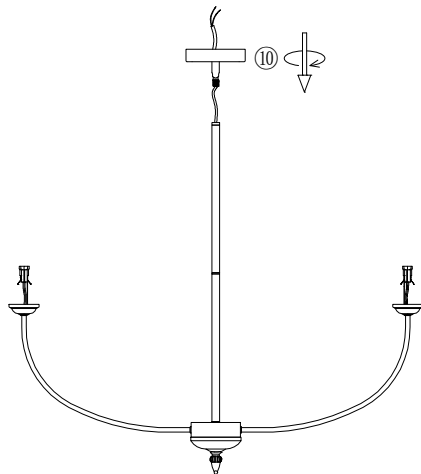

5. Install the canopy ⑩ to the light fixture.

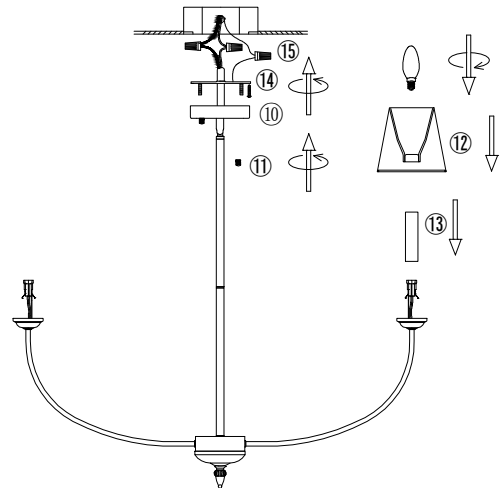

6. Install the bracket to the ceiling junction box with screw ⑭.
7. Connect the wire to your home line with cap connector ⑮.
8. Install the fixture to the bracket with cap nut ⑪.
9. Put the cylinder tube ⑬ and lampshade ⑫ to the bulb holder and install the bulb. (bulbs are not included in the package)

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !