













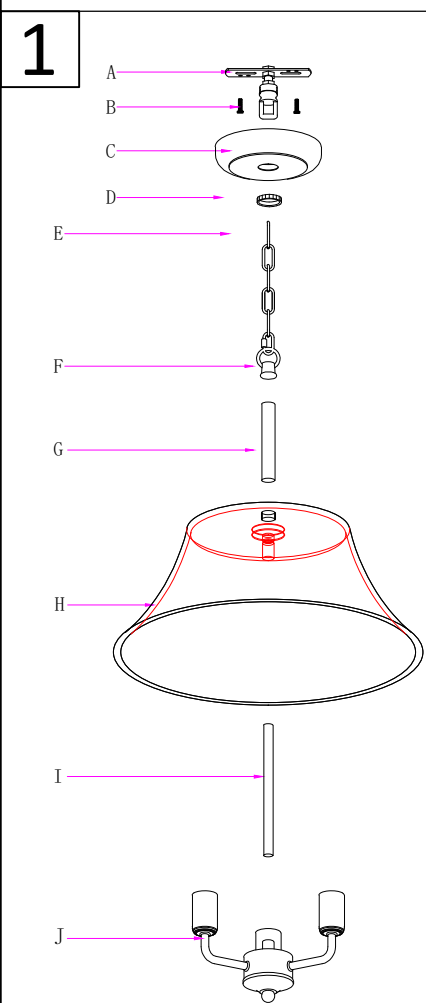


Installation Instruction

Part List and Hardware List


PIECE	PICTURE	DESCRIPTION	QUANTITY
A		Hanging plate	1X
B		Self-tapping screw	2X
C		Ceiling plate	1X
D		Ceiling plate lock ring	1X
E		Hanging chain	1X
F		Lifting ring	1X
G		Thick round tube	1X
H		Glass lampshade	1X

PIECE	PICTURE	DESCRIPTION	QUANTITY
I		Thin round tube	1X
J		E12 lamp holder	1X
O		Wire connector	3X
P		black wire	1X
Q		white wire	1X
R		Earth wire	1X




Step 1:

- 1.First, fix the (A) hanging plate to the ceiling with (B) self-tapping screws.
- 2.Then connect the (I) thin round tube to the (J) E12 lamp holder, and then connect it to the metal part inside the (H) glass lampshade.
- 3.Next, connect the (G) thick round tube to the nut on the top of the (H) glass lampshade, and then connect the (F) lifting ring to the (E) hanging chain.

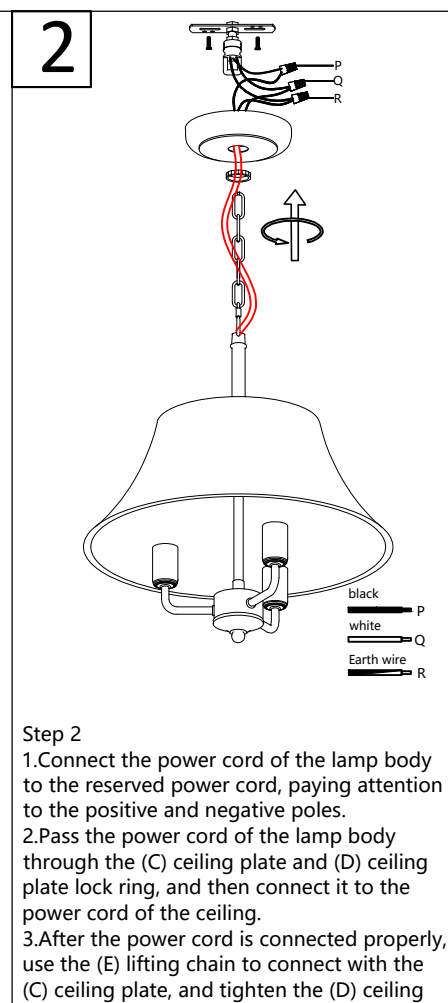

Step 2

- 1.Connect the power cord of the lamp body to the reserved power cord, paying attention to the positive and negative poles.
- 2.Pass the power cord of the lamp body through the (C) ceiling plate and (D) ceiling plate lock ring, and then connect it to the power cord of the ceiling.
- 3.After the power cord is connected properly, use the (E) lifting chain to connect with the (C) ceiling plate, and tighten the (D) ceiling plate lock ring with the (C) ceiling plate.

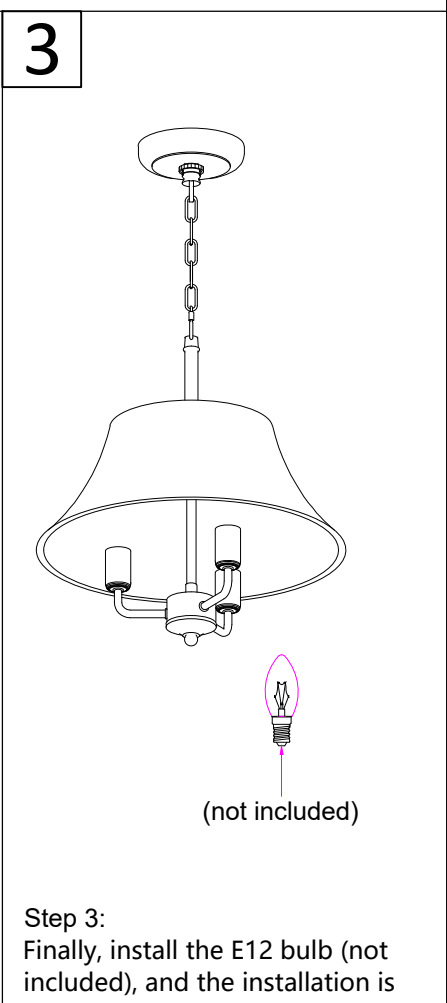

Step 3:

Finally, install the E12 bulb (not included), and the installation is completed.

(not included)