



K-13770

Bathroom sink gooseneck spout with aerator

Features

- Stationary gooseneck spout
- Standard aerator
- Lower flow aerator options are available
- Flange
- External NPT connection
- 2.2 gpm (8.3 lpm) maximum flow rate at 60 psi (4.14 bar)



Available Colors/Finishes

Color tiles intended for reference only.

■ CP Polished Chrome



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 22:08 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992

Technical Information

All product dimensions are nominal.

Spout

Spout Reach: 5" (127 mm)

Flow Rate

Faucet Flow Rate: 2.2 gpm (8.3 l/min)

Valves

Included Valve: Thermostatic Mixer

Material

- Brass

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



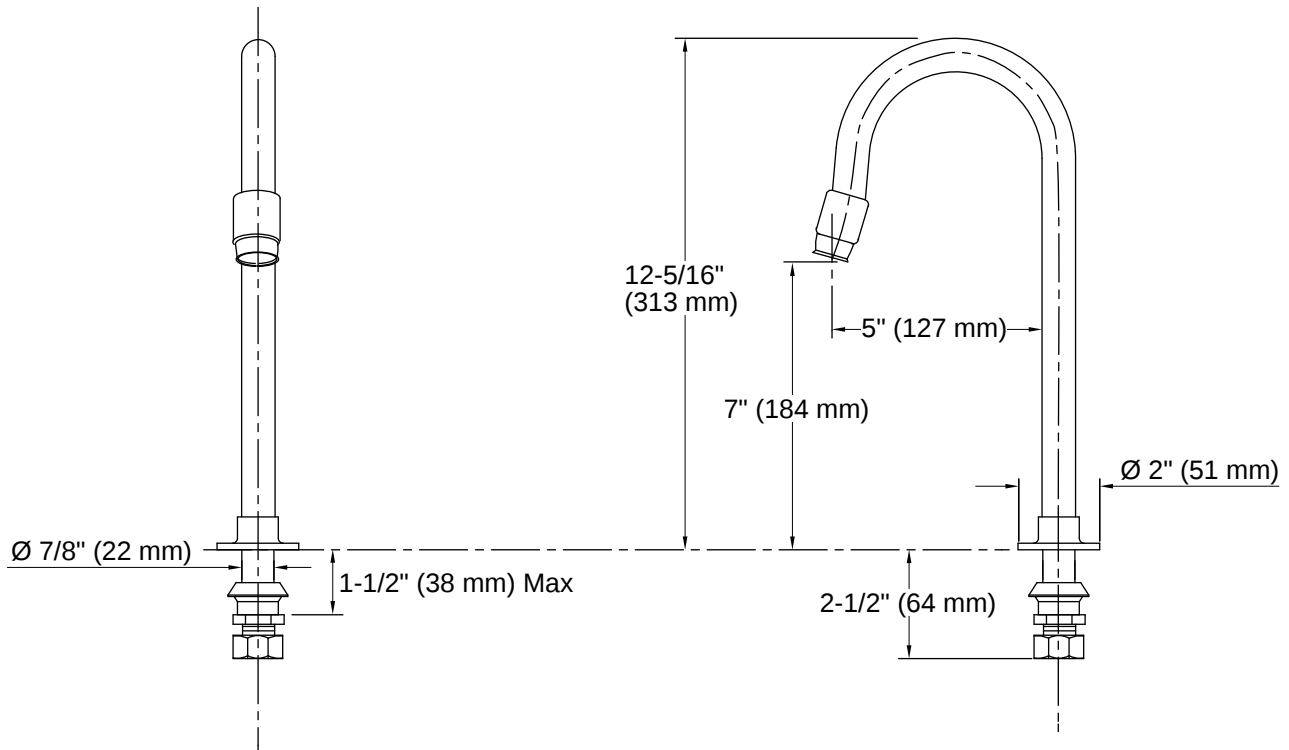

Installation Notes

Install this product according to the installation instructions.

