






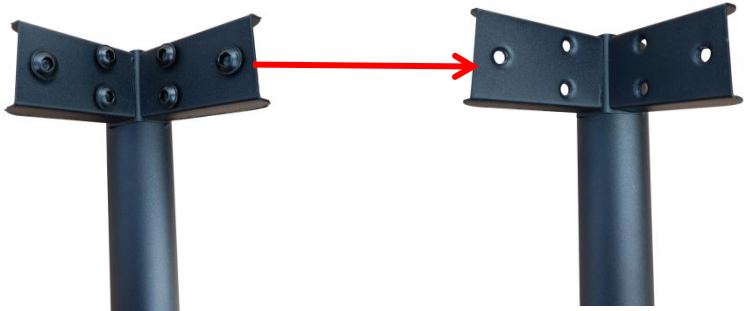

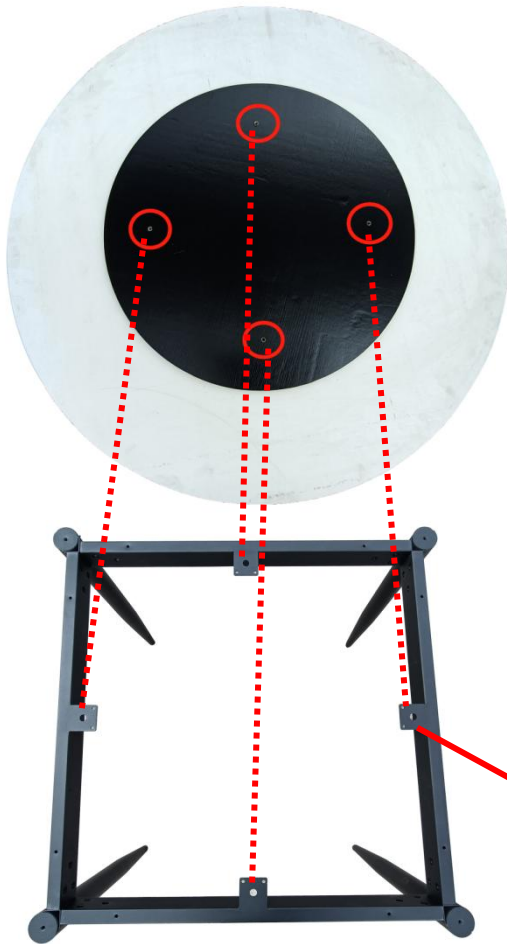


Installation


Hardware List		Hardware List	
 Table top	1	 Table leg	4
 Square beam	4	 8x10mm screw	24
 8x16mm screw and washer	4	 spare 4x15mm Self-tapping screws	8
 Hexagonal screw tap	1		

1		Remove all the screws off the legs.
2		Install the beams with the legs, and then fix it with 8x10mm screws. (Note that the lugs on the beams should face upward)

3



8x16mm screw
and washer



This is a spare screw hole. When the 8x16mm screw fails to be screwed in, the hole can be fixed with a 4x15mm self-tapping screw. Either way will do.

Put the table top on the table leg, make sure the reserved screw holes of the table top and the frame are corresponding, tighten 8x16mm screws from the bottom to finish the installation.



Adjustable foot pads at the bottom of the support legs. (when the ground is uneven, the foot pads can be used to adjust the balance)

