




INSTALLATION INSTRUCTION

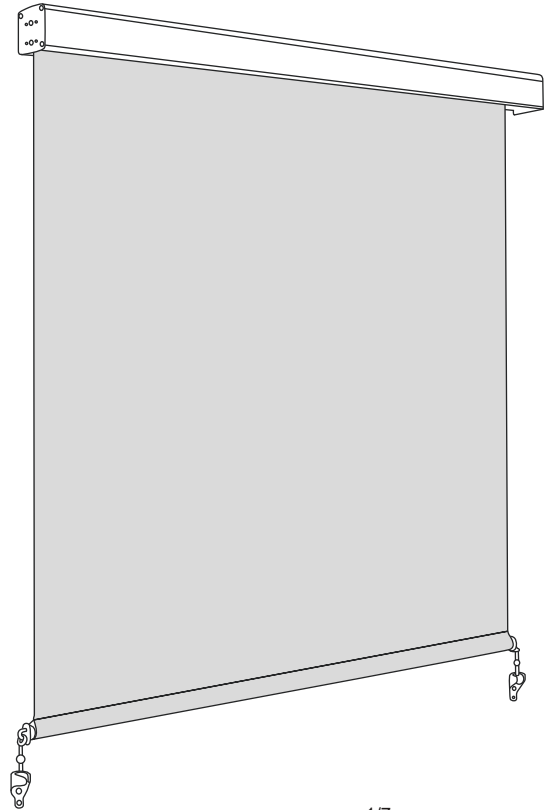


Thanks for your order. Please be sure to read the manual in its entirety before installing your shade.

If you are missing pieces or getting damaged items, just send us your Amazon order ID, Item Picture, Address, and phone number, and we will offer help for you. You will enjoy TWO YEARS WARRANTY after the Date of the Purchase of Vicllax Branded Product.


Please provide your Amazon Order ID so we can check it quickly. Thank you!

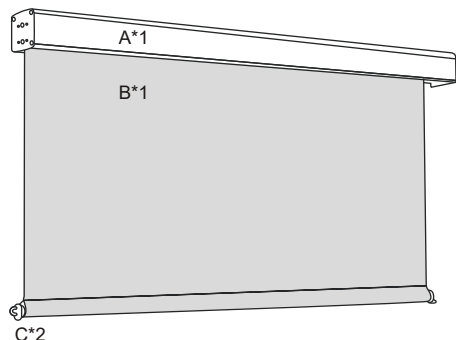

Bungee System (BUN19)*2



Valance Bracket(VB13)*2



Screw (S09)*8

Suggested Tools

Electric screwdriver, leveling device, and power drill.

Installation Mode

The unique pelmet design allows for wall mounting (Fig. 1) or ceiling mounting (Fig. 2) of the blind to suit your installation environment.

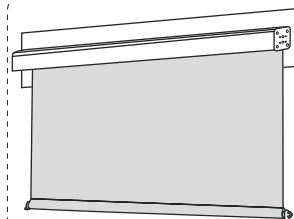


Fig 1-Wall Mount

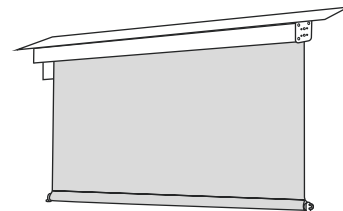


Fig 2-Ceiling Mount

INSTALL QUICK MOUNT BRACKETS

When fitting the brackets make sure they are positioned with the tabs pointing forward (for wall mount-Fig. 3) or downward (for ceiling mount-Fig. 4), to allow easy fitting and removal of the shade.



Fig 3-Wall Mount



Fig 4-Ceiling Mount

NOTE:

1. Install mount brackets, you need to allow 50mm clearance for the attachment of the valance (Fig 5).
2. It is very important to line up all the brackets to ensure proper fitment.

NOTE:

3.All mounting brackets should be installed for optimal support and weight distribution. We recommend an equidistant spacing between the brackets.

Size	Recommended space between brackets	Number of brackets
4'x8'	11" - 57"	2
5'x8'	11" - 57"	2
6'x8'	17" - 33"	2
7'x8'	20" - 39"	3
8'x8'	18" - 30"	3

4. Ensure the Quick Mount Brackets are orientated correctly (Fig 3, Fig 4) then secure into place with Screws.

5. If installing onto masonry, drill a 0.2inch (5mm) hole and insert Wall Plugs.

DO NOT SCREW INTO PLASTER UNLESS YOU ARE USING SCREWS LONG ENOUGH TO FULLY PENETRATE THE TIMBER SUB-FRAME.

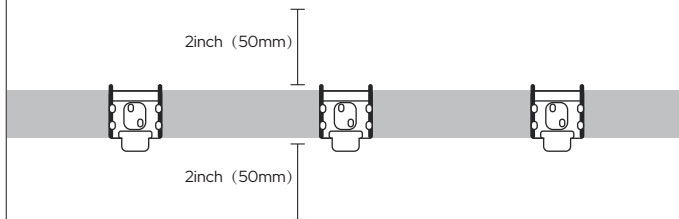


Fig 5

INSTALL PELMET(A)

Install the Valance by locating the tabs on each bracket into the channel on the pelmet and then snapping the housing securely into place.

NOTE: If the brackets have been installed upside down or backward the pelmet will not fit. You may need to push up the spring-loaded plastic tabs on the Valance brackets to help the shade click into place.

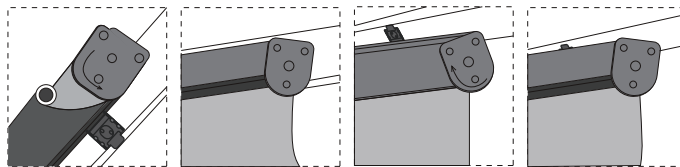


Fig 6-Wall Mount

Fig 7-Wall Mount

Fig 8-Ceiling Mount

Fig 9-Ceiling Mount

INSTALL BUNGEE TIE DOWNS(C)

Bungee tie-downs can be used to help keep your shade steady in mild to moderate wind conditions.

Thread the bungee cord through the Bottom Rail End Cap Rings and back through itself making a Lark's Head Knot (Fig. 11)

Use a drill and the remaining fixings to install the Bungee Receiver (Fig. 13) approximately 5.11inch (130mm) below the bottom of where the shade will stop, to allow for adequate tension in the Bungee Tie Down.

Stretch the bungee tie-downs until they hook over the Bungee Receiver to keep the shade taught in the down position.

Note: Ensure the Bungee tie-downs are released before raising the blind.

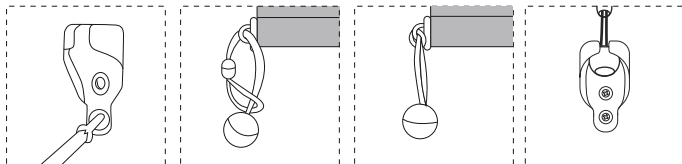



Fig 10

Fig 11

Fig 12

Fig 13


How to Roll It Back?

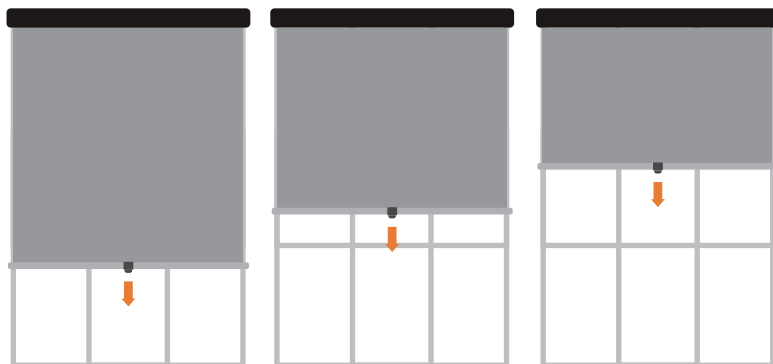

Pull down to stay in any position you need.

Gently put down and release it.

Rebound automatically soundlessly

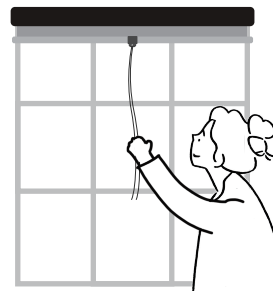

If the shade roller reaches the highest point, you can use the rope provided to pull it down.

MAINTENANCE:

Your Exterior Blind has been made of the finest materials and, when properly cared for, will provide years of shade, privacy, and protection from the elements. To clean your shade, simply rinse with water, scrub with mild soap or any nonabrasive cleaner, rinse, and allow to dry.

Do not store shade wet. In moist areas roll shade down frequently to air dry.

Fully retract the Shade when not in use, or before strong storms to prevent damage.

CAUTION: Use of solvents or abrasive cleaners may damage the fabric and will void your warranty. Do not use bleach or chlorine.



Scan The Code Into **YouTube** for This Product



If you need any help, please contact us via Amazon APP or Email: service@viclax.com. Scan The Code Into **viclax.com** for More Product