



Triton® Bowe® | K-815T70-4AHA

1.5 gpm kitchen sink faucet with 9-5/16" gooseneck spout, aerated flow and lever handles

Features

- Quarter-turn washerless ceramic disc valves
- Vandal resistant aerator.
- Vandal resistant lever handles with red and blue indexing
- 9-5/16" (237 mm) Gooseneck swing spout
- Less drain
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

■ CP Polished Chrome



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-14-2026 11:01 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 9-5/16" (237 mm)

Flow Rate

Faucet Flow Rate: 1.5 gpm (5.7 l/min)

Valves

Included Valves: UltraGlide, Thermostatic Mixer


Material

- Brass
- Brass valve bodies

Recommended Products/Accessories

K-23723 Faucet cleaner



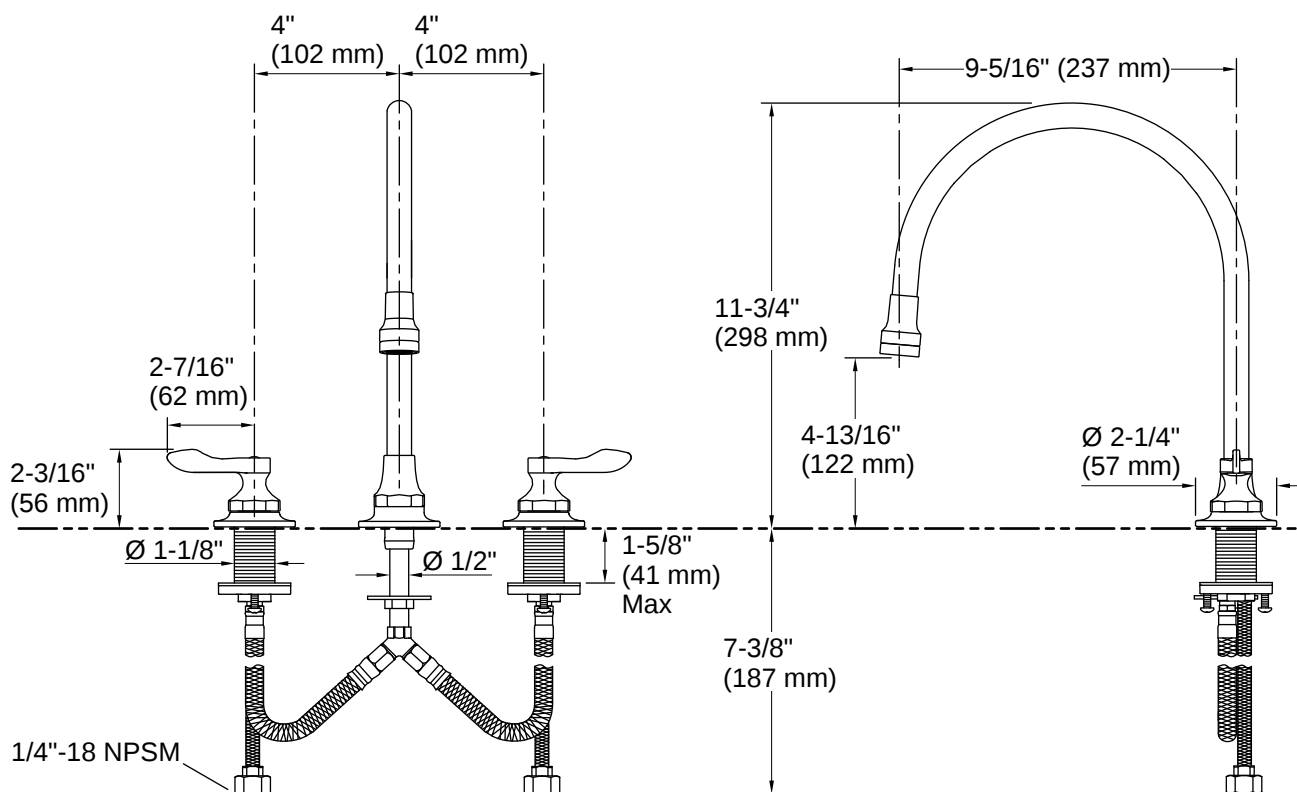

Installation

- For 8" (203 mm) centers

Installation Notes

Install this product according to the installation instructions.

ADA compliant for faucet handles only

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-14-2026 11:01 - US-CA

THE BOLD LOOK
OF **KOHLER**®