

ASSEMBLY INSTRUCTIONS

Nook Bench


ASSEMBLY
REQUIREMENTS:

2-Person
Assembly

30 Minutes
Assembly Time
(Approximate)


Tools Required:
(Not Provided)

Phillips
Screwdriver



Thank you for purchasing our product!

Please refer and use this assembly instruction to assemble the product. Contact our customer service department in case there are any missing or damage parts or hardware. Replacement parts are normally shipped within 2 or 3 days.

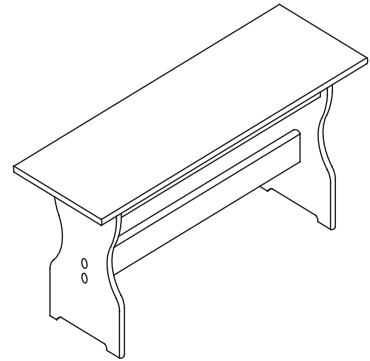

We appreciate your business!

PRODUCTS PURCHASED THROUGH OUR AUTHORIZED VENDORS ONLY ARE ELIGIBLE FOR REPLACEMENT PARTS.
THIS PRODUCT IS FOR INDOOR AND HOUSEHOLD USE ONLY-NOT FOR COMMERCIAL USE.

ASSEMBLY PREPARATION:

1. Remove all packaging materials, staples and packing straps from the carton.
2. Refer to Parts List and Hardware List and ensure they are complete before you start assembling.
3. Place all wooden parts on a clean, flat and soft surface (e.g. carpet or rug) to prevent parts from getting scratched.

SAFETY PRECAUTION:

1. KEEP ALL HARDWARE PARTS OUT OF REACH OF CHILDREN.
2. DISPOSE PLASTIC PACKAGING MATERIAL IMMEDIATELY TO AVOID ANY RISK OF SUFFOCATION TO CHILDREN AND ANIMALS.

TIPS FOR ASSEMBLY:

1. Allow ample room for assembly and in close proximity to where product will be placed.
2. Assemble the product on a surface that does not scratch or damage the exterior gloss and finish of the furniture.
3. Please check all of the parts and quantities are included before assembly. Contact customer service for missing parts.
4. Identify all of the parts, hardware and quantities required for each step.
5. During assembly, do not over-tighten any fittings as this may cause damage.
6. DO NOT USE POWER TOOLS TO ASSEMBLE THIS PRODUCT.
7. Always place the product on a flat surface.
8. Do not sit or stand on the partially assembled product; only use the product for which it is intended.

CARE AND MAINTENANCE


- Wipe clean with a soft, dry cloth; avoid the use of harsh chemicals or household cleaners as they may damage the exterior finish of the furniture.
- Hardware may loosen over time. Periodically, check that all connections are tight; re-tighten as necessary.
- Solid wood is impacted by heat and humidity fluctuations which may cause small joint separations or hairline cracks; place the furniture away from direct sunlight and air conditioning vents, heating vents or units to protect the furniture.

ASSEMBLY INSTRUCTIONS

Nook Bench

Parts List


Part # & Description	Quantity
(1) Bench Seat	1
(2) Bench Leg	2
(3) Seat Rail	2
(4) Leg Stretcher	1

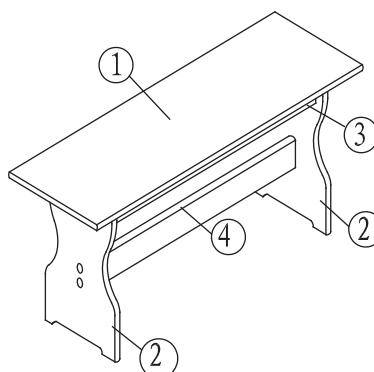

Hardware List


Part # & Description

- (A) Machine Screw (6x50)
- (B) Wood Screw (4x40)
- (C) Barrel Nut
- (D) Wood Dowel (8x30)
- (E) Glue
- (F) Plastic cover
- (G) Foot pad

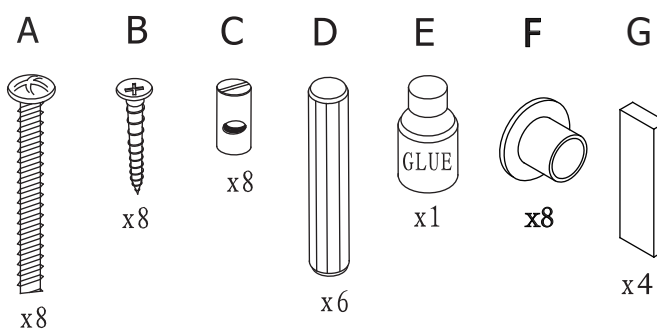

Instructions For Installing Barrel Nut

Insert Barrel Nut with the perpendicular hole facing and in-line with the drill hole that the bolt is to be inserted.

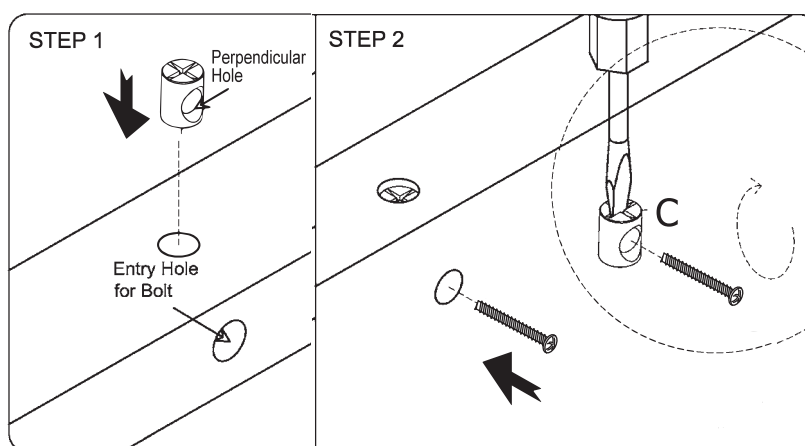


Use a Flat-head Screwdriver to hold Barrel Nut in position before inserting bolt to thread into the Barrel Nut.


ASSEMBLY INSTRUCTIONS

Nook Bench

STEP 1

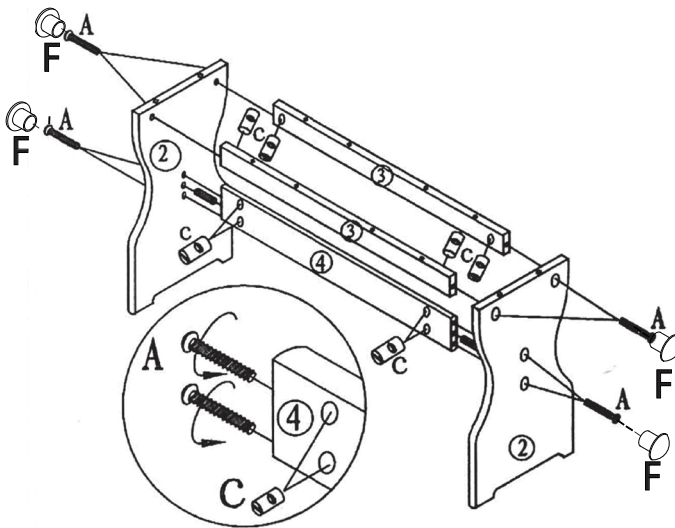

STEP 2

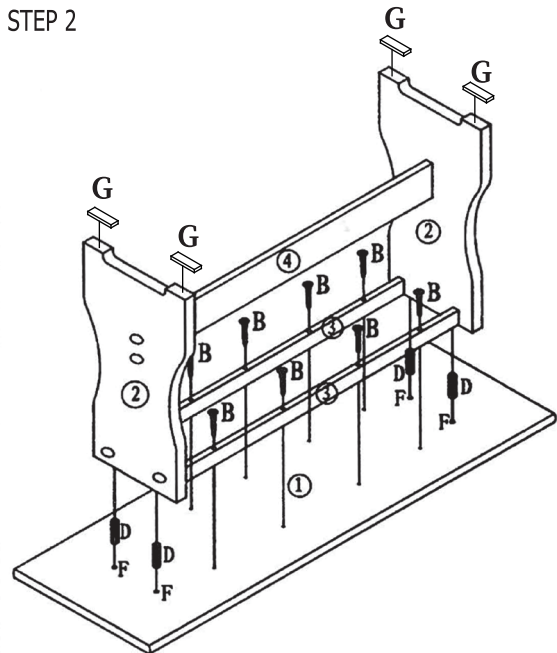

Note: For the purpose of showing the parts and hardware used in STEP 1, the drawing shows the bench in an upright position. It is easier to assemble the bench lying on its side.

- a) Lay out Seat Support Rail (3), Leg Stretcher (4) and Bench Leg (2) on a flat surface that does not scratch or damage the product.
 - b) Insert Wood Dowel (D) to the designated holes (holes without access for Barrel Nuts) on (4).
 - c) Attach (3) & (4) to right Bench Leg (2). Insert Barrel Nut (C) into the respective holes on (3) & (4). Insert Machine Screw (A) through (2) to screw into Barrel Nut. Do not tighten (A) completely at this time.
 - d) Attach left Bench Leg to Leg Stretcher (4) via Wood Dowel on (4) as shown.
 - e) Insert Barrel Nut (C) into the respective holes on (3) & (4). Insert Machine Screw (A) through (2) to screw into Barrel Nut. Do not tighten (A) completely at this time.
 - f) Tighten all of the Machine Screws (A) when all of the Screws (A) are in place.
 - g) Insert Plastic Cover (F) to cover the Screw hole
- a) Place Bench Seat (1) bottom-side up as shown and identify all of the pilot holes.
 - b) Locate the holes for Wood Dowels and insert Wood Dowel (D)
 - c) Position the bench leg assembly from STEP 1 to fit Wood Dowels on (1) into the holes on Bench Legs.
 - d) Align screw holes on (3) to pilot holes on (2) and use Screw (B) to fasten (1) to (3). Do not tighten Screw (B) completely until all of the screws are in place.
 - e) Paste foot pad (G) as shown
 - f) The assembly of the bench is completed.