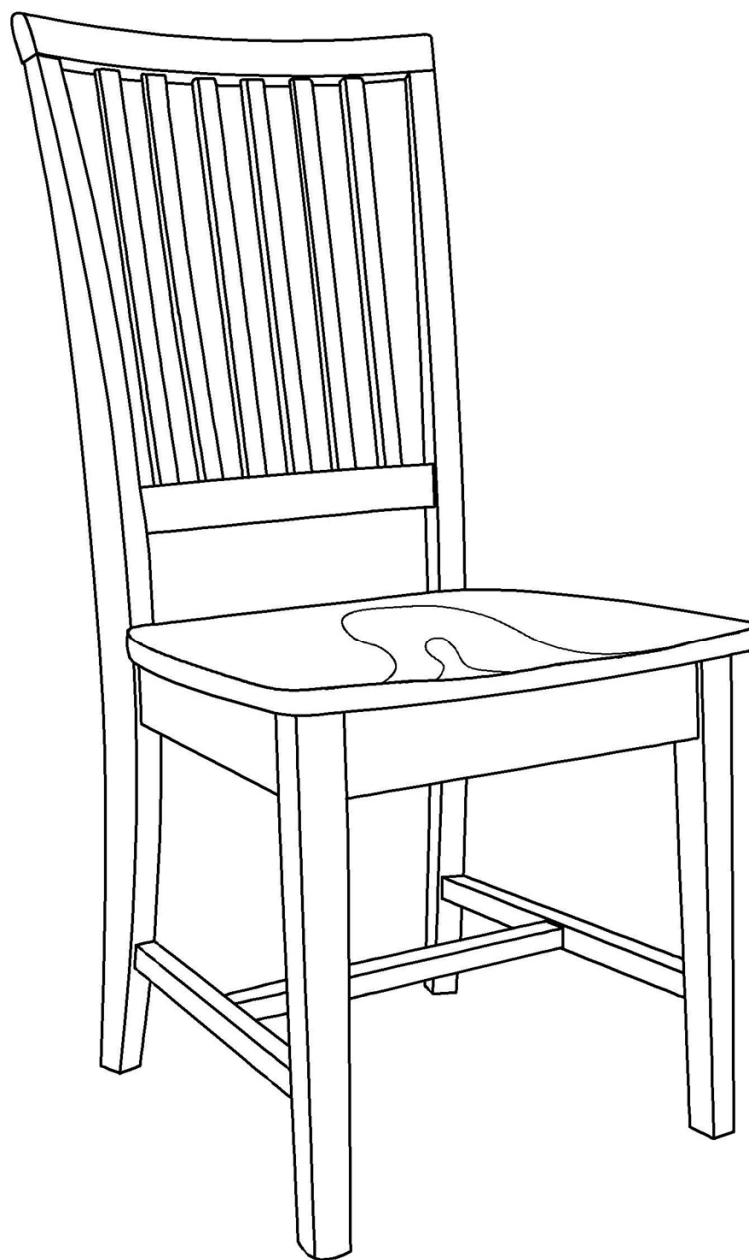


ASSEMBLY INSTRUCTIONS



IMPORTANT NOTE:







- Place all wooden parts on a clean and smooth surface such as a rug or carpet to avoid the parts from being scratched.
- Remove all wrapping material, including staples & packing straps before you start to assemble.
- DO NOT tighten all screws and bolts until completely assembled.
- Keep all hardware parts out of reach of children.

ASSEMBLY TOOLS REQUIRED

NOT INCLUDED

**PART LIST**

When unpacking, please be careful not to discard any parts with the packaging. Before continuing, please make sure you have the following parts:

NO	Description	Qty	Sketch	NO	Description	Qty	Sketch
A	Chair back	1		B	Seat Frame	1	
C	Middle stretcher	1		D	Side Stretcher (L-R)	2	
E	Front Leg (L-R)	2		F	Seat	1	

HARDWARE LIST


When unpacking, please be careful not to discard any parts with the packaging. Before continuing, please make sure you have all of the following hardware:

NO	Description	Qty	Sketch	NO	Description	Qty	Sketch
1	Short bolt (M6x40mm)	3		2	Medium bolt (M6x60mm)	4	
3	Long bolt (M6x80mm)	4		4	Flat Washer (Φ6.5x Φ19mm)	11	
5	Short screw (M3.5x15mm)	2		6	Long screw (M4x35mm)	8	
7	Allen Key (4mm)	1		8	Lock Washer (Φ6.5x Φ11mm)	11	

STEP 1


Attach seat frame (B) to Back (A) by using bolts (3) and (1), and washers (4) and (8).

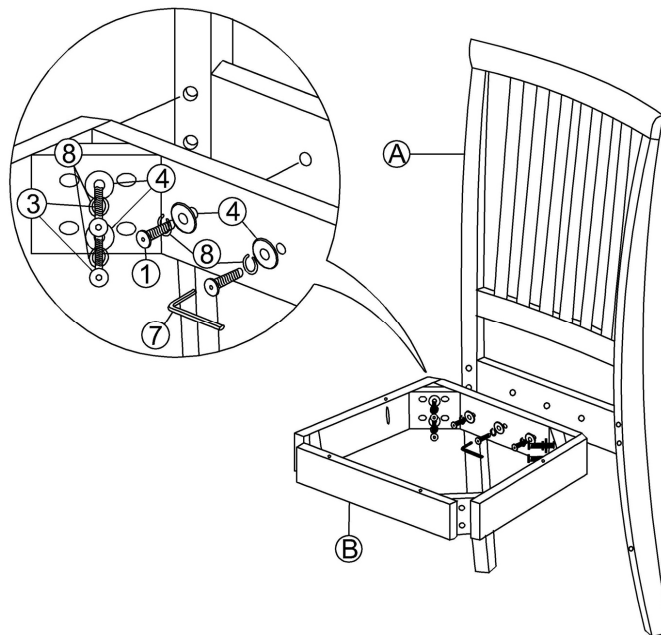Note: DO NOT tighten any of the bolts, until the chair is fully assembled. Put the chair on a flat level surface, make sure the chair is level and tighten with allen key (7) as shown below.



STEP 2

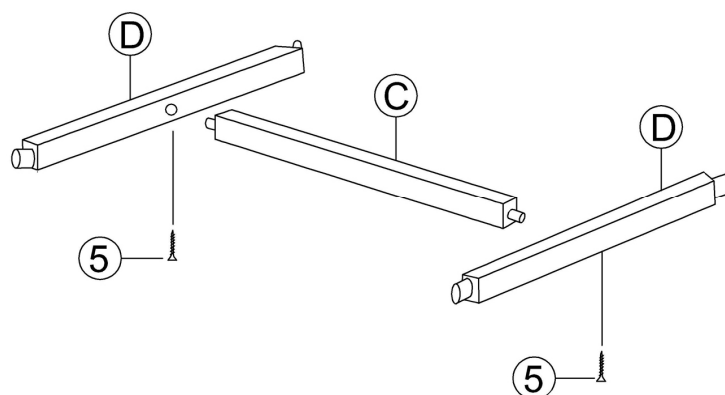
Attach middle stretcher (C) to side stretchers (D) with short screws (5). Tighten with a screwdriver.



STEP 3

Attach front legs (E) to the seat frame with bolts (2) and washers (4) and (8). Tighten with allen key (7).

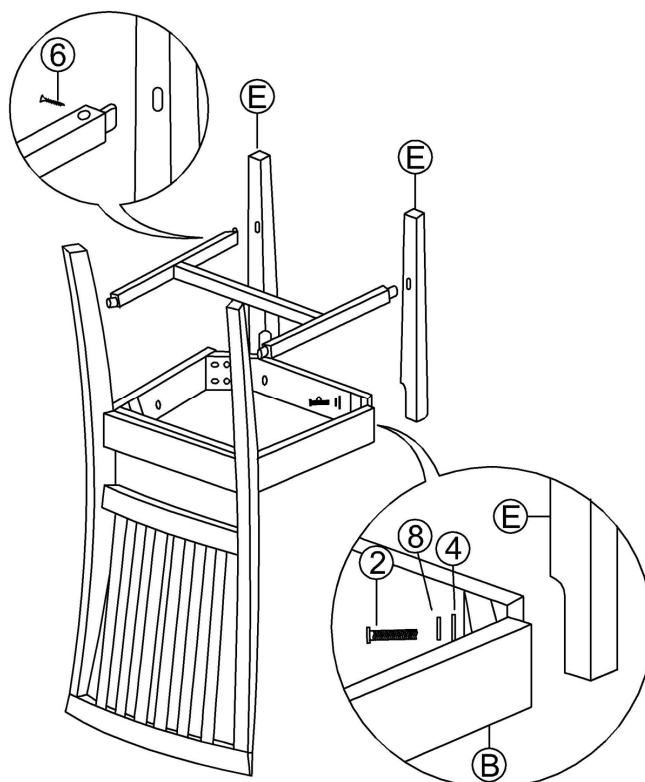Place side stretchers (D) between front and back legs, use the screwdriver to tighten the screws (6) as shown below.



STEP 4

Attach seat (F) to top of the seat frame (B) by using screws (6). Tighten with a screwdriver.

