


OBVI™

FP3050**

26" Ceiling Fan

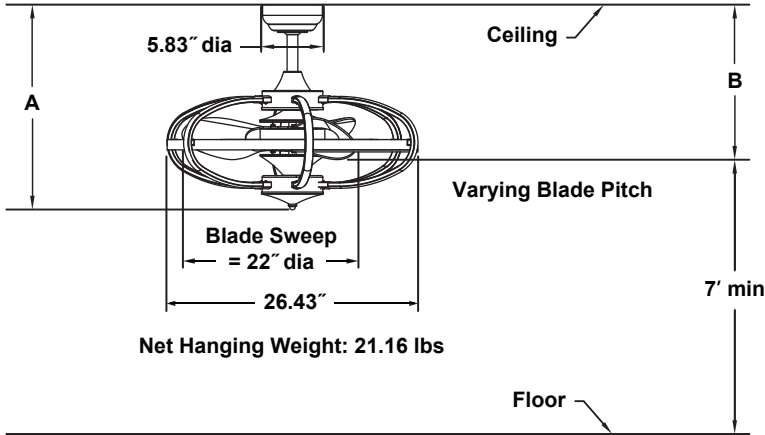

	A	B
Fan w/6" downrod	19.80"	14.91"
Fan w/12" downrod	25.80"	20.91"
Fan w/18" downrod	31.80"	26.91"
Fan w/24" downrod	37.80"	32.91"
Fan w/36" downrod	49.80"	44.91"
Fan w/48" downrod	61.80"	56.91"
Fan w/60" downrod	73.80"	68.91"
Fan w/72" downrod	85.80"	80.91"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 12 sensorless DC motor is designed for optimal performance with this fan.

CONTROL OPTIONS:

TR205D hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control is available — sold separately. Instructions are provide with each control.

LIGHTING OPTIONS:

Six 4-watt Arm LED and
Four 6-watt Center Band LED included.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 6" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only. This fan is for room up to 100 sq ft.

Available Finishes

BL	Black with Clear Blade
BN	Brushed Nickel with Clear Blade

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	382	1516	58	0.42	26
Med	356	1422	66	0.34	22
Low	210	757	109	0.12	7

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
19	1177	5	62

Light Bulb Information (120V) - Arm LED

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	4	6	2580	3000	90%

Light Bulb Information (120V) - Center Band LED

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	6	4	1370	3000	90%