



Assembly Instructions

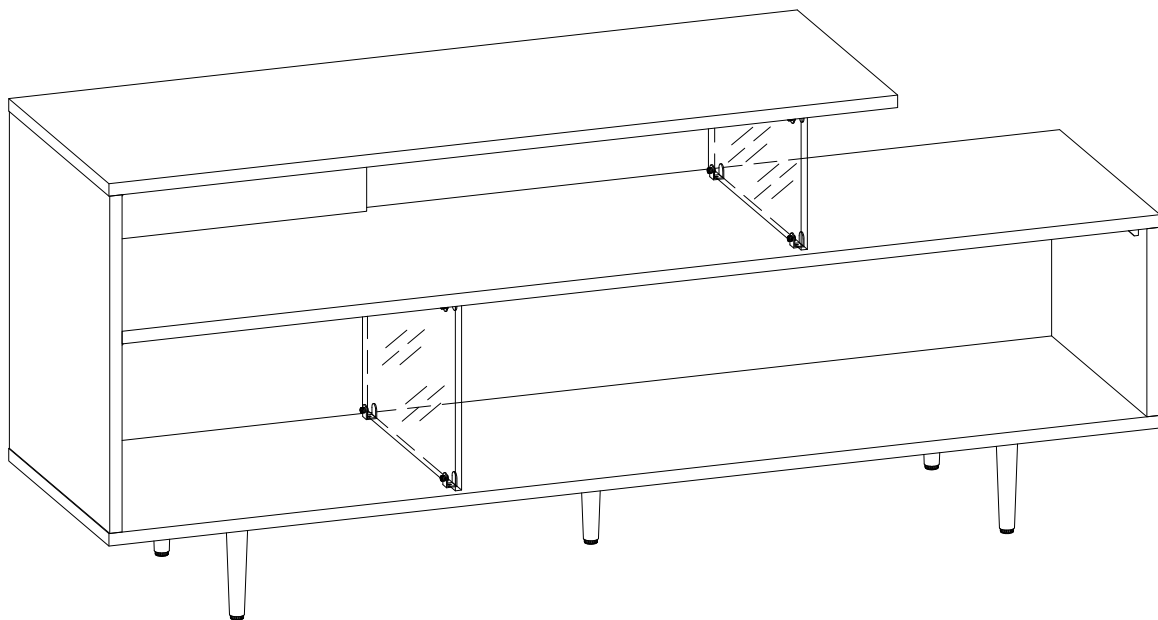


Please visit our website for the most current instructions, assembly tips, report damage, or request parts.

General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are : wood dowels , screws and bolts.
- V. The provided glue is to secure wood dowels in place . When first inserting dowels , locate the appropriate hole for the dowel , place a small amount of glue in the hole and insert the dowel . Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together , place a small amount of glue on the end of the dowel before attaching parts together . Wipe away excess glue immediately.




- VI. A Phillips head screwdriver is required for the assembly of this product .





- VII. Power tools should not be used to assemble this product .




Parts List

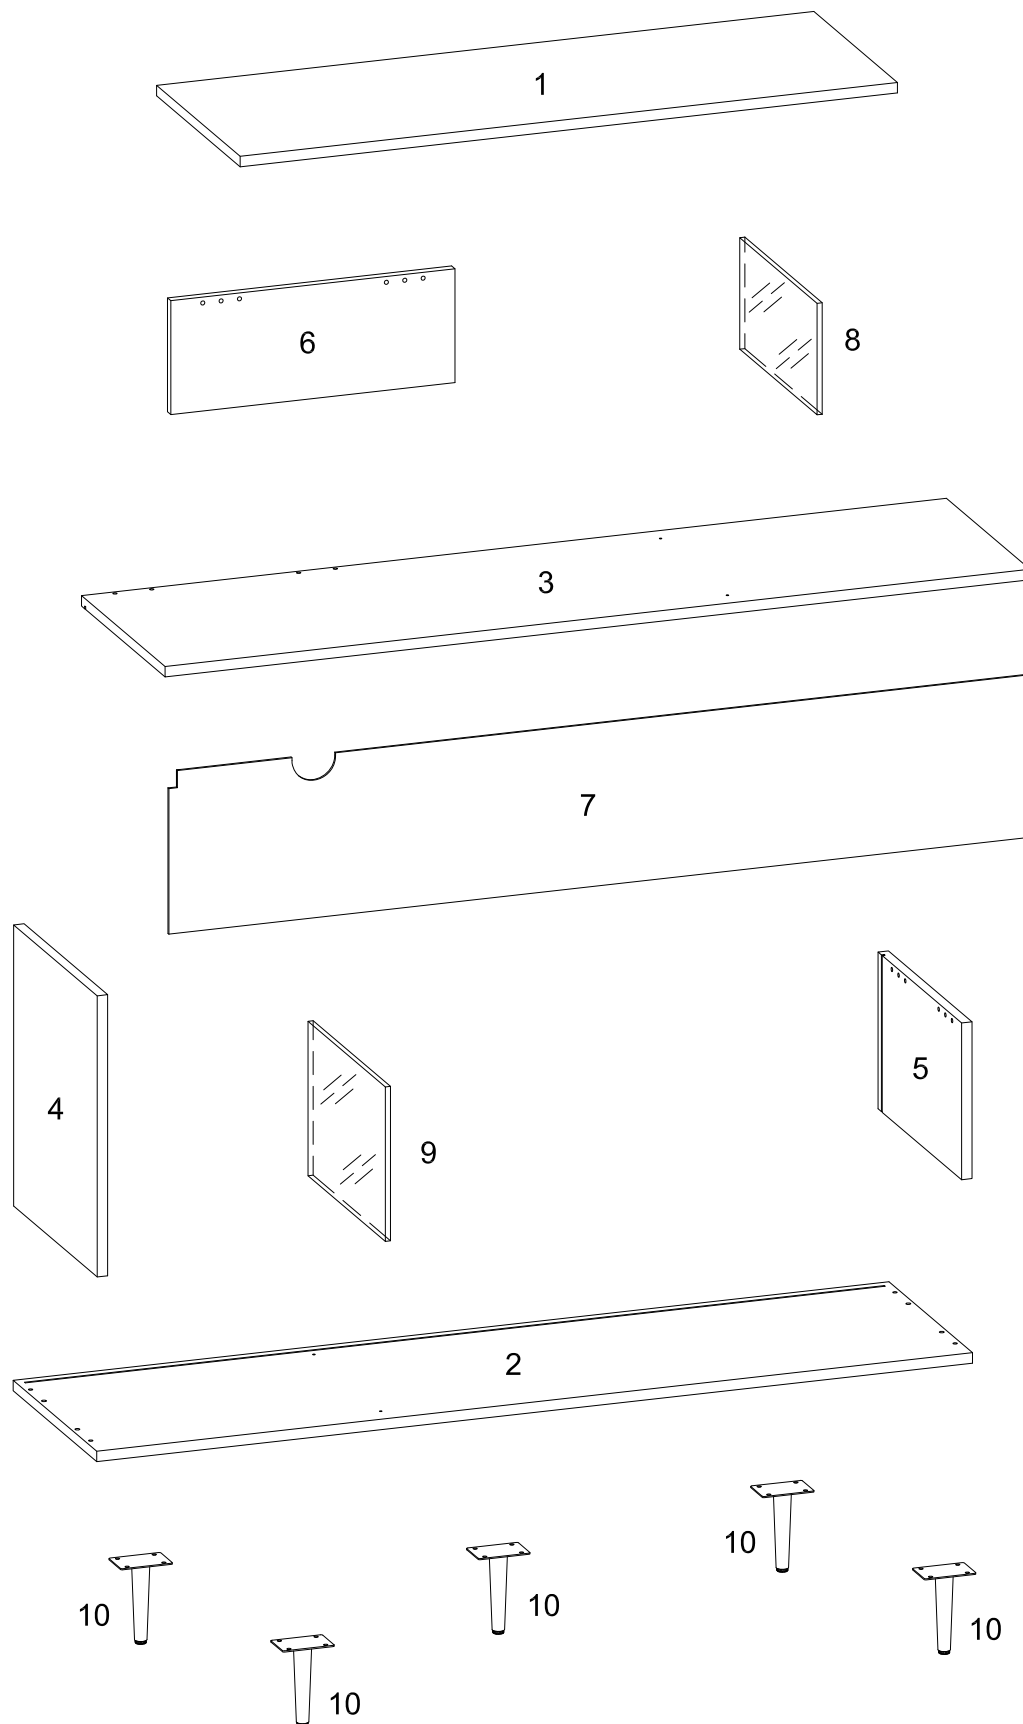

Hardware List


A		Ø8x30mm	Wooden dowel	6 pcs
B		Ø6x50mm	Screw	6 pcs
C			Plastic wedge	8 pcs
D		Ø6x12mm	Bolt	44 pcs
E		M 4	Hex Key	1 pc
F			Glass holder	8 pcs
G		Ø3x17mm	Screw	6 pcs
H			Plastic wedge	6 pcs
J		Ø3x15mm	Screw	8 pcs
K			Glue tube	1 pc



Philips head screwdriver required for assembly
(not included)


*The hardware quantities listed above are required for proper assembly.
Some extra hardware may also have been included.*

Step 1

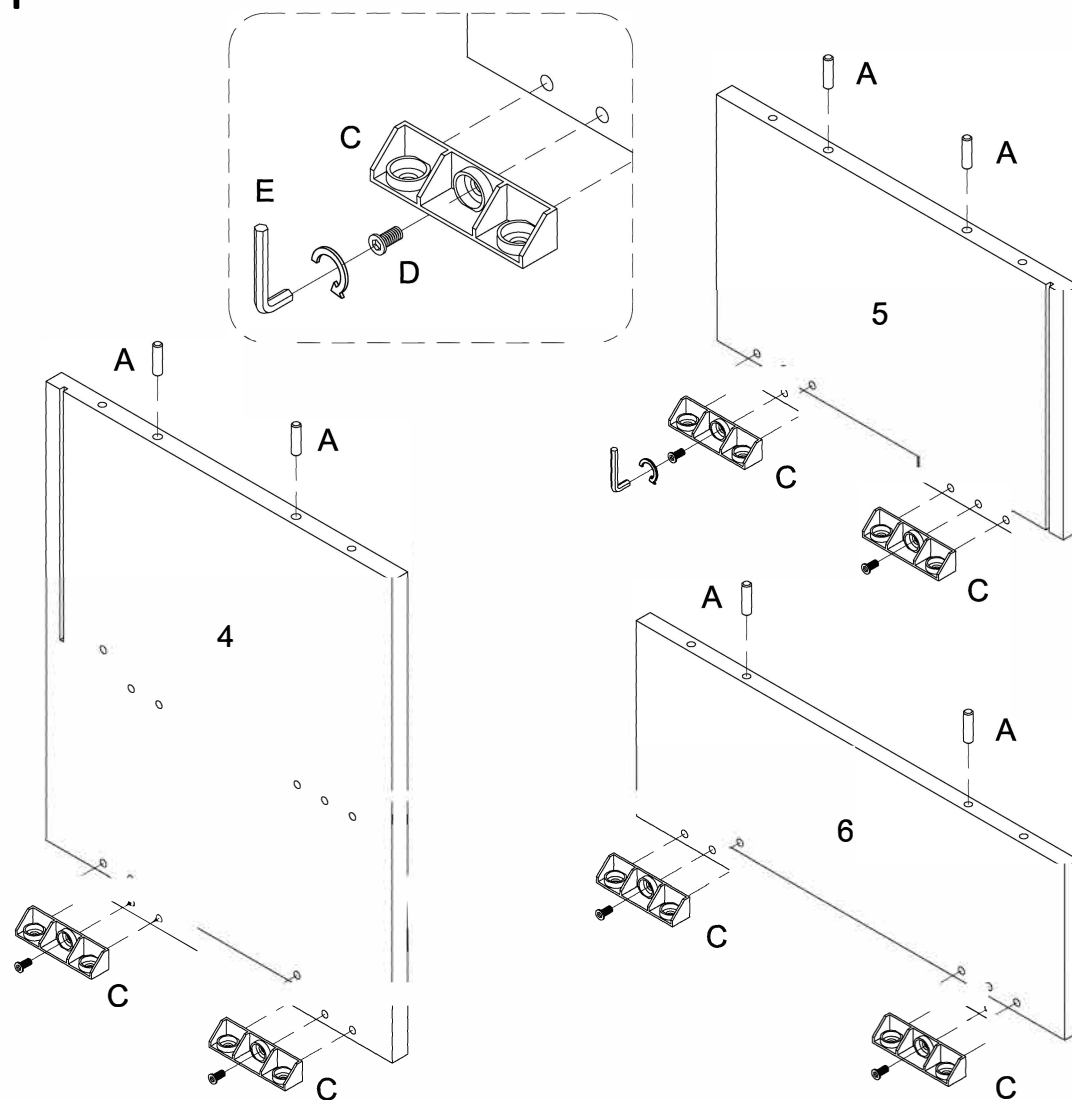


Insert wooden dowel (A) into part (4, 5, 6), attach plastic wedge (C) to part (4, 5, 6) using bolt (D) with hex key (E) as per diagram.

Step 2

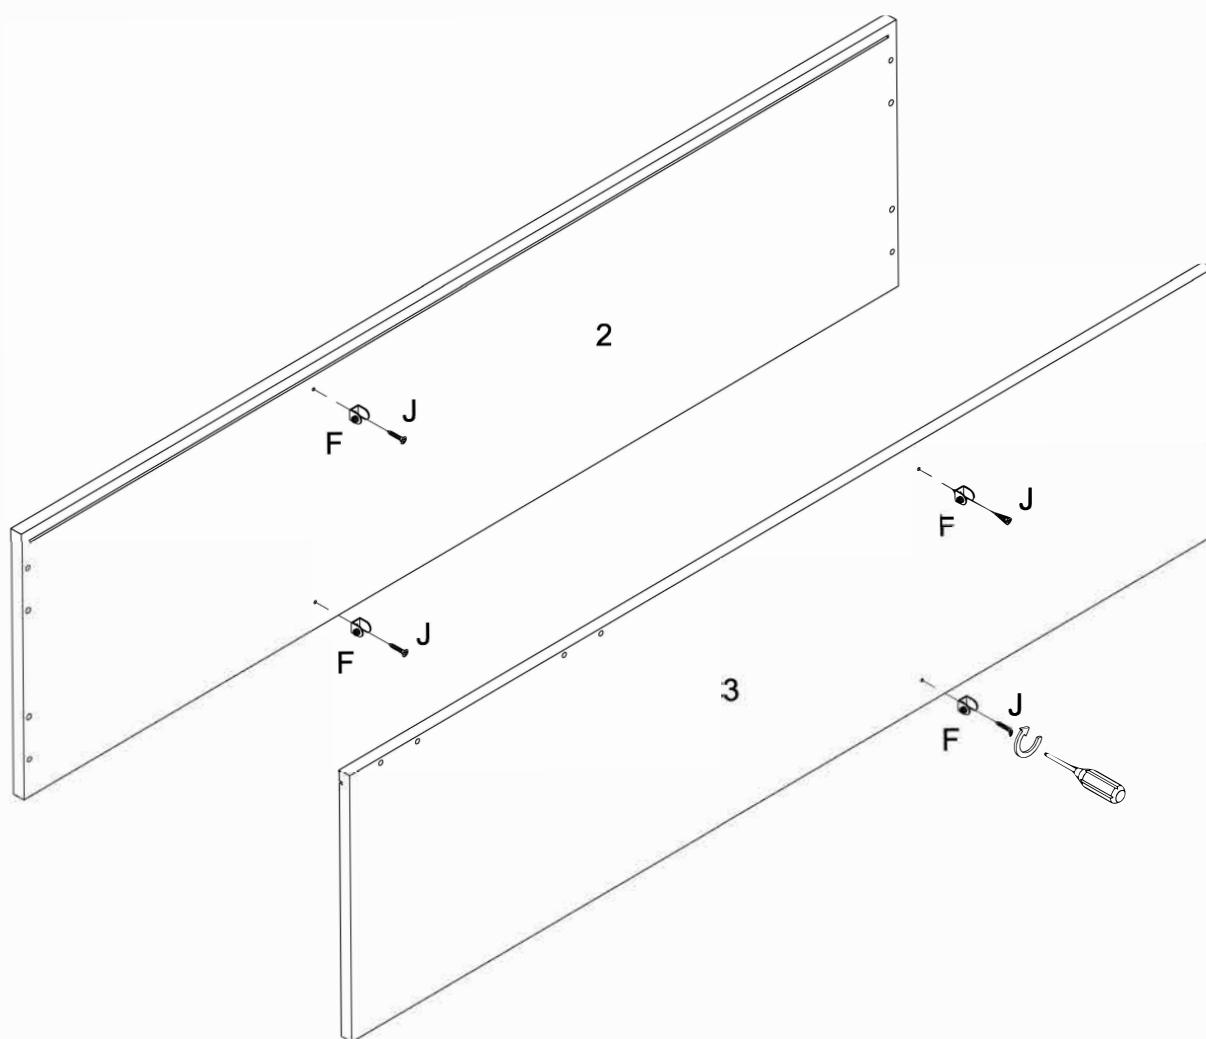


Attach glass holder (F) to part (2, 3) using screw (J) with Philips head screwdriver.

Step 3

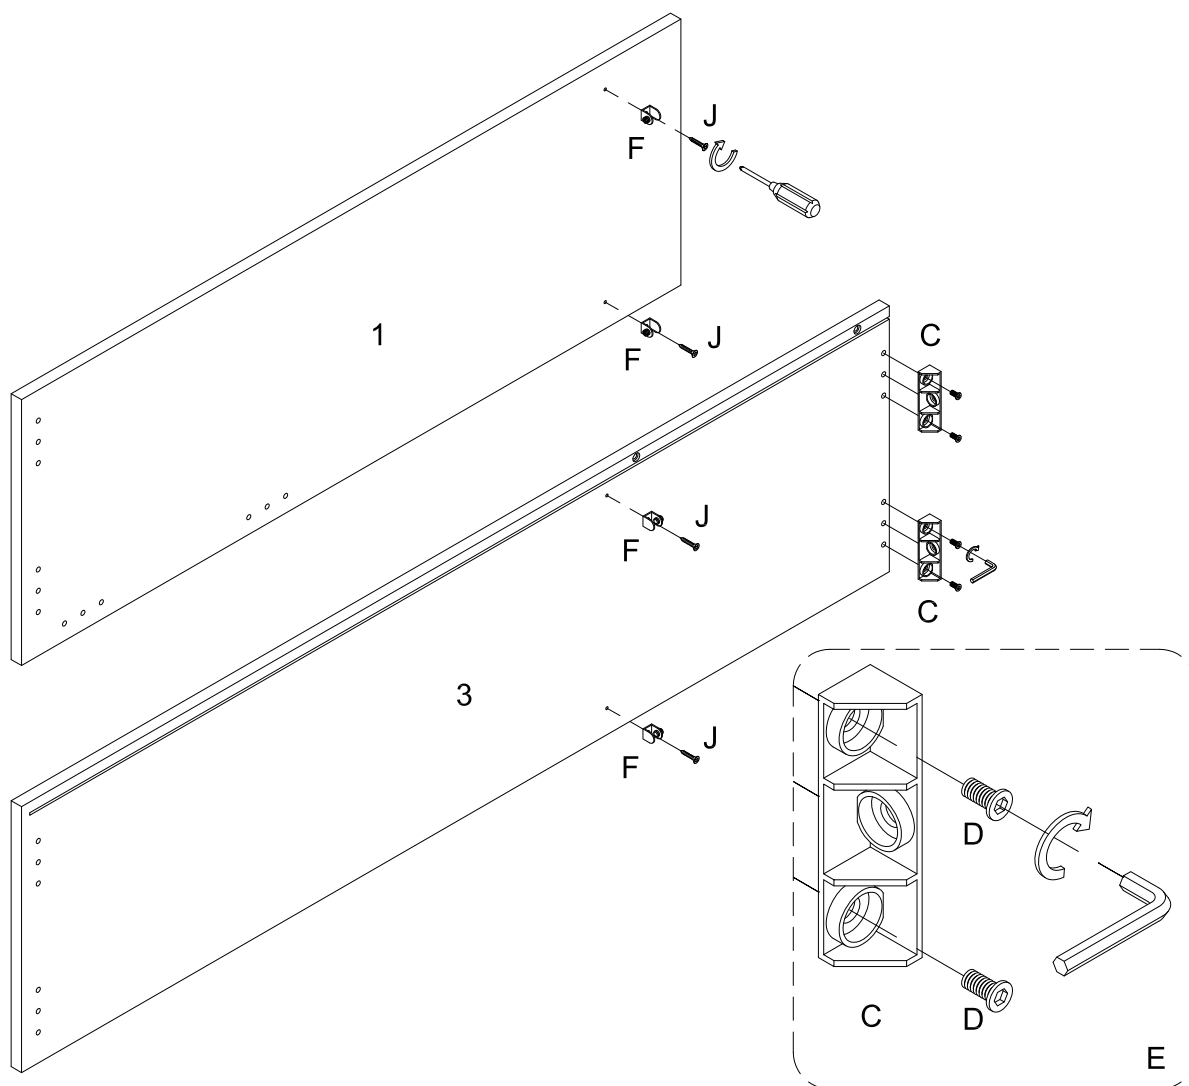


Attach glass holder (F) to part (1, 3) using screw (J) with Philips head screwdriver. Attach plastic wedge (C) to part (3) using bolt (D) with hex key (E) as per diagram.

Step 4

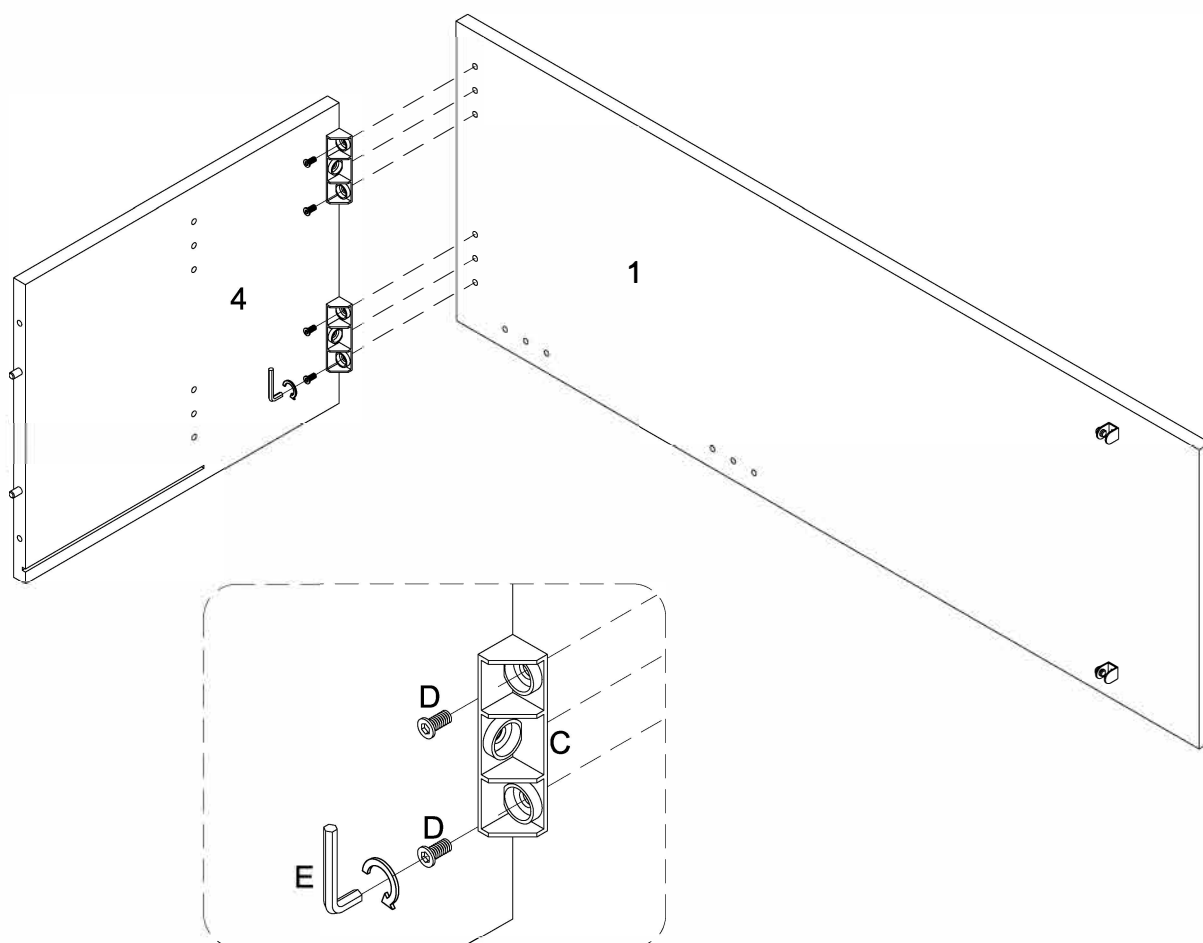


Attach part (4) to part (1) using plastic wedge (C) and bolt (D) with hex key (E) as per diagram.

Step 5

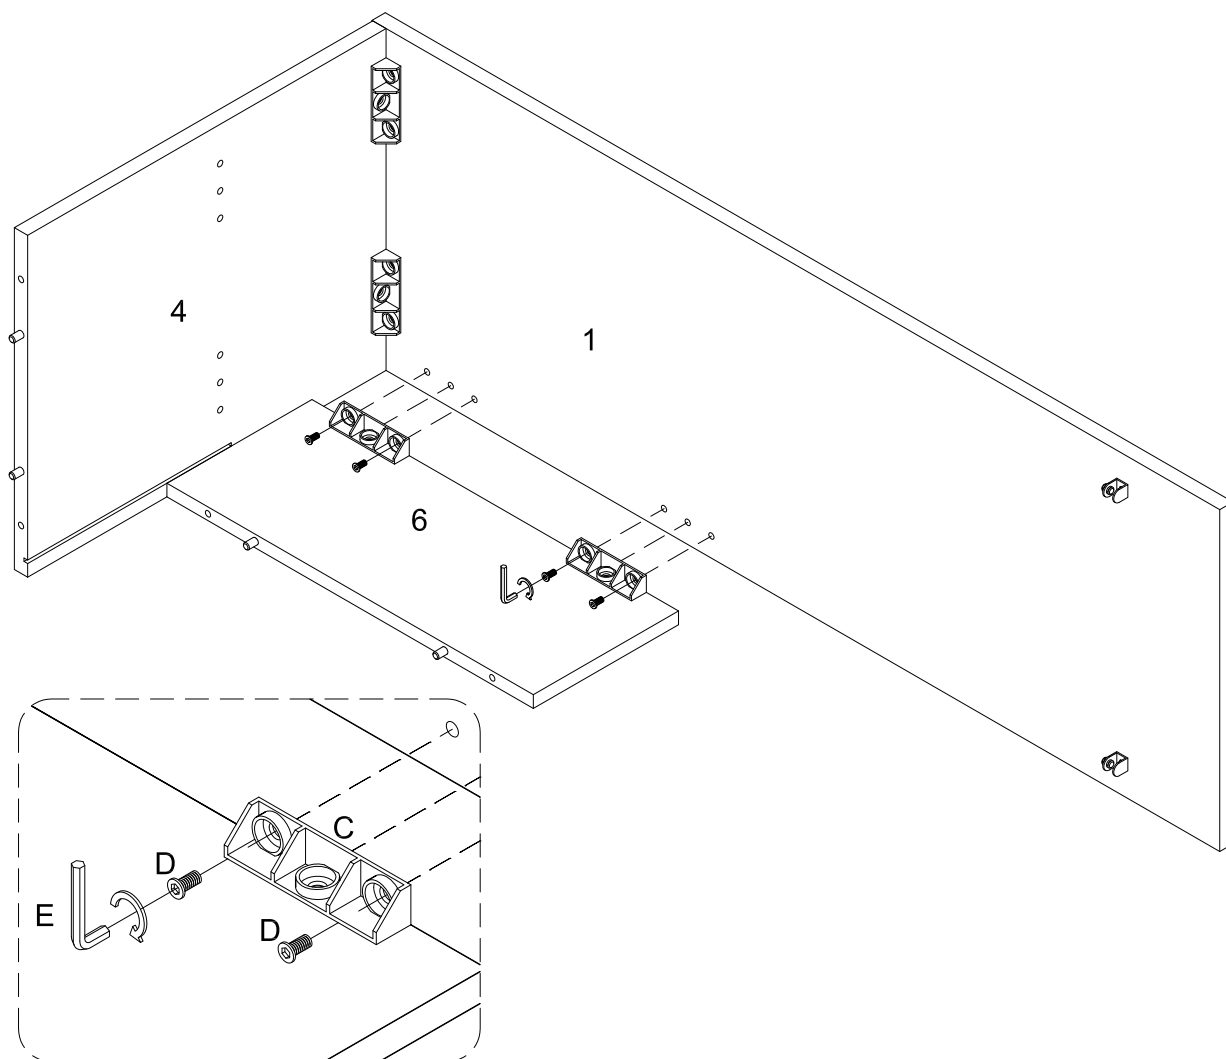


Attach part (6) to part (1) using plastic wedge (C) and bolt (D) with hex key (E) as per diagram.

Step 6

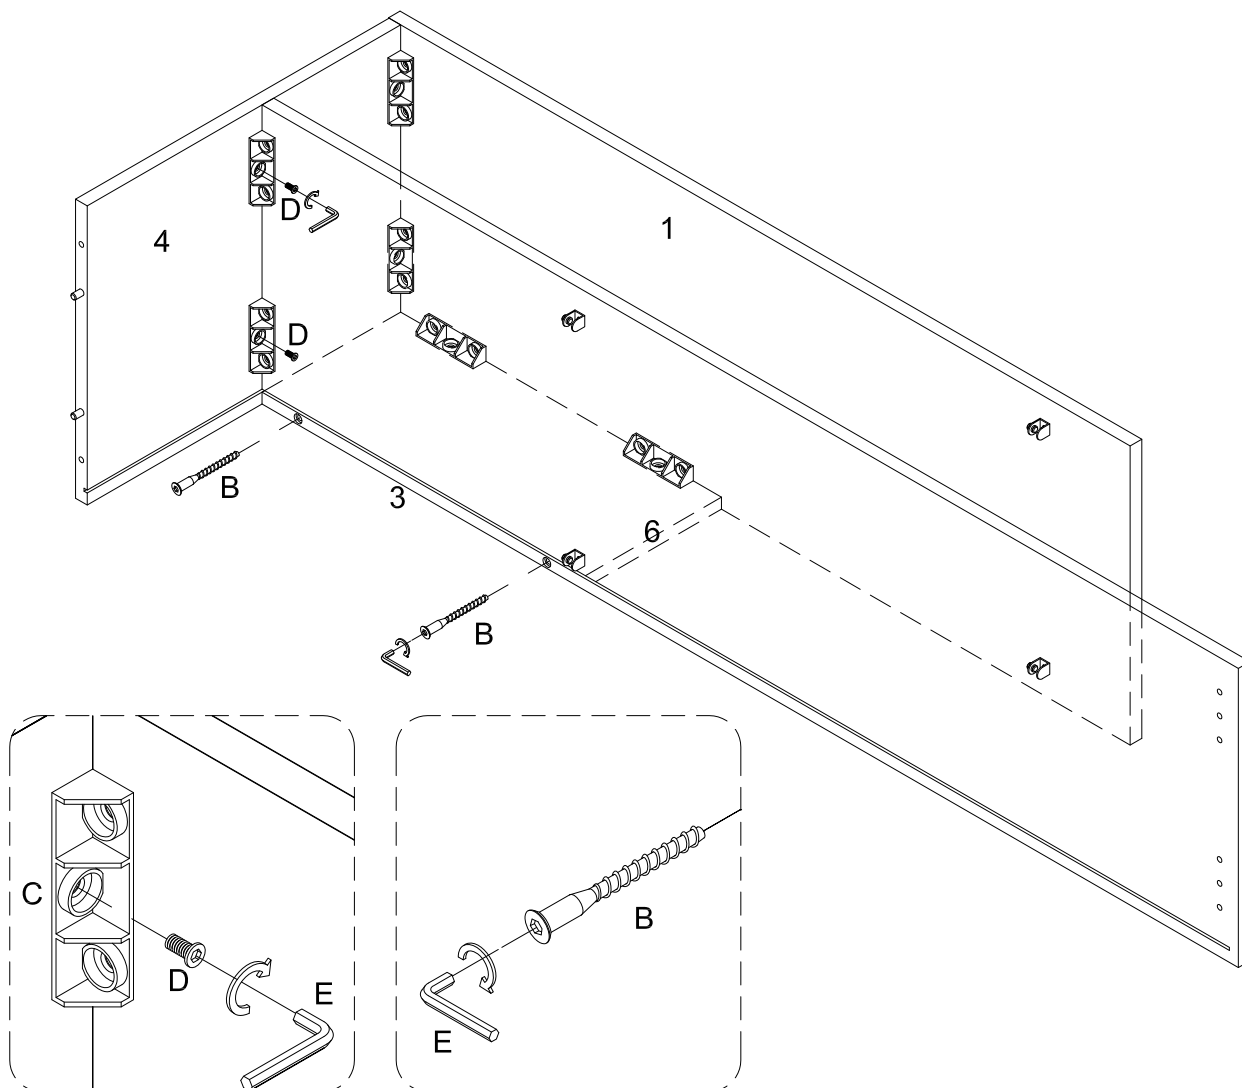


Attach part (3) to part (4) using plastic wedge (C) and bolt (D) with hex key (E) as per diagram. Attach part (3) to part (6) using screw (B) with hex key (E) as per diagram.

Step 7

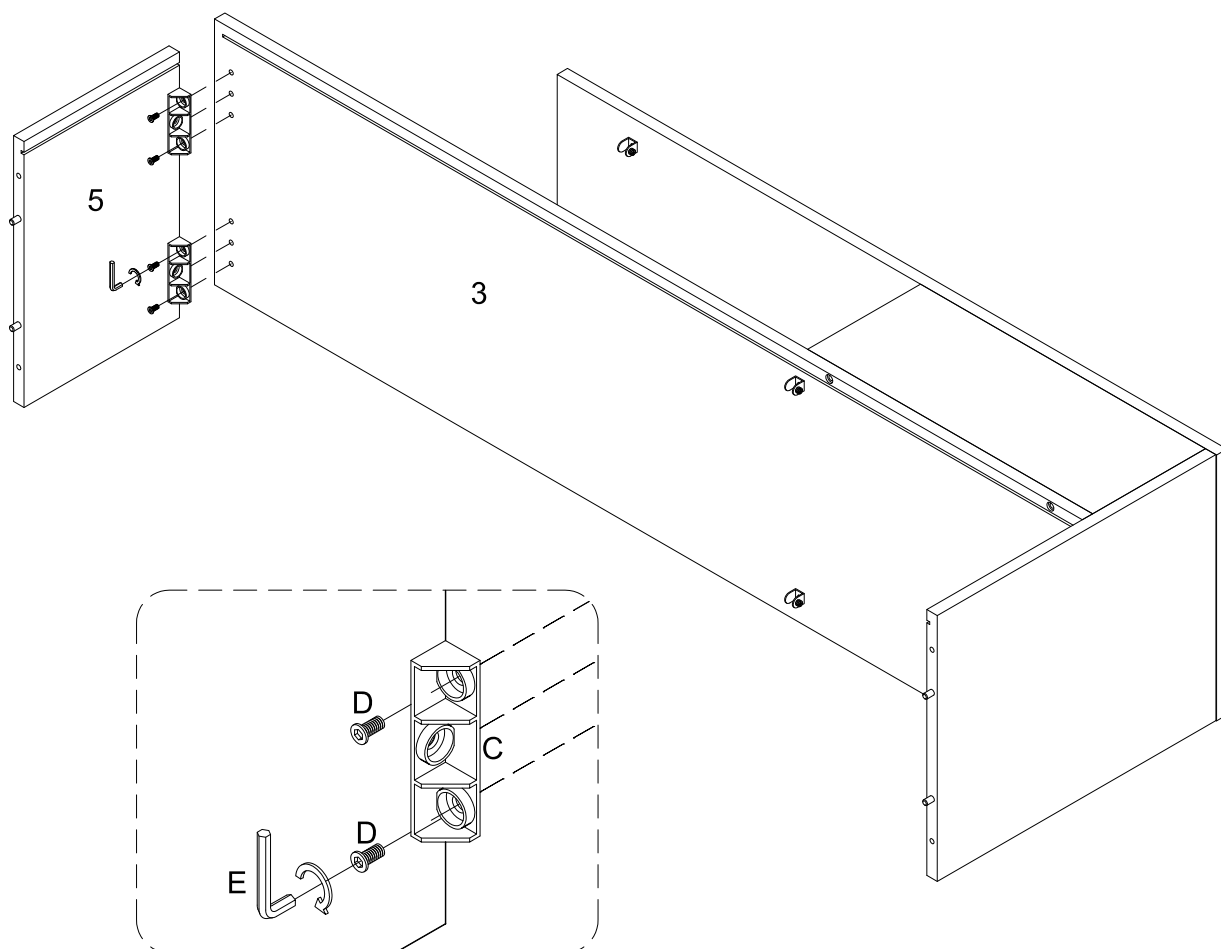


Attach part (5) to part (3) using plastic wedge (C) and bolt (D) with hex key (E) as per diagram.

Step 8

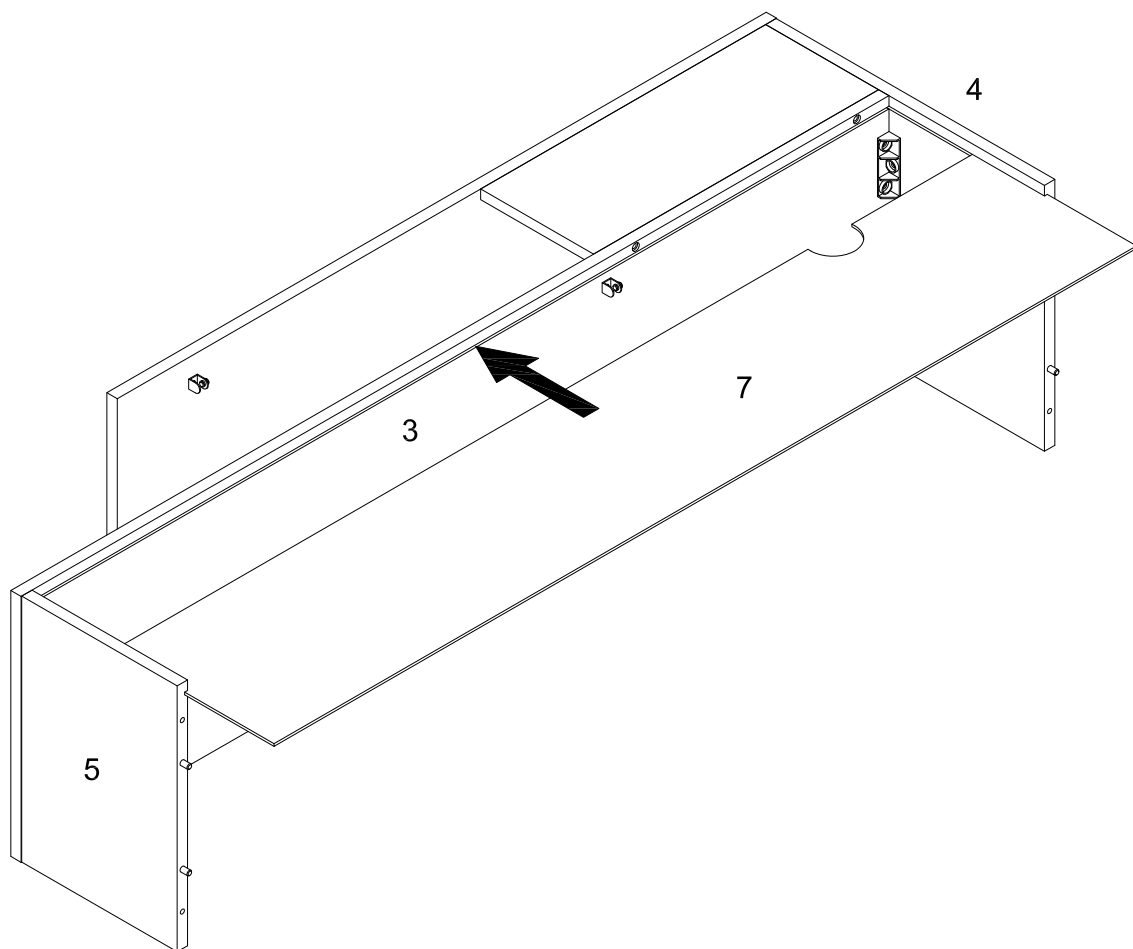


Slide part (7) into grooves as per diagram.

Step 9

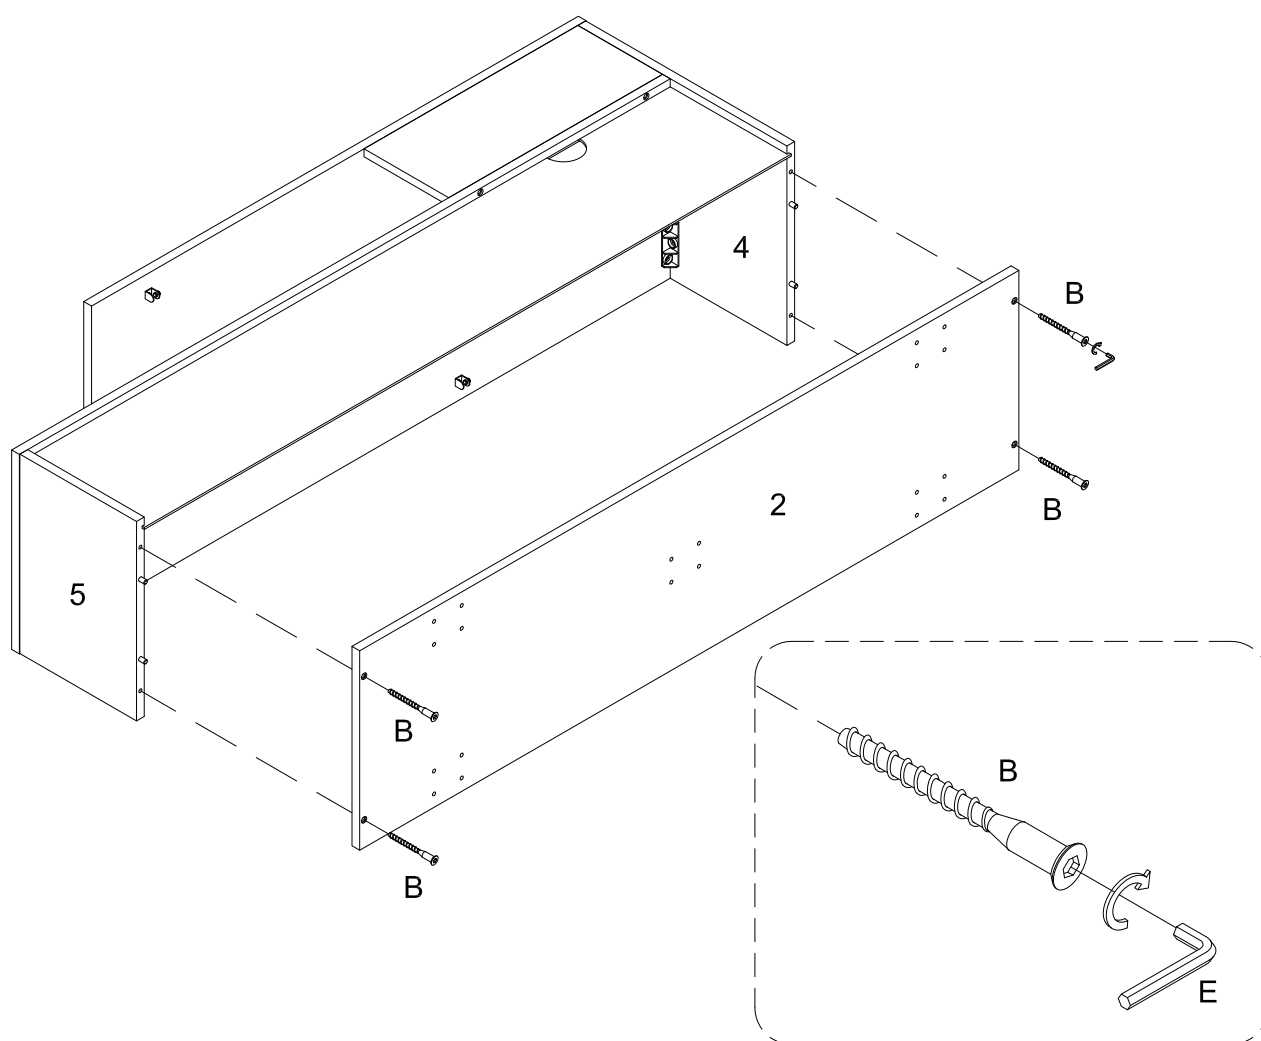




Attach part (2) to part (5, 4) using screw (B) with hex key (E) as per diagram.

Step 10

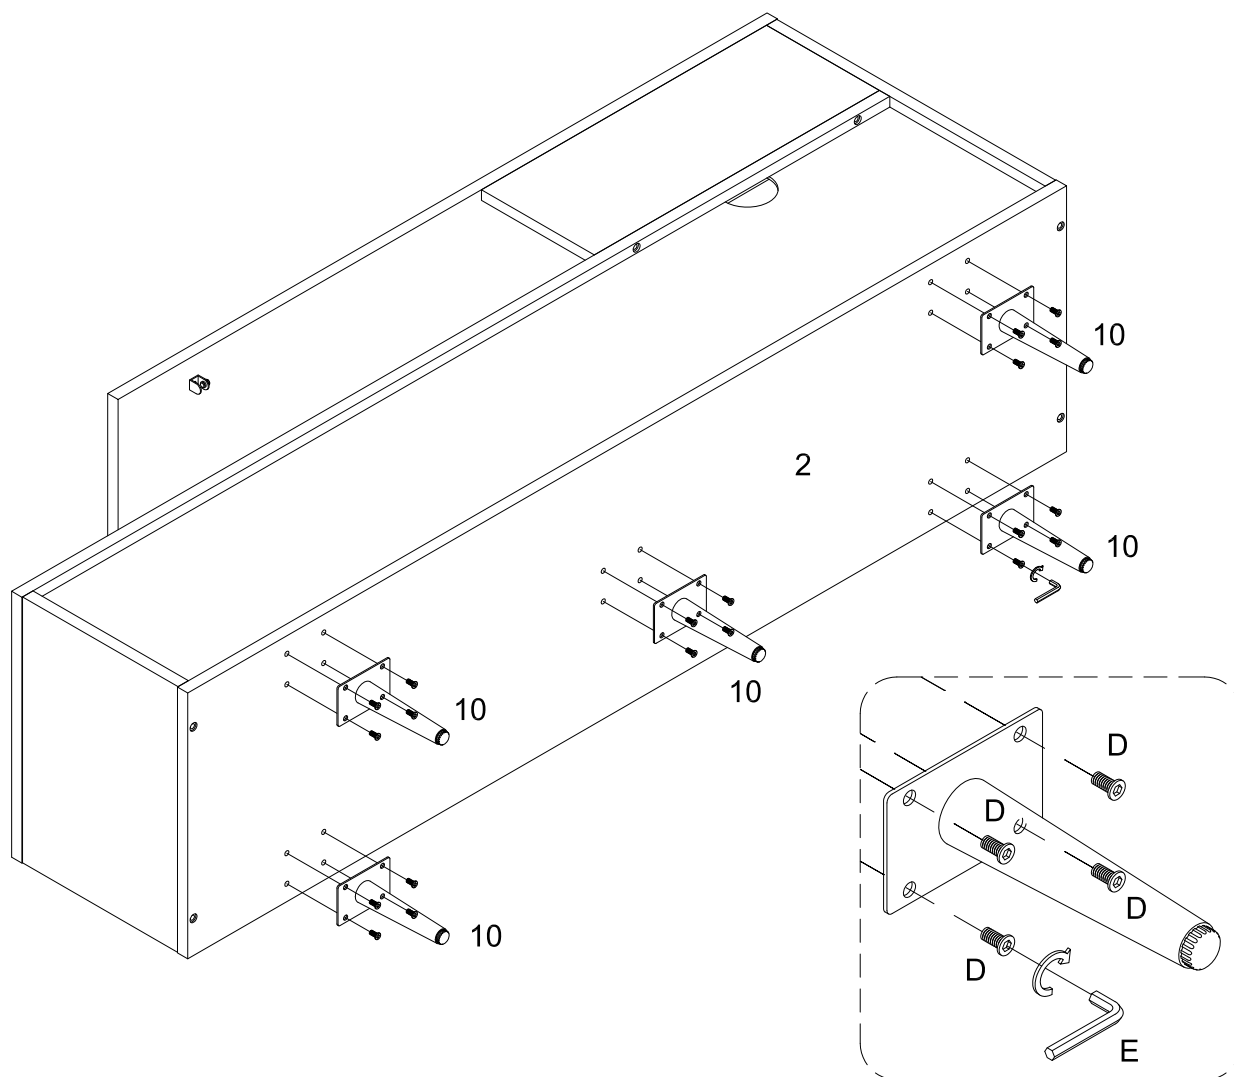





Attach part (10) to part (2) using bolt (D) with hex key (E) as per diagram.

Step 11

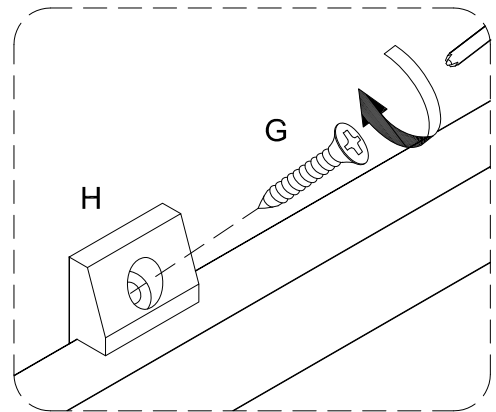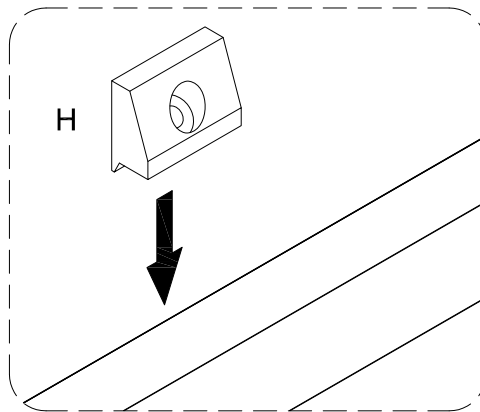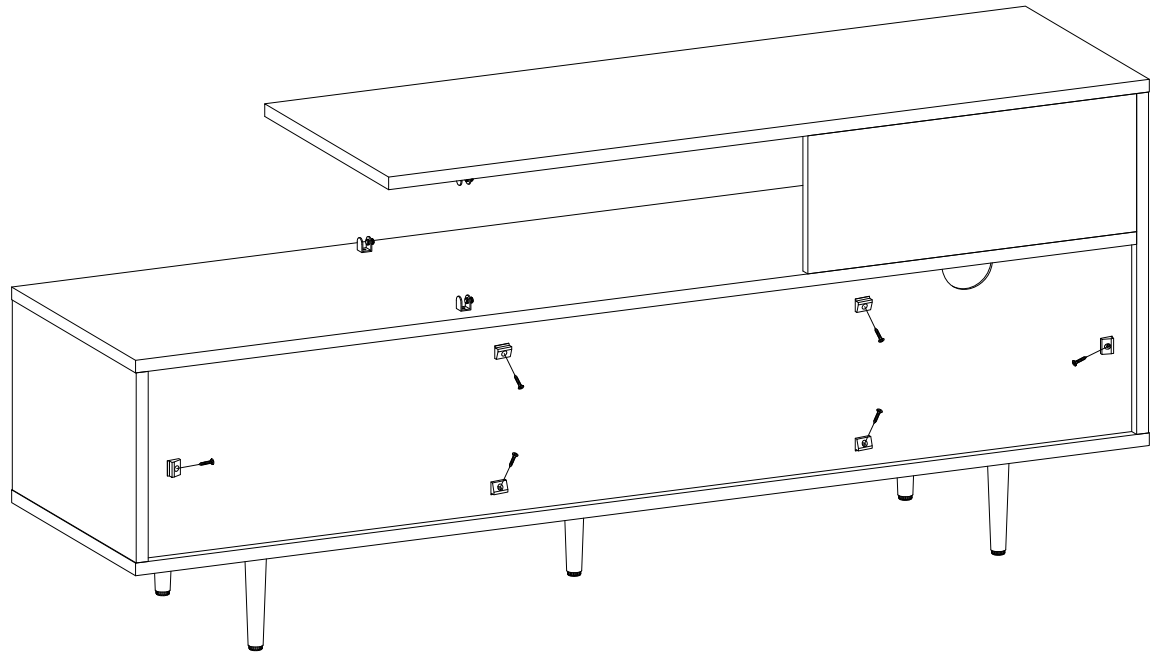


Secure plastic wedge (H) to back panel using screw (G) with Philips head screwdriver.

Step 12

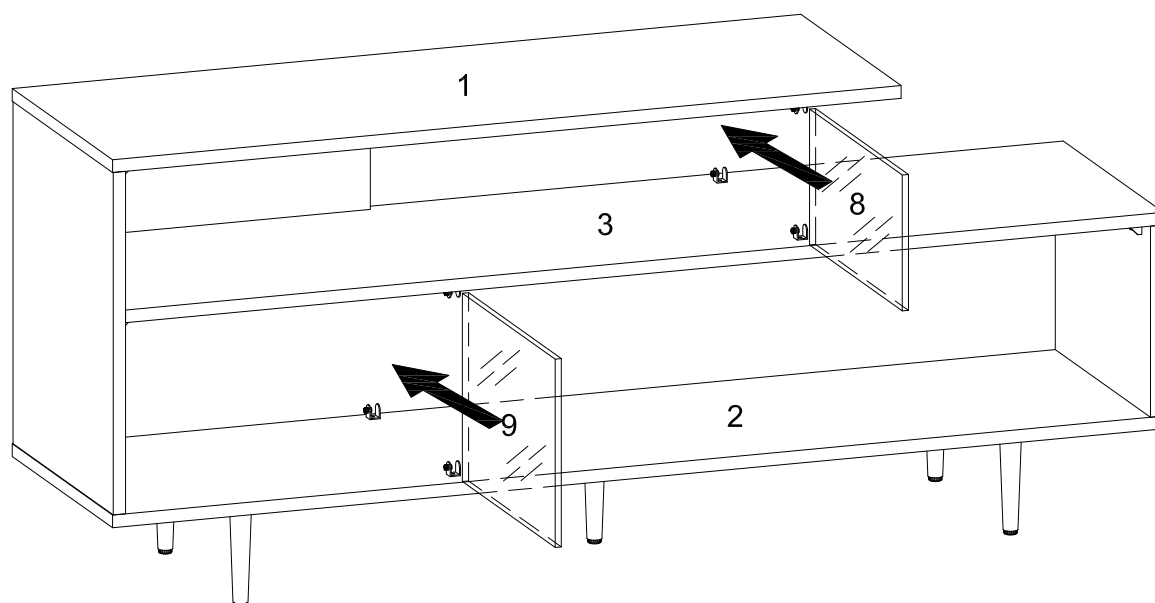

Loosen screw of glass holder (F), insert and secure part (8, 9) to glass holder (F) with with Philips head screwdriver as per diagram.

Step 13

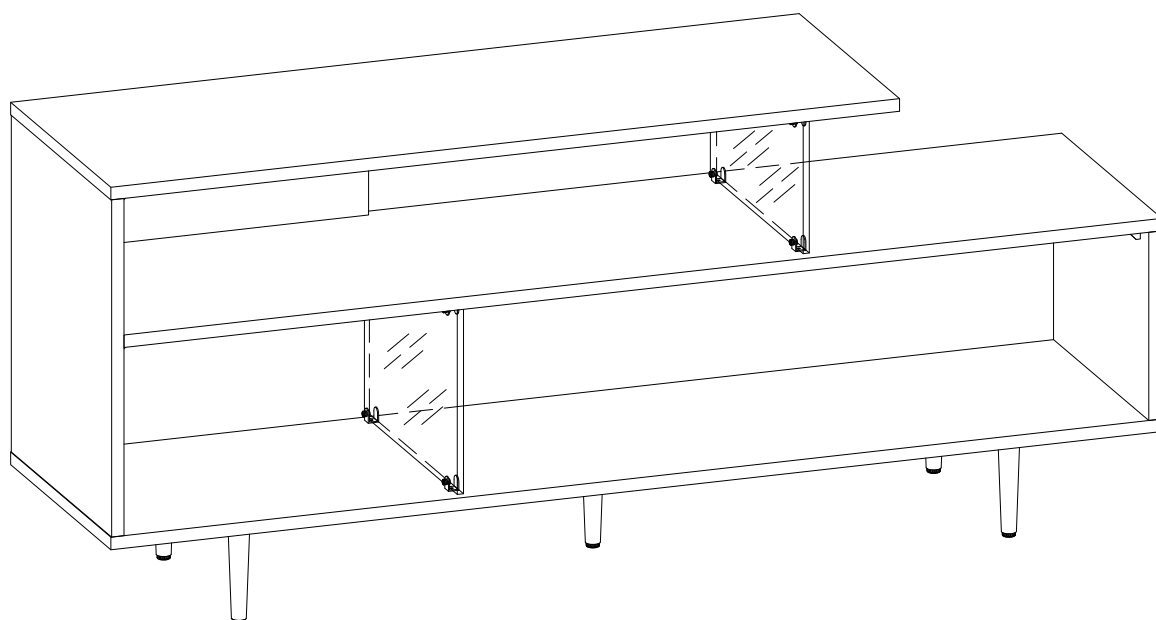

Final Assembly