



Instruction Manual

Outdoor chandelier

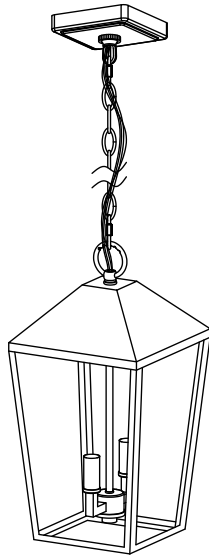


PACKAGE CONTENTS

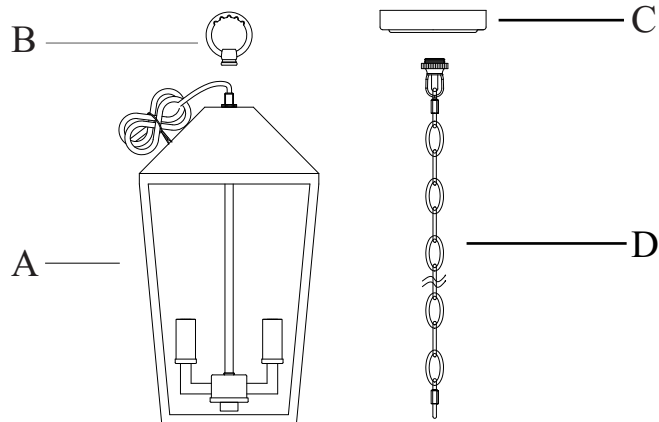

PART	DESCRIPTION	QUANTITY
A	Fixture	1
B	Ring	1
C	Ceiling plate	1
D	Chain sling	1


HARDWARE CONTENTS(shown actual size)



Mounting plate
(Not actual size) x 1



Wire nut x 3



Long
monting x 2
screw

! WARNING

- TURN OFF ELECTRICITY at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- MINIMUM 90°C SUPPLY CONDUCTORS.

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Times: 25 minnutes

Tools Required for Assembly (not included): Flathead screwdriver , Phillips screwdriver, Pliers, Electrical tape, Wire cutters, Safety glasses.

Helpful Tools (not included): Wire strippers, Step ladder.


CAUTION: To avoid any waterproofing problems, please make sure the light fixture fits the mounting surface perfectly installation and use waterproof glue around the canopy for better sealing after installation.


Customer Service: service@24h-reply.com

ASSEMBLY INSTRUCTIONS

1. Attach the mounting plate (AA) to the outlet box (not included) with the long mounting screws (CC).

Hardware Used


- CC** Long mounting screw  x 2
- AA** Mounting plate  x 1

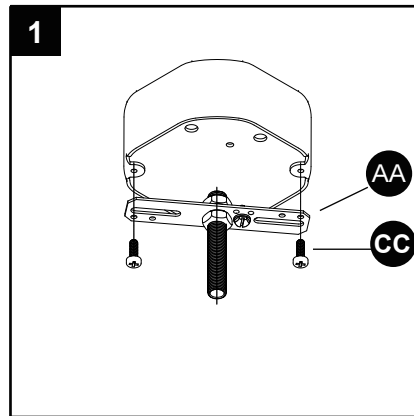

2. For the installation of the main body, first twist the lifting ring (B) onto the lamp body (A), then lock the lifting ring (B) with the hanging chain (D), loosen the outer ring and insert the wire, and also insert the ceiling plate (C) into the wire.


Hardware Used


- A** Fixture  x 1
- B** Ring  x 1
- C** Ceiling plate  x 1
- D** Chain sling  x 1

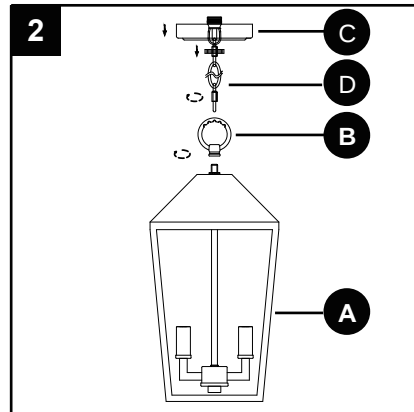

3. Lock the Chain sling (D) onto the screw of the hanging plate (AA)


Hardware Used

- AA** Mounting plate  x 1
- D** Chain sling  x 1

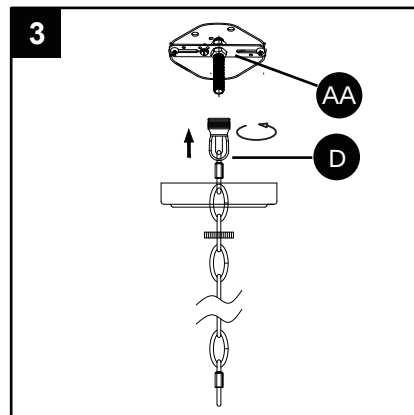


ASSEMBLY INSTRUCTIONS


4. Strip 3/4 in. of insulation from wire ends. Twist stripped ends together with pliers (not included), black to black (power) and white to white (neutral). Attach copper wire to ground wire. Helpful hint: If necessary, attach copper ground wire to grounded outlet box.

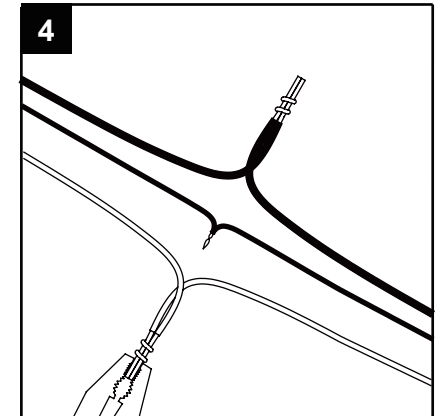

5. Attach wire nuts (BB). Tape wire nuts (BB) and wires together.

Hardware Used

- BB** Wire nut  x 3

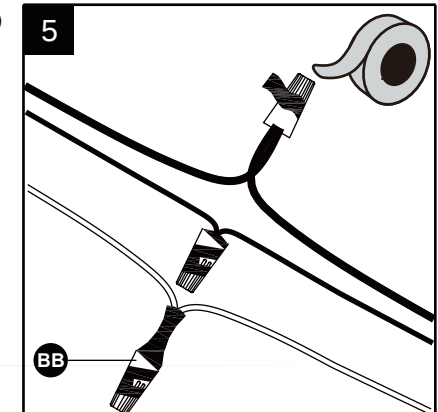

6. Push the ceiling plate upwards, lock it with the outer ring, install the E12 bulb (not included), and complete the installation

