




Tea-for-Two® | K-855-R

66" x 36" alcove bath with integral flange and right-hand drain

Features

- Spacious design accommodates up to two bathers
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Safeguard® slip-resistant surface provides excellent traction underfoot

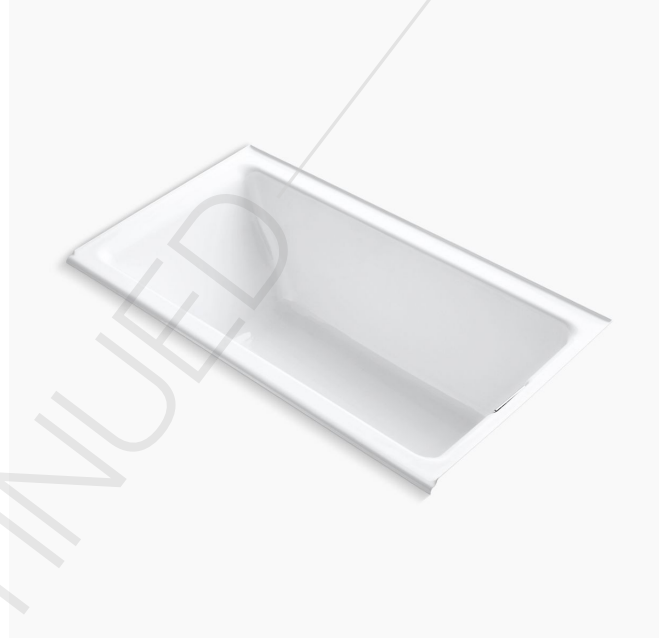

Sustainability



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 19:04 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.1/CSA B45.2
ASTM F462

Warranty

See website for detailed warranty information.

KOHLER® Enameled Cast Iron Bath and Shower Base
Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Drain Location:	Right
Drain Hole Diameter:	2-1/2" (64 mm)
Minimum Flat for Door:	1-13/16" (46 mm)
Basin Area, Bottom:	45" x 25" (1143 mm x 635 mm)
Basin Area, Top:	58" x 29" (1473 mm x 737 mm)
Water Depth:	19-1/2" (495 mm)
Water Capacity:	105 gal (397.5 L)
Minimum Floor Load:	81 lbs/ft ²
Weight:	440 lbs (199.6 kg)

Material

- KOHLER® enameled cast iron

Recommended Products/Accessories

K-587 Undermount kit for select 66" Tea-for-Two bath models

K-23726 Drain treatment

K-23725 Cast iron cleaner

Required Products/Accessories

- K-23857 Bath drain trim


or

- K-78440 33" cable pop-up bath drain



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 19:04 - US-CA

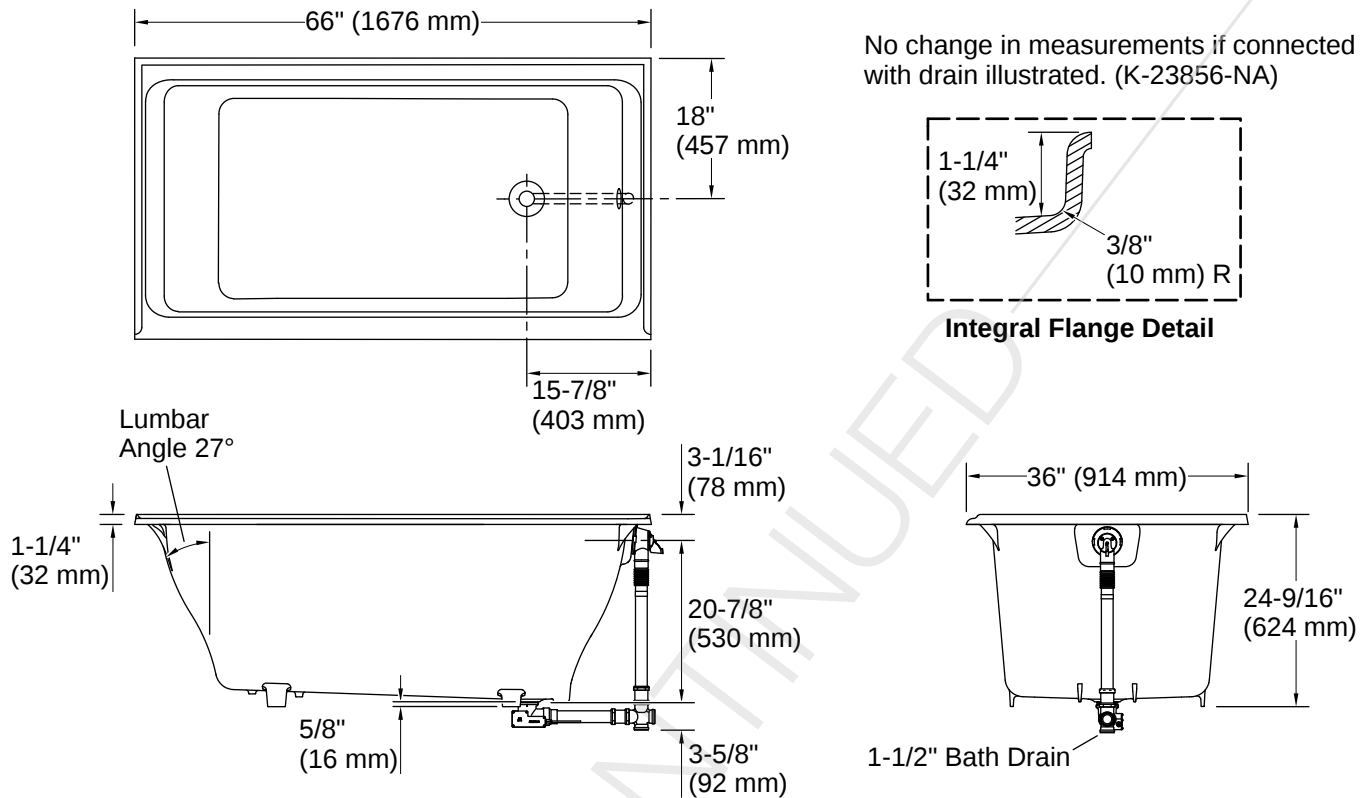

Installation

- Right drain
- Alcove
- Requires cable pop-up bath drain and bath drain trim (sold separately)

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.
The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

