


ASSEMBLY INSTRUCTIONS.

PENDANT LAMP BLACK

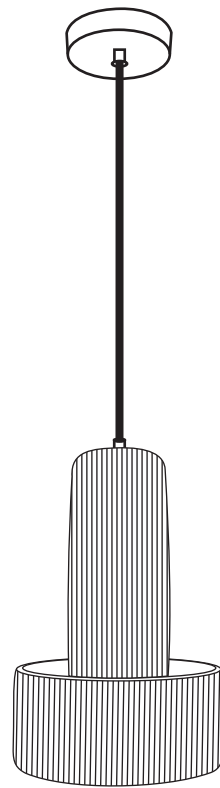


THANK YOU FOR YOUR PURCHASE!

PARTS AND HARDWARE.

(A) Mounting Plate 1 x 

(B) Canopy 1 x 

(C) Wire Connector 3 x 

(D) Screw 2 x 

NOTES.

All wires are connected. When unpacking be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled.

To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing light bulb.

Do not touch bulb when fixture is turned on or look directly at lit bulb.

Keep flammable materials away from lit bulb.


operating the pendant.

CAUTION: To prevent the risk of fire, do not use light bulbs with wattage greater than 5W LED.

STEP 1. TO ASSEMBLE

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Attached the ground wire from the fixture to the ground junction box wire from the outlet box (Usually green or bare wire). Or wrap the fixture's ground wire around green ground screw (b), and then fix the green ground screw into the mounting plate(A).
4. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector(a) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector(a) and wrap the connection with electrical tape.
5. Fasten mounting plate (A) onto the ceiling outlet box using two mounting screws (c) .
6. Attach the canopy (B) to the mounting plate (A).
7. Insert the 5 Watt LED bulbs (Not Included) into threaded sockets.
8. Restore power to the junction box and test lamp fixture.
9. Installation is complete.

STEP 2.

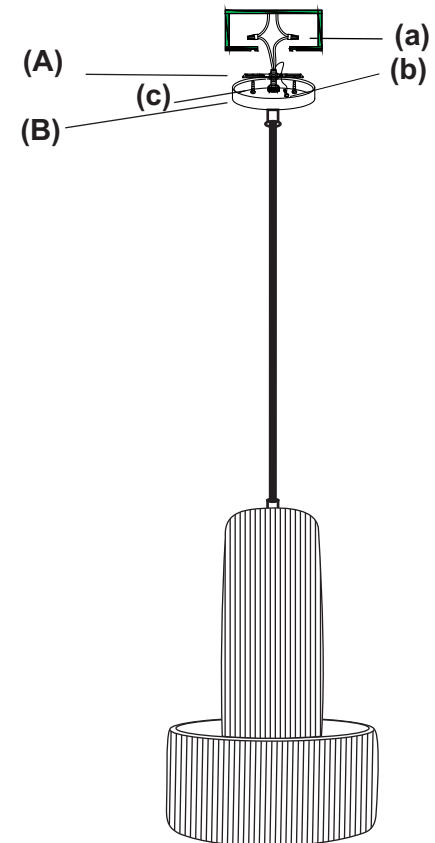

Do not use polishes or cleaners on your lamp.
USE DRY CLOTH TO CLEAN.