



Installation Instruction

1



Turn off the power.

2




Install mounting bracket.

3



Screw the long stem and Short Stem to the Lamp Body .
Make sure to feed the branch wires of the fixture through the stems during assembly. Remove or add stems to adjust the height. Then screw the canopy to the stem.

4




Wire connection

- B-Black wire (L) from junction box
- C-White wire (N) from junction box
- D-Green wire/bare copper (G) from junction box
- E-Black wire (L) from fixture
- F-White wire (N) from fixture
- G-Green wire/Bare copper from fixture
- H-wire connector x 3


Connect wires.

5

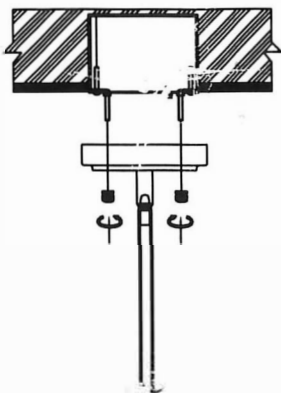

Nut anti clockwise.

6

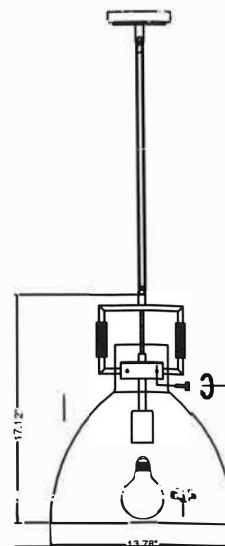

Fix the glass on the lamp body with 4 screws,
and then install the bulb

Warning:

1. Please wear gloves during the installation.
2. Do not install on ceiling which is damp or with wet limewater.
3. Cut off the electricity before installation in case of being shocked.
4. Make sure the connected bolt is tightly locked before getting through the electricity.



5. Do not cut off the electricity before washing or repairing, and use the scour without causticity.
6. Please cut off the electricity and wait until the bulb gets cooling before replacing the bulb in case of being burned.