



K-922

Wall- or -ceiling-mount bath filler

Features

- Pressure-compensating flow control delivers a splatter-free column of water, with minimal splashing while filling
- 0.8" (20 mm) orifice to optimize performance
- Easy-to-access cartridge for cleaning and replacement
- Complements Purist faucets and accessories



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|----|------------------------|
|  | CP | Polished Chrome |
|  | BN | Vibrant Brushed Nickel |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:11 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1

Material

- Solid-brass construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories



K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



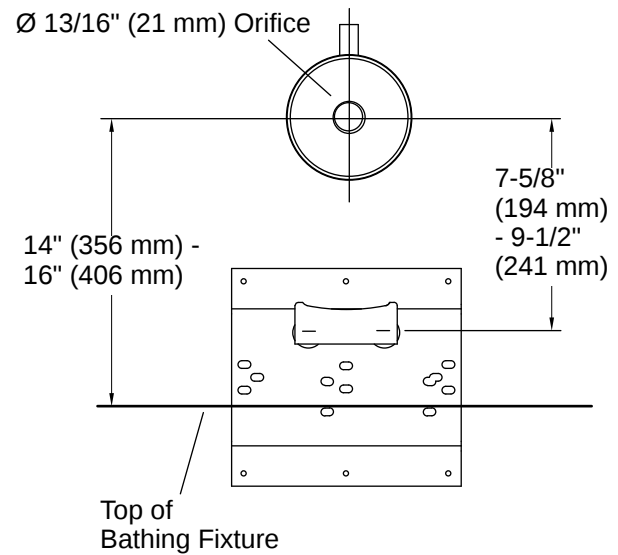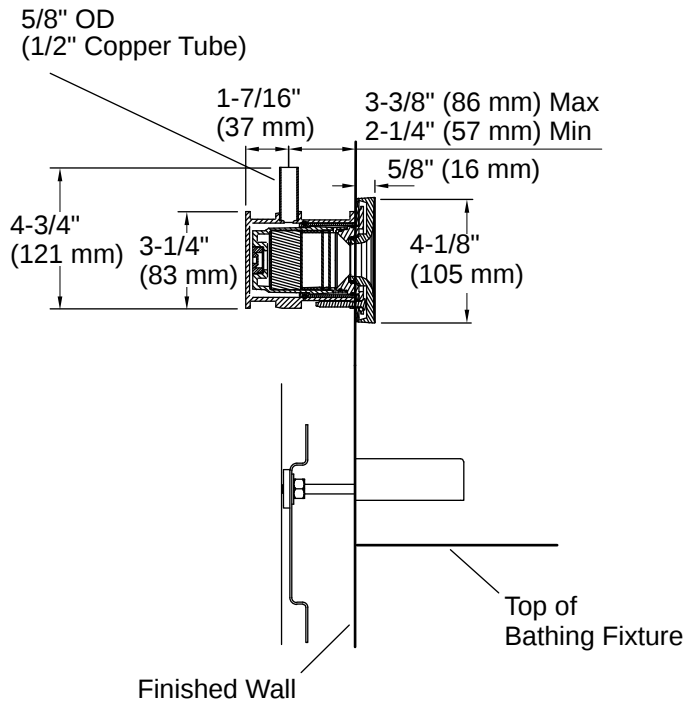

Installation

- Wall- or ceiling-mount

Installation Notes

Install this product according to the installation instructions.

For ceiling-mount installation, product must be mounted a maximum of 9' (2.74 m) above the bath/whirlpool floor. Drip tray is an optional accessory available for wall-mount installation only.

Ensure a minimum of 36" (914 mm) of straight piping prior to the spout.

Minimize the number of 90 degree elbows between the mixing valve and the spout.

When a deck mounted transfer valve (K-408-K or K-409-K) is used for a ceiling mount, install a check valve between the spout and the diverter.

Flow rate is 5-10 gal/min (18.9-37.9 l/min). Splashing may occur if the flow rate is less than 5 gal/min (18.9 l/min).

