

TOTO®

CT705ELN(G)

Flushometer ADA Toilet, 1.28GPF when used with High Efficiency Flushometer Valve

FEATURES

- Floor-mounted
- ADA compliant
- Elongated front bowl
- Optional SanaGloss® ceramic glaze - SanaGloss glaze prevents debris, mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- 10"-12" rough-in

MODELS

- CT705ELNG
Commercial ADA compliant, floor-mounted toilet with SanaGloss ceramic glaze
- CT705ELN
Commercial ADA compliant floor-mounted toilet

ADDITIONAL ITEMS (sold separately)

- SC534 seat
- SC134 seat

FLUSH VALVES			
EcoPower®		Manual	
TET1LN32#CP	1.28GPF	TMT1LN32#CP	1.28GPF
TET1GNC-32	1.6GPF	TMT1NNC-32	1.6GPF
TET6LN32#CP	1.28GPF		
TET6GNC-32	1.6GPF		
TET3LN32#SS	1.28GPF		
TET3GN32#SS	1.6GPF		
TET2GN32#SS	1.6GPF		
TET2LN32#SS	1.28GPF		

COLORS/FINISHES

- Standard
 - #01 Cotton
 - #03 Bone (not available in SanaGloss)
 - #12 Sedona Beige (not available in SanaGloss)

PRODUCT SPECIFICATION

The floor-mounted, ADA compliant, low consumption siphon jet flushing toilet shall be 1.28GPF/4.8LPF when paired with a 1.28GPF flushometer valve and 1.6GPF/6.0LPF when paired with 1.6GPF/6.0LPF flushometer valve. Toilet shall be elongated front bowl and SanaGloss ceramic glaze (CT705ELNG). Toilet shall be TOTO Model CT705ELN_____.



SanaGloss

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14,
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant






CT705ELN(G)

Flushometer ADA Toilet, 1.28GPF when used
with High Efficiency 1.28GPF Flushometer Valve)

SPECIFICATIONS

- Water Use 1.28GPF/4.8LPF
(or 1.6GPF/6.0LPF when
used with 1.6GPF flush
valve)
- Flush System Siphon jet flushing action
- Min. Water Pressure 35 psi (flowing)
- Min. Flow Rate 23 GPM
- Water Surface 10-3/4" x 9-1/4"
- Trap Diameter 1-7/8"
- Rough-in 12", or 10"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT705ELN(G) - 56.5lbs
- Shipping Dimensions CT705ELN(G)
26-1/2" L x 9-1/2" W¹ x 16-
1/4" W² x 19-1/2" H

INSTALLATION NOTES

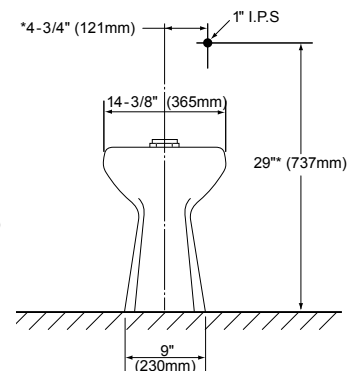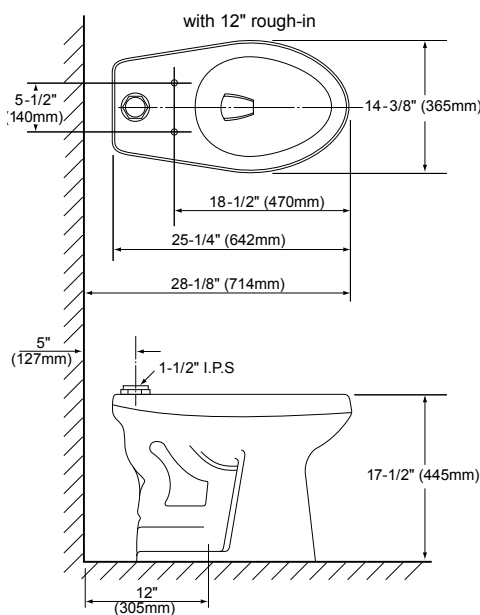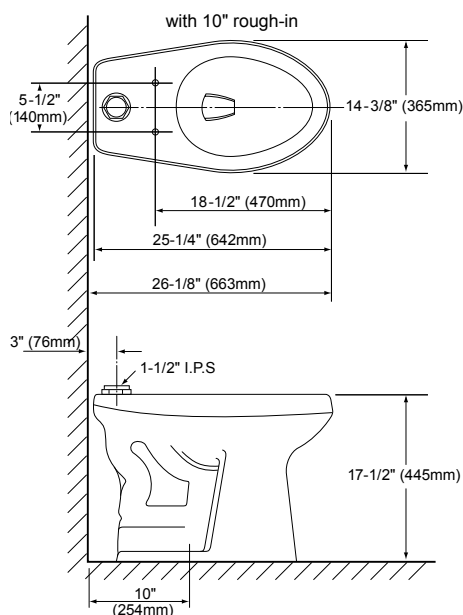

TOTO®

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com

Printed in U.S.A. | © TOTO USA 06/09 | Printed on recycled paper ♻️

SS-00453 v.05