



**ITEM #: RV-CF2131818\_RV-CF2160204\_RV-CF0204\_RV-CF1818**

### **IMPORTANT SAFETY INSTRUCTIONS**

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.  
**Note: Some types of fuses must be unscrewed to shut the power off.**
- If you are unclear as to how to proceed, please consult a licensed electrician.

**UNPACK THE FIXTURE:** Check the contents of the box. Box should contain all items on the parts diagram.



**For any replacement parts or installation issues, please Contact Us!**

**Email:** help@kira-home.com

**Facebook/Instagram:** @KiraHomeDecor

**Phone:** 888.208.2085

**Need help with installation?**

Check out our install Video!

Visit: <http://bit.ly/2YouKyt>




## **INSTALLATION INSTRUCTIONS**

- 1.** Remove Shade (O) from Canopy (E) by unscrewing three decorative caps on the inner portion of Shade (O). Unwrap Shade (O).
- 2.** Install Canopy Screws (D) and hex nuts onto Mounting Plate (A). Canopy Screws (D) should be installed facing towards the ground screw.
- 3.** Measure Canopy (E) height with measuring tape. Adjust Canopy Screws (D) on Mounting Plate (A) to the height of measured Canopy (E) plus 1/4" to allow them to protrude through Canopy (E) during installation. Lock Canopy Screws (D) in place with the hex nuts.
- 4.** Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided. Ensure Mounting Plate (A) is positioned with Canopy Screws (D) pointing away from the junction box.
- 5.** Place Canopy (E) against ceiling by inserting Canopy Screws (D) through appropriate holes located on Canopy (E). 1/4" of the threaded portion of Canopy Screws (D) should be visible (readjust Canopy Screws (D) if 1/4" is not visible). Remove Canopy (E).

**Note: If you are having difficulty threading Canopy Screws (D) through Canopy (E), use the included Straws (G) as guides and refer to our video above.**

6. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

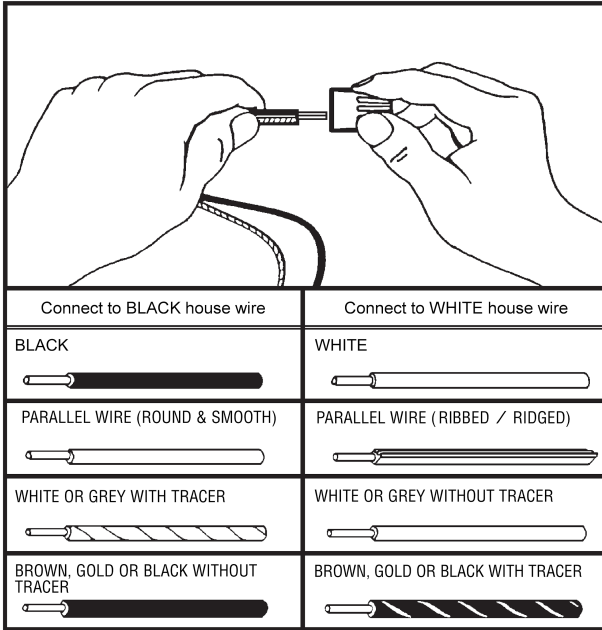

- A. Connect the ground wire (bare copper or green) from your fixture to the:
- 1) ground wire in the junction box, or
  - 2) ground screw in the junction box
- B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

7. Place all wires and Wire Connectors (C) back into the junction box.
8. Place Canopy (E) against the ceiling, ensuring Canopy Screws (D) are protruding through the holes in Canopy (E). Secure the fixture in place to Canopy Screws (D) with Decorative Caps (F).  
**Note: If fixture does not sit flush against the ceiling, remove fixture and readjust Canopy Screws (D) and hex nuts.**
9. Re-attach Shade (O) with previously removed decorative caps from Step 1.
10. Install light bulbs (not included) into Sockets (F).
11. Remove Finial (N), Cap (M), Metal Washer (J) and Hex Nut (L) from Screw Stem (H).
12. Attach Screw Stem (H) to coupling inside Canopy (E) and lock in place with hex nut.
13. Place Diffuser (I) against the shade supports on the bottom of Shade (O).
14. Secure Diffuser (I) to Screw Stem (H) using Metal Washer (J) and Hex Nut (L).
15. Place Cap (M) against Diffuser (I) and secure in place using Finial (N).

Enjoy your new fixture!

HELPFUL TOOLS: Safety Goggles, Screwdriver, Ladder, Measuring Tape

