




Product Installation Instructions

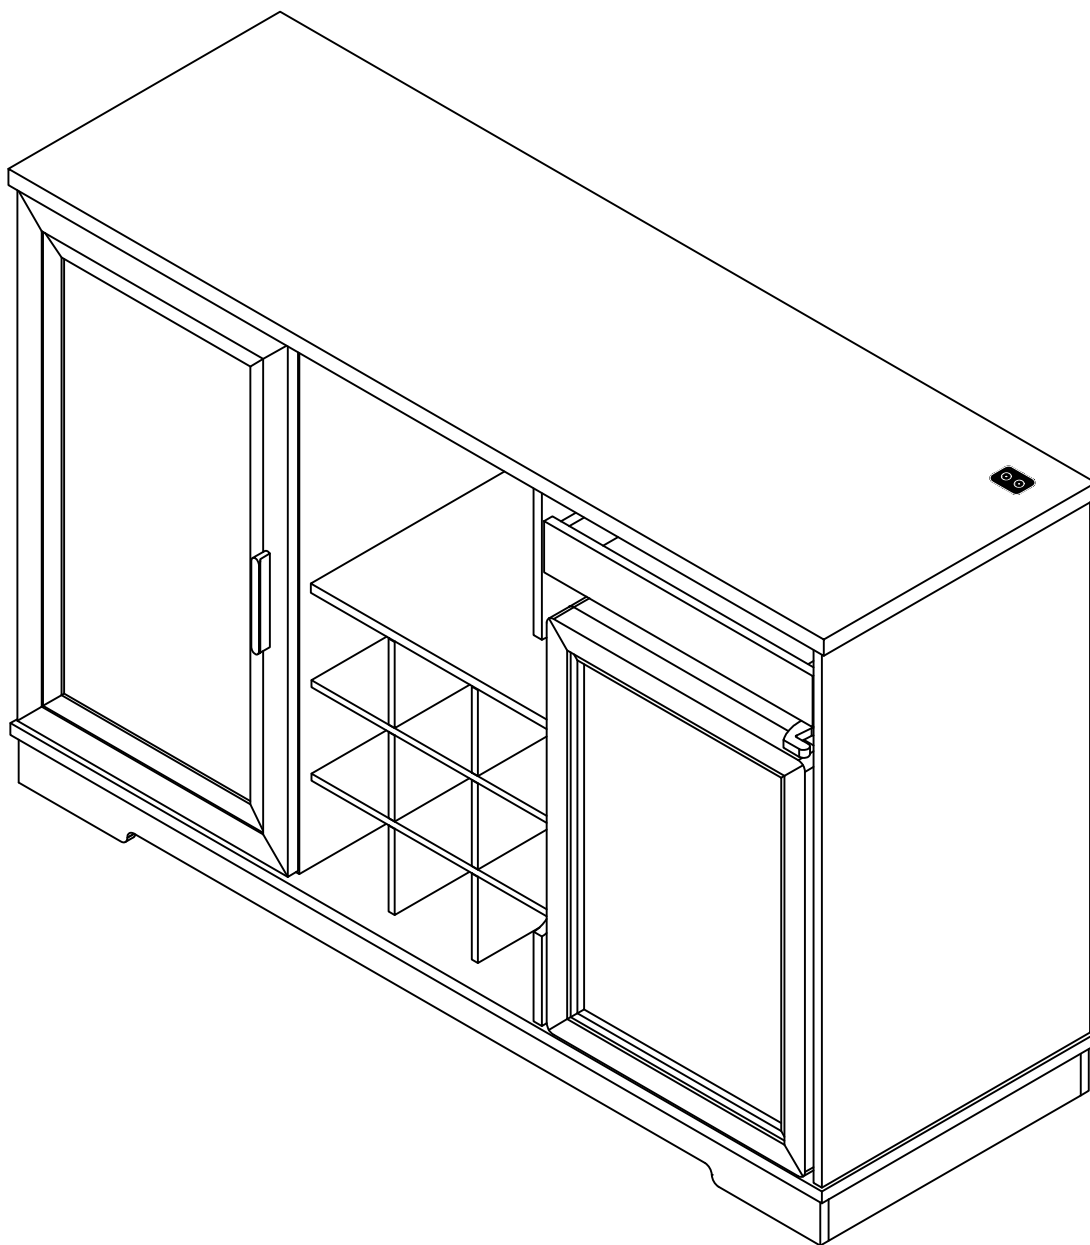





Ax1




Bx1




Cx1




Dx1




Ex1




Fx1




Gx1




Hx1




Ix2



Jx2

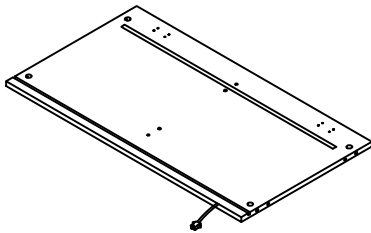


Kx1




Lx1




Mx1




Nx1




Ox1



Px1




Qx1




Rx1




Sx1

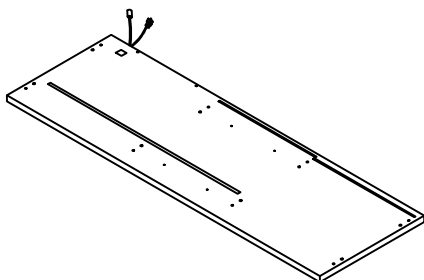


Tx1



Ux1



Vx2











Wx2





1


Accessories list

①		Two in one screw (6x28mm)	60pcs +4pcs
②		Two in one nut (10x12mm)	60pcs +4pcs
③		Wood chipping (6x30mm)	24pcs +3pcs
④		Guide & Screw(29cm) (3x12mm)	10pcs +2pcs 2pcs
⑤		Non-slip pads	8pcs +4pcs
⑥		Wine glass rack & Screw (3x16mm)	4pcs +1pcs 2pcs
⑦		Hinge & Screw (3.5x12mm)	12pcs +2pcs 2pcs
⑧		Handle & screw (4x18mm)	2pcs +1pcs 1pcs
⑨		Fixing clip & screw (3x16mm)	8pcs +1pcs
⑩		Wire Clamp	2pcs +1pcs
		AC/DC Adapter (12V=2.0A)	1pcs


Double-head screwdriver, use as required



Product structure decomposition

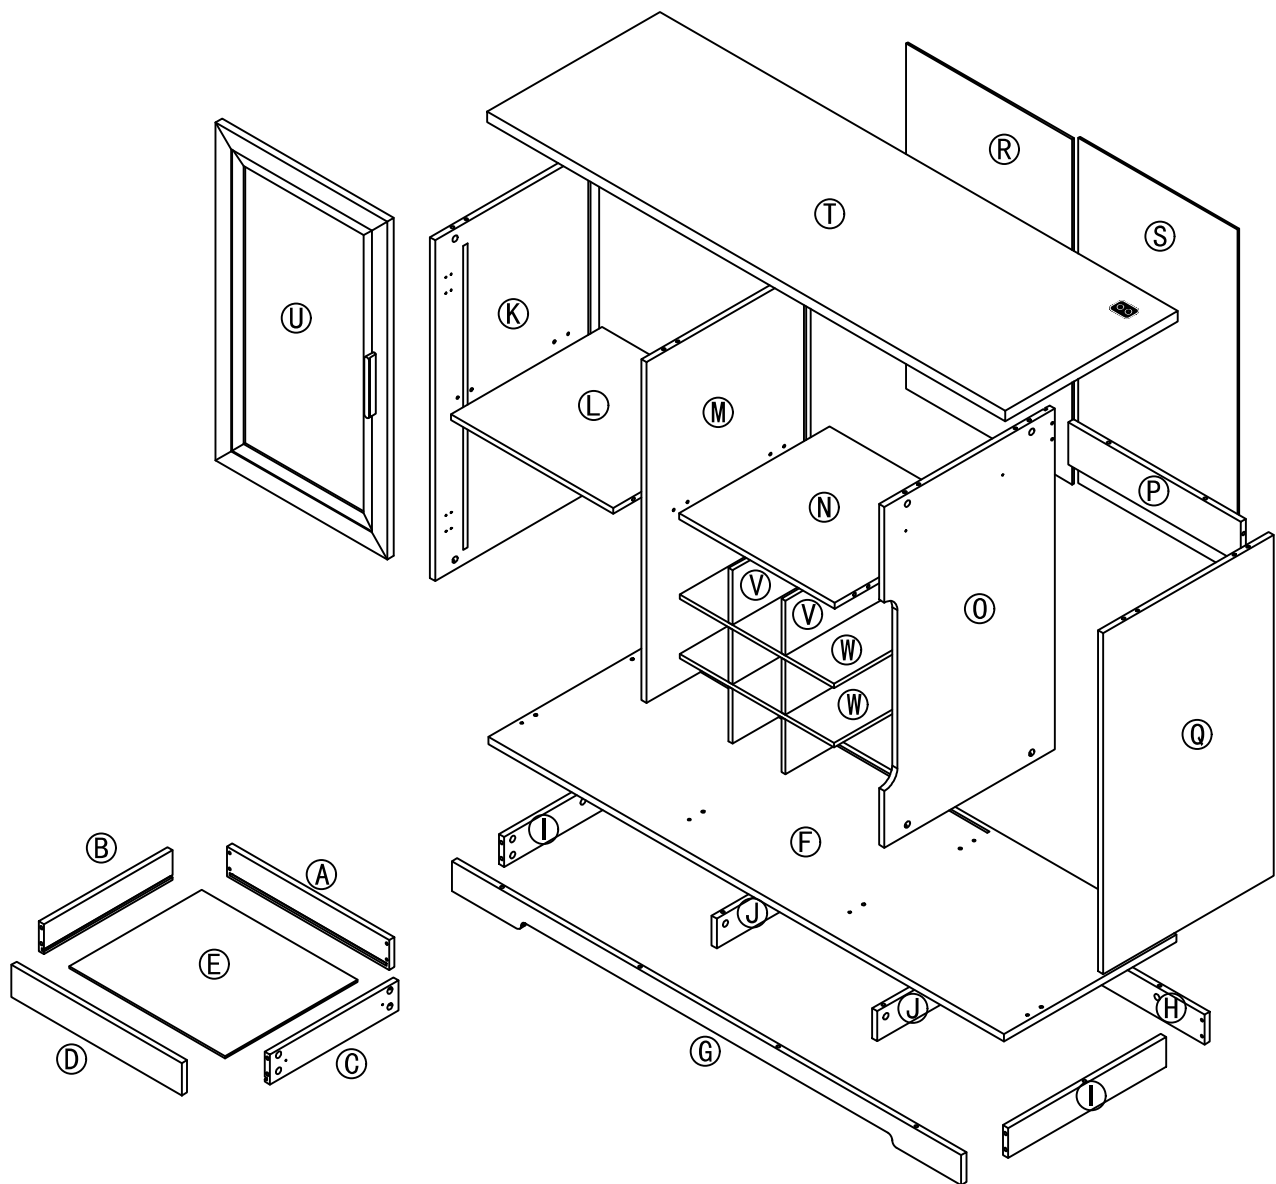

1




8pcs

2



8pcs


4



2pcs




4pcs

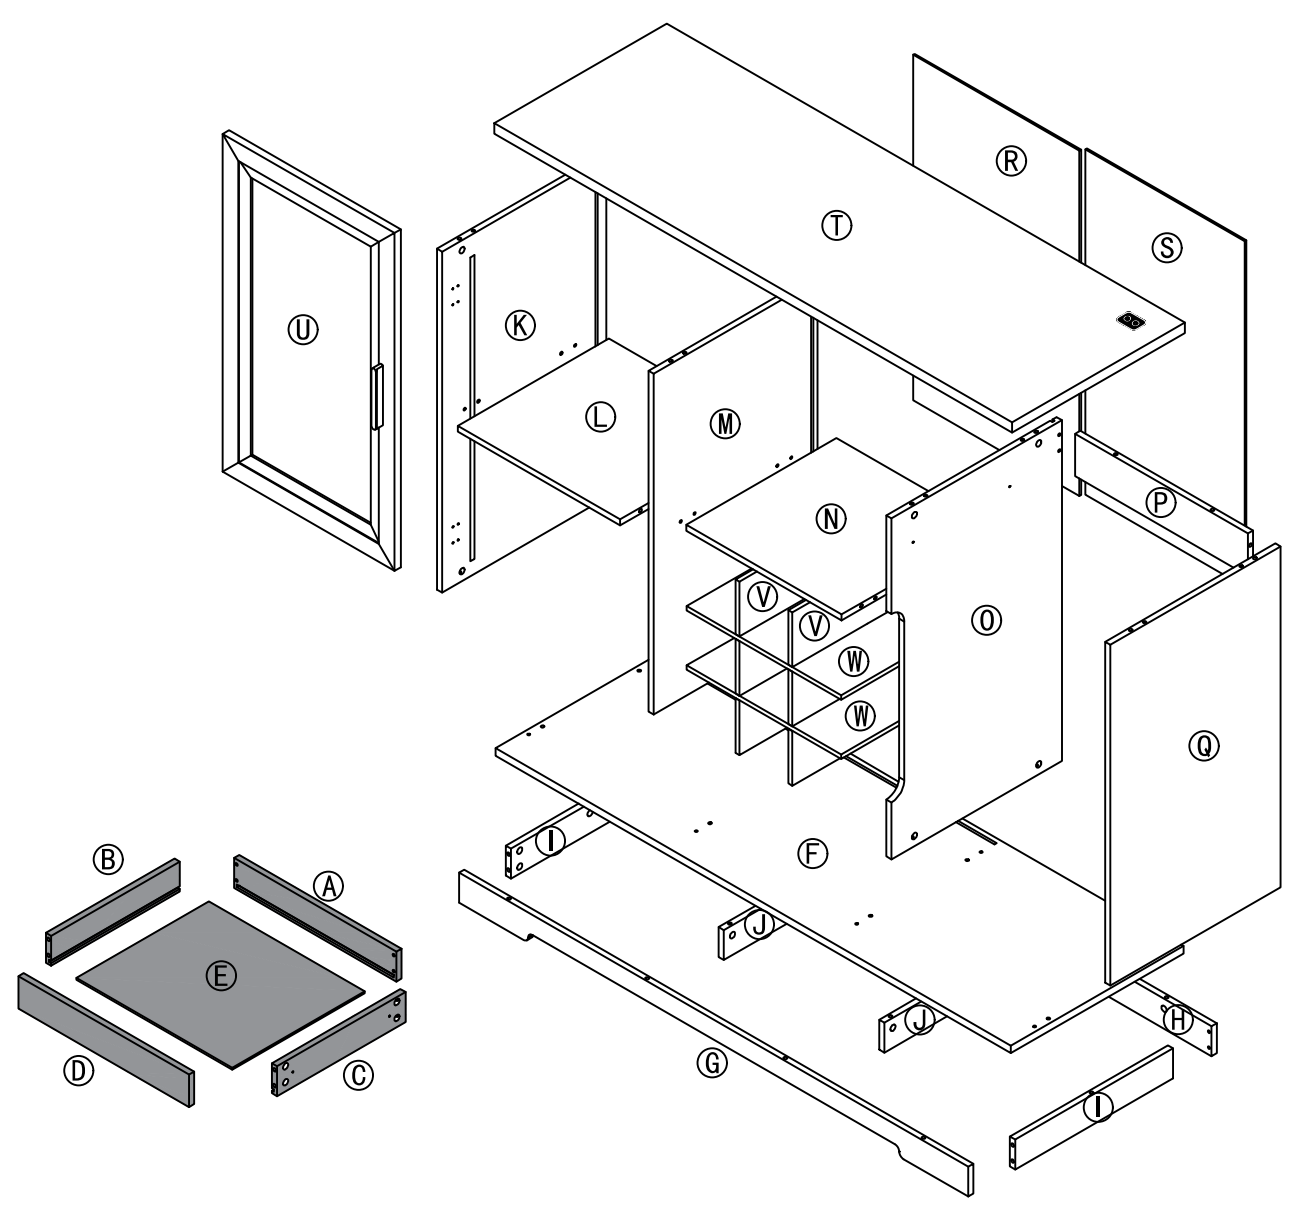


Use parts ① and ②



Step1

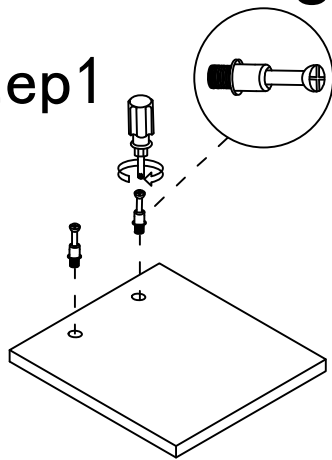


Step2

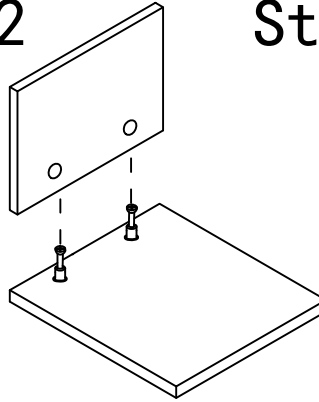

Step3

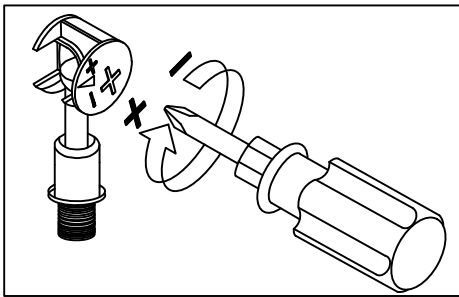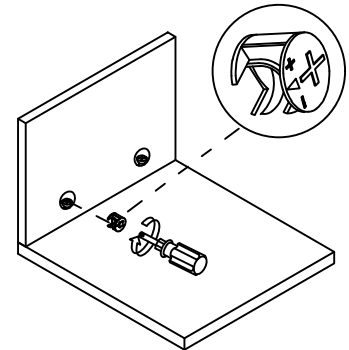



Use a screwdriver to lock in the direction of the "+" sign

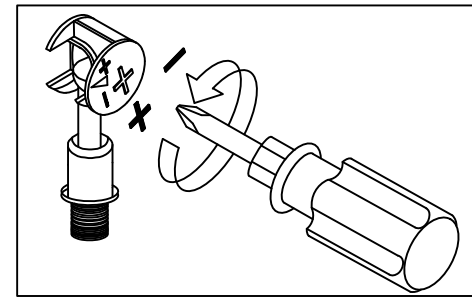


Disassemble along the direction of "-" sign

Step 1


①

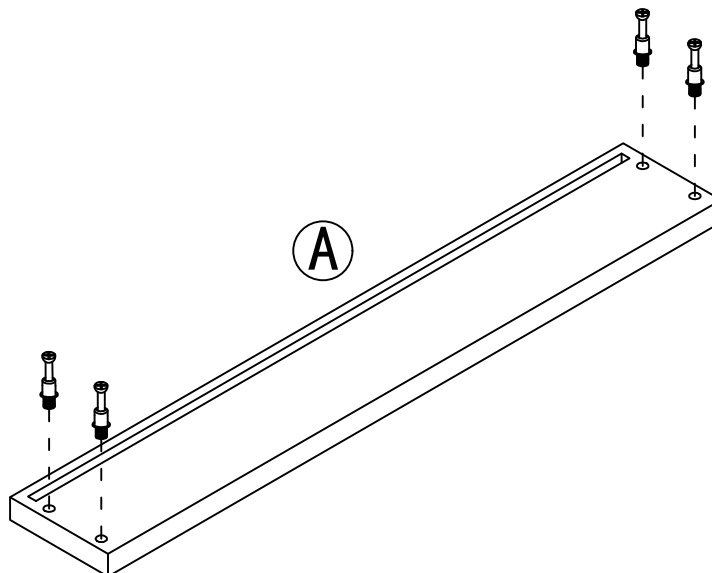



Step 2

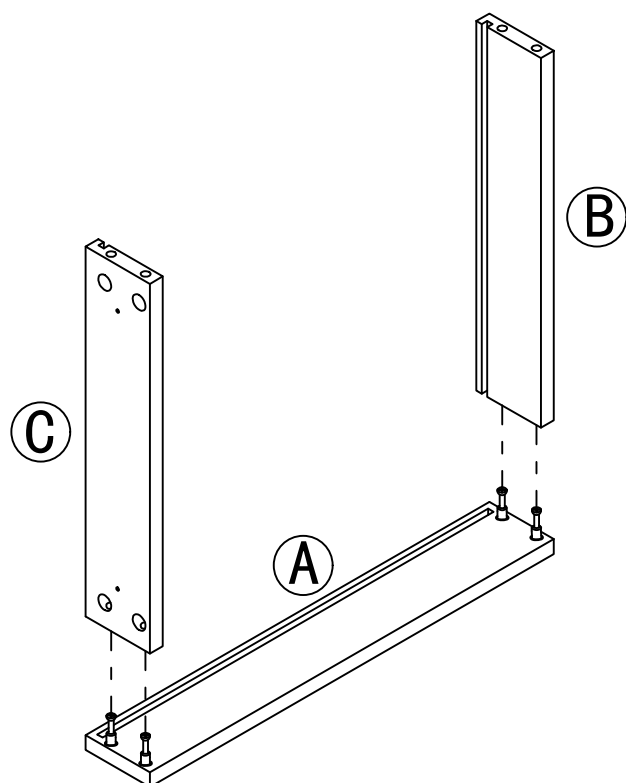


Step 3

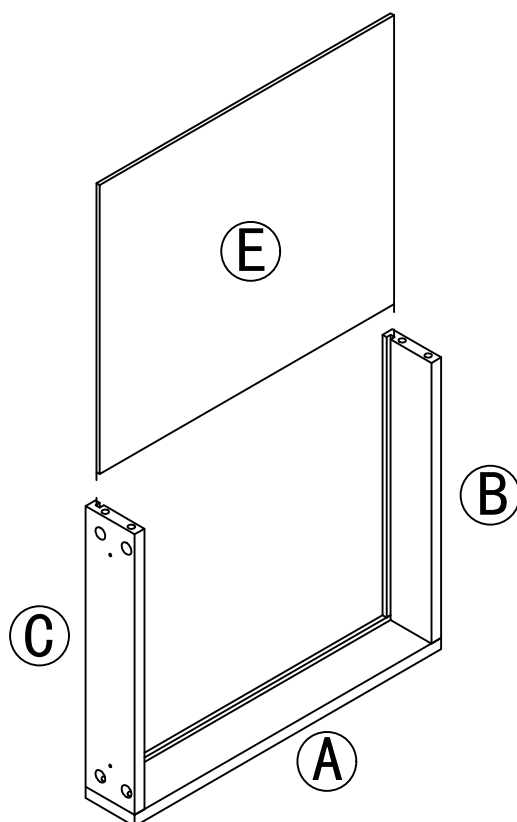


Step 4

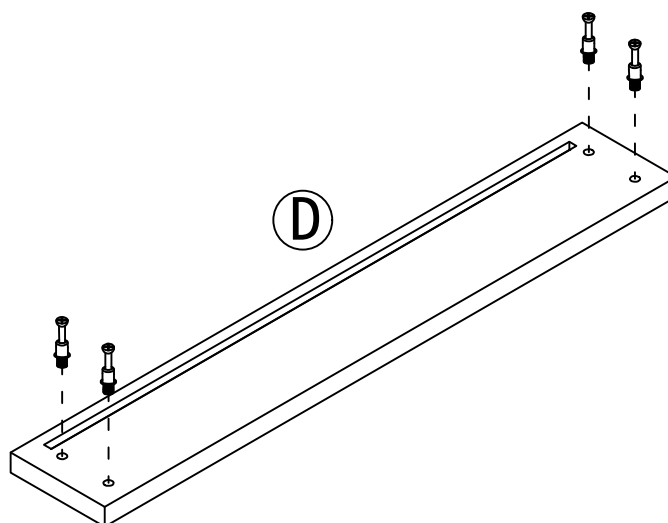

Step 5

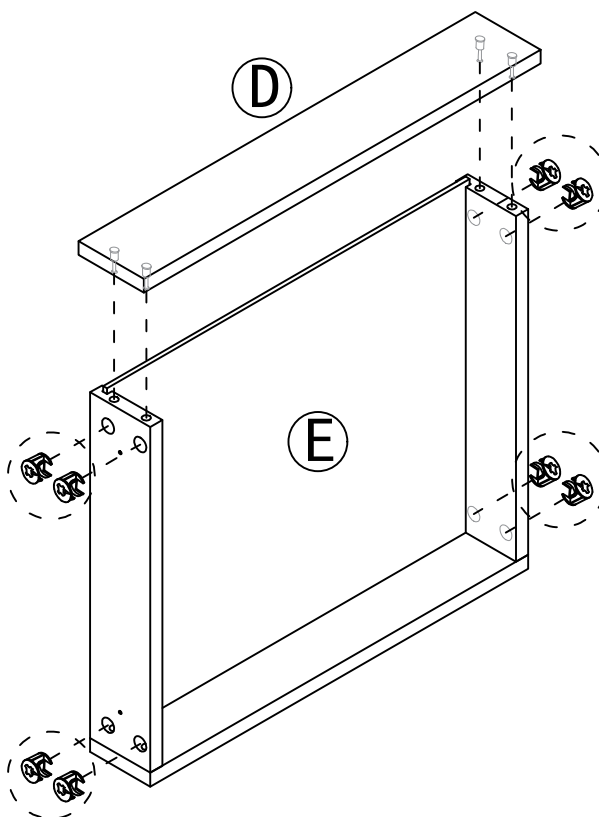


Drawer rail breakdown diagram

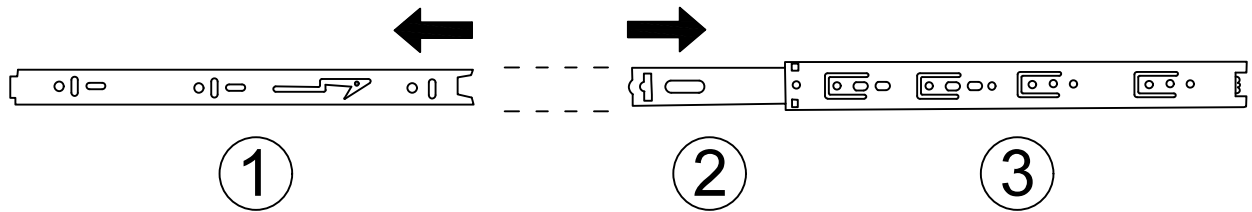


① Dismantle the schematic diagram

Step 1 : Pull the rails apart

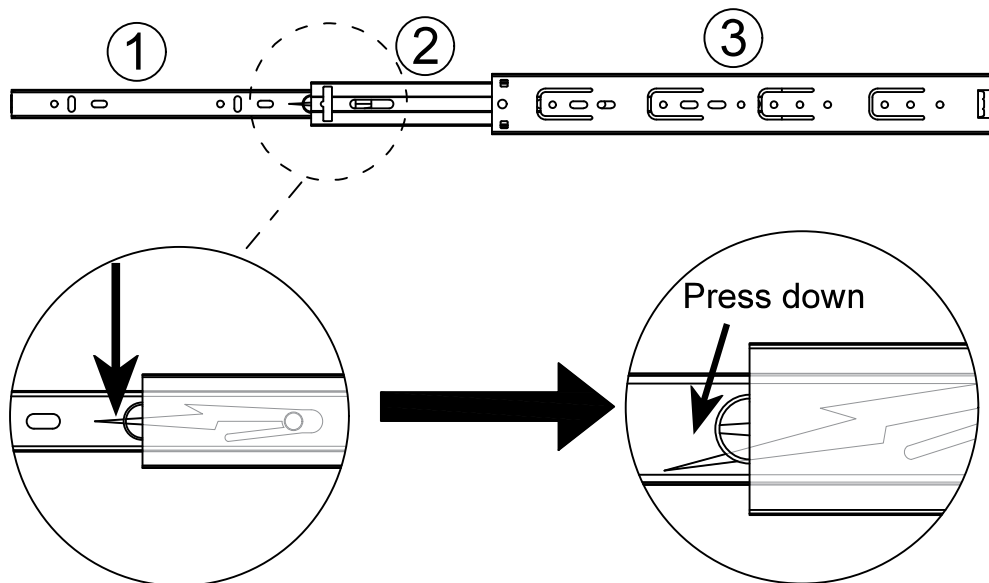


Step 2 : Press the nylon button and pull out ①.

Drawer rail decomposition completed schematic diagram

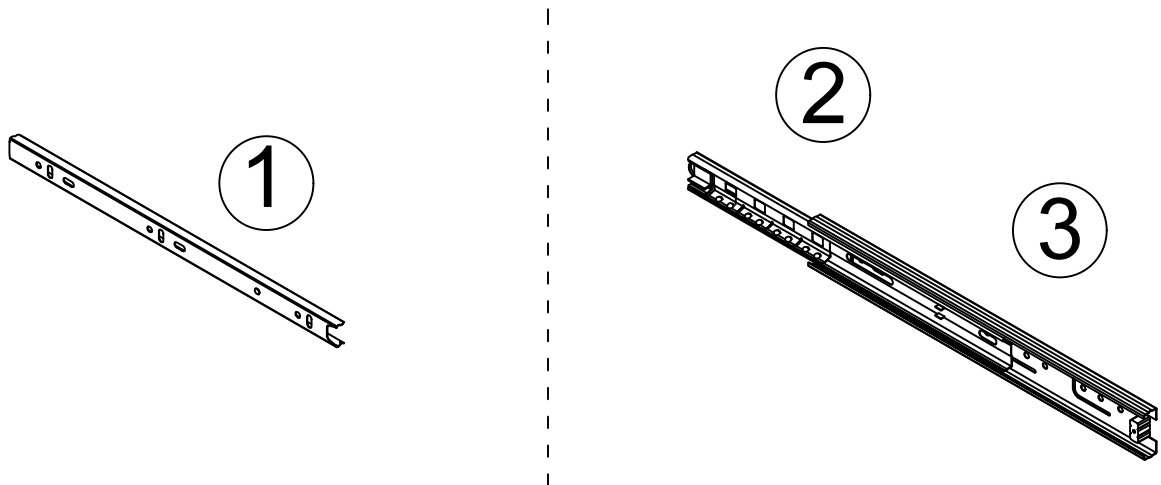

Step 6

4






x2




x4

1



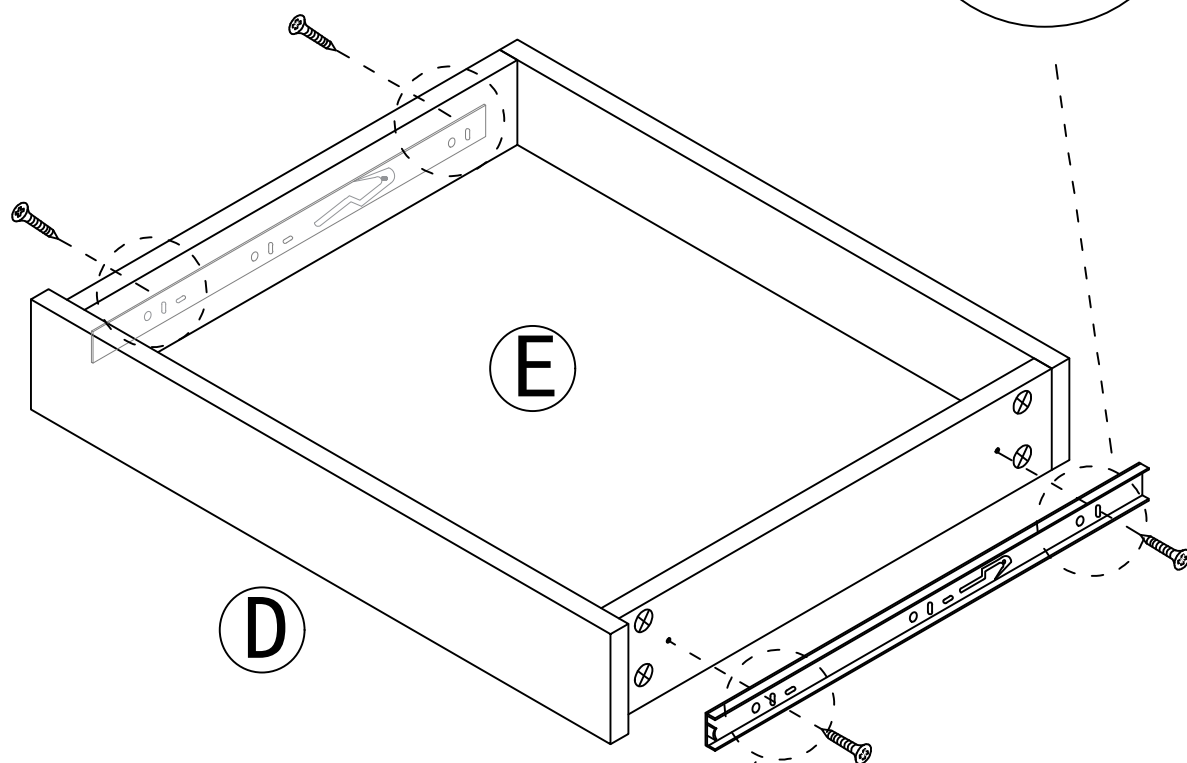

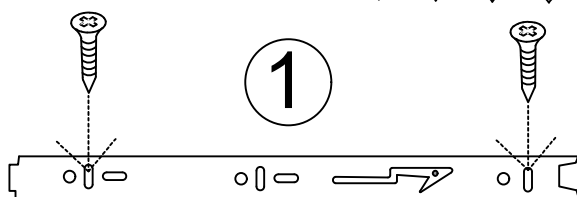



D

E





8



①		52pcs	②		52pcs	③		24pcs
④	 2pcs	 6pcs	⑤		8pcs	⑥	 2pcs	 4pcs
⑦	 2pcs	 12pcs	⑧	 1pcs	 2pcs	⑨	 2pcs	 8pcs
⑩	 2pcs			 1pcs				

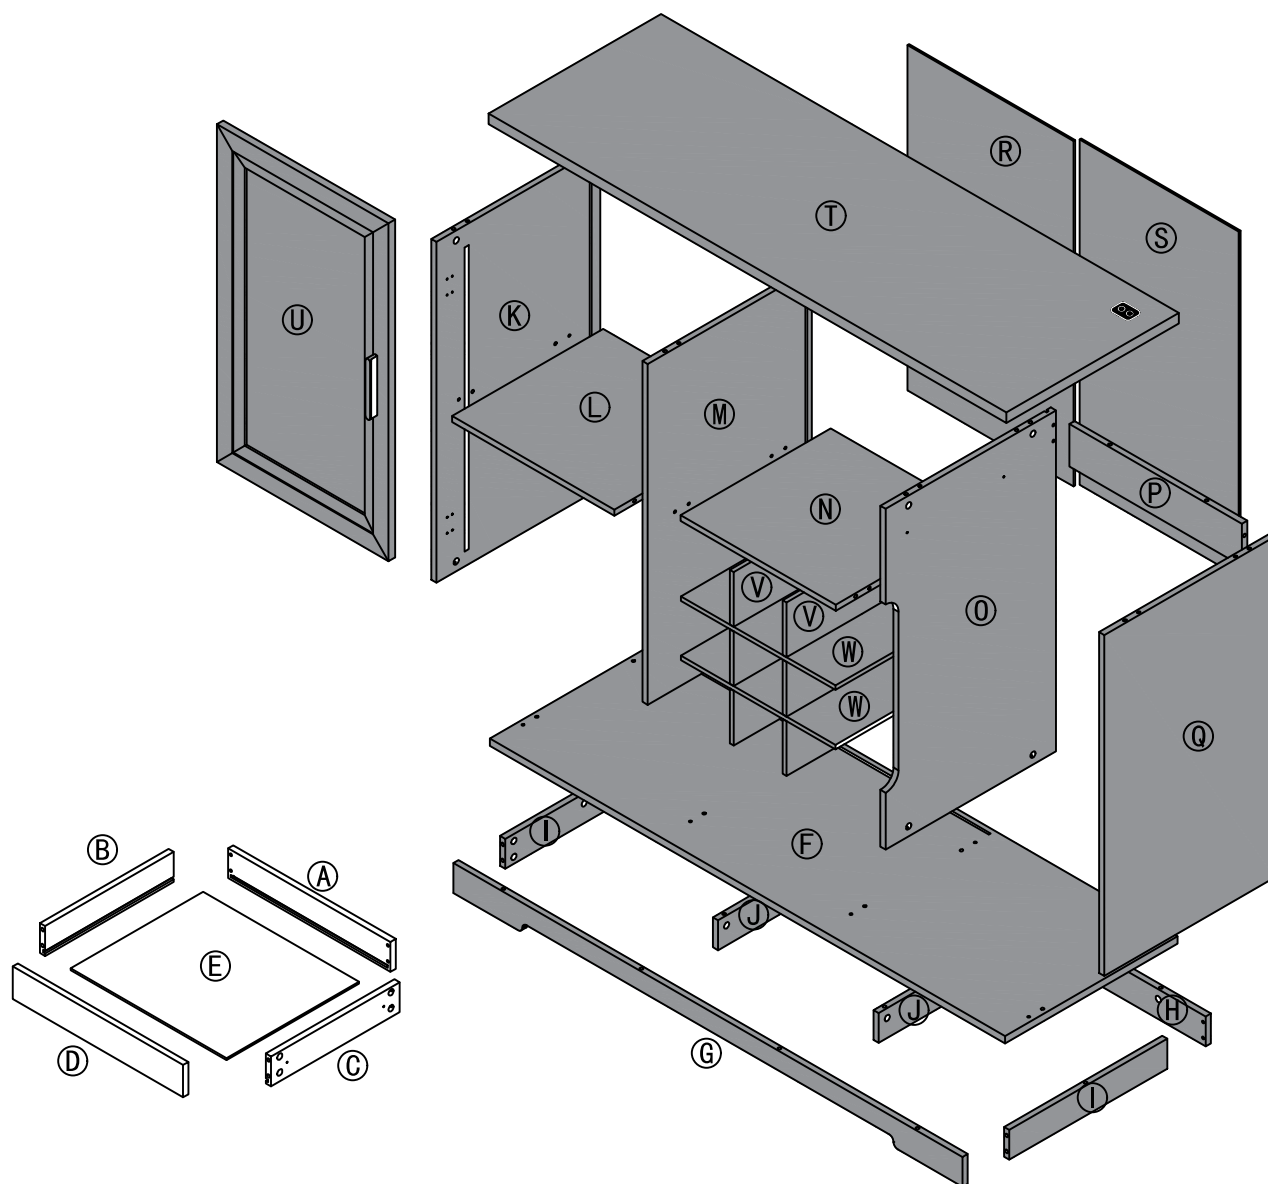

Step 7

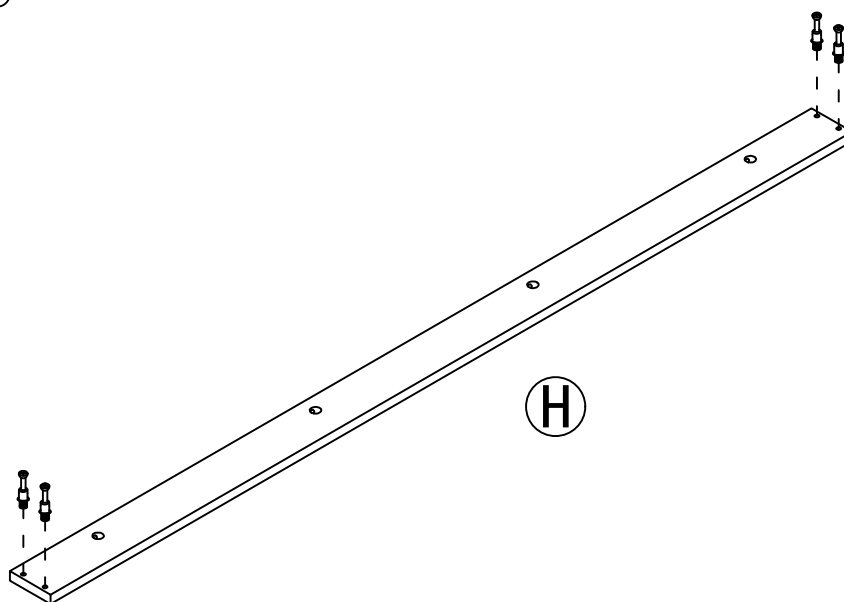

Step 8

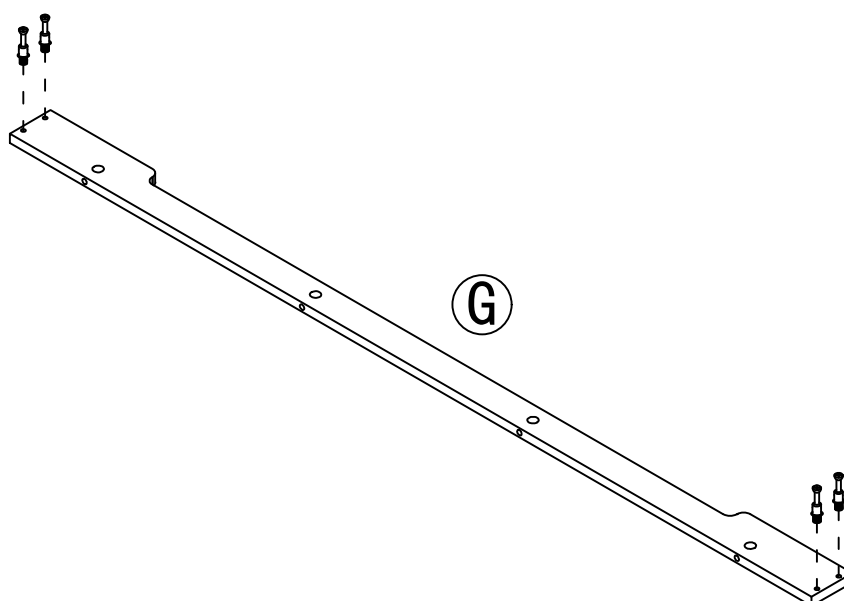


Step 9

②



x4

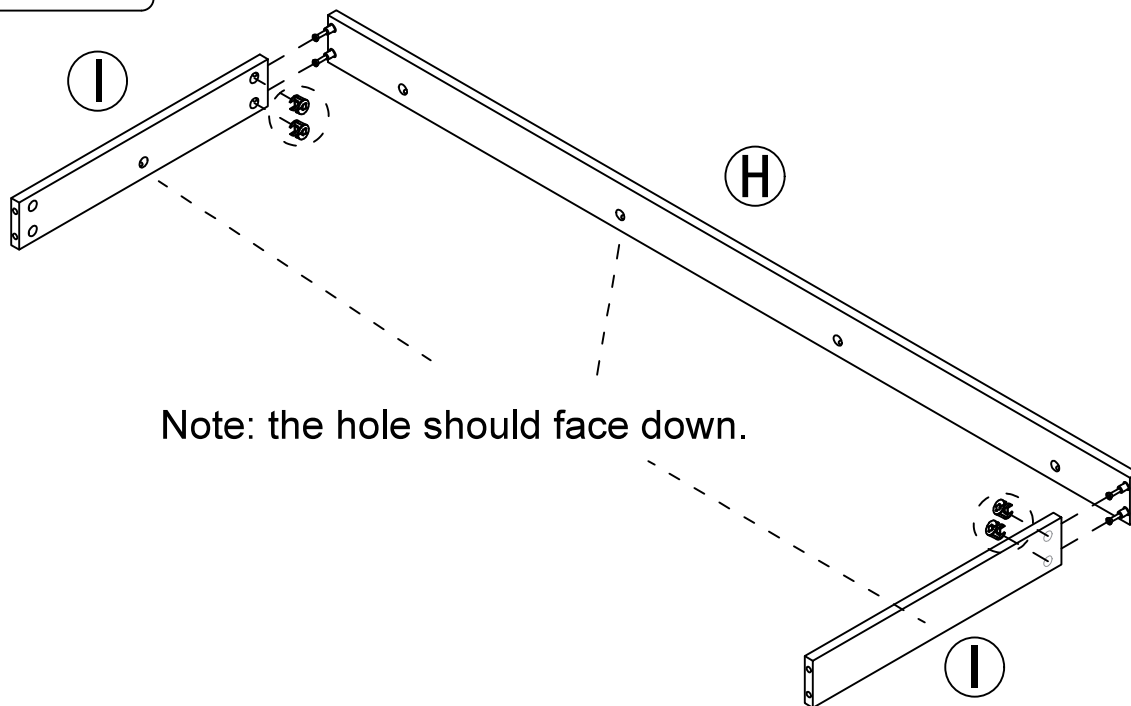


Note: the hole should face down.

Step 10



②




x4

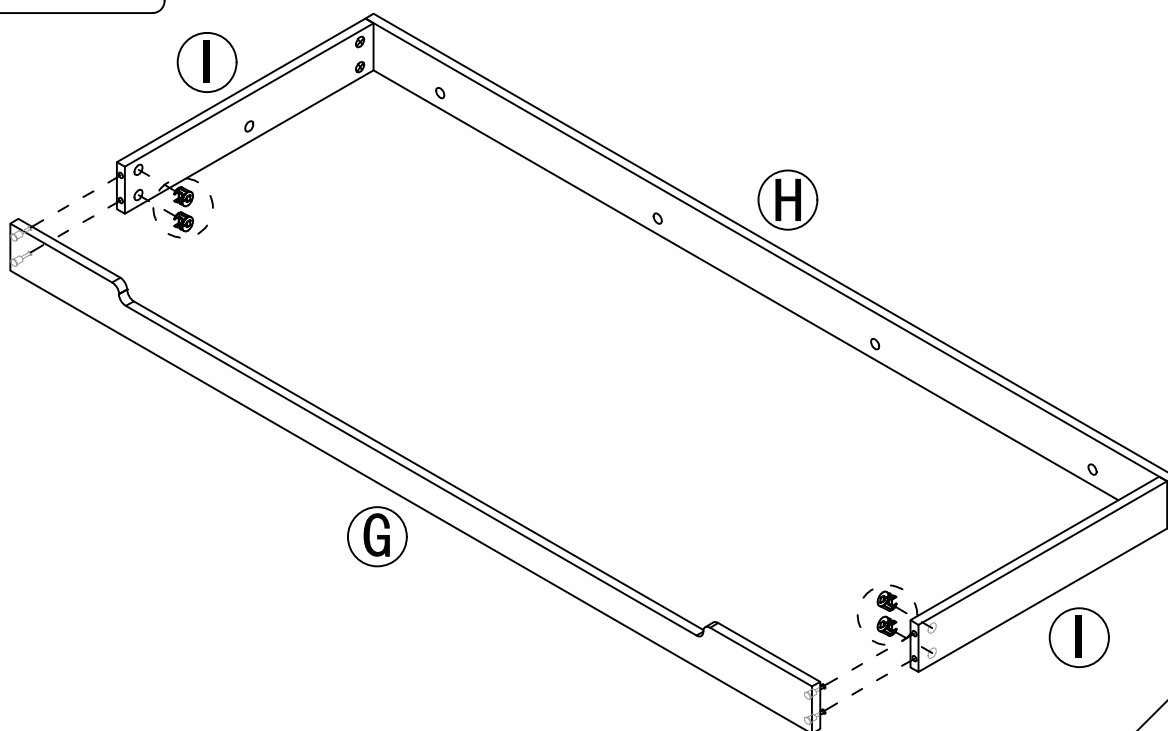

Step 11

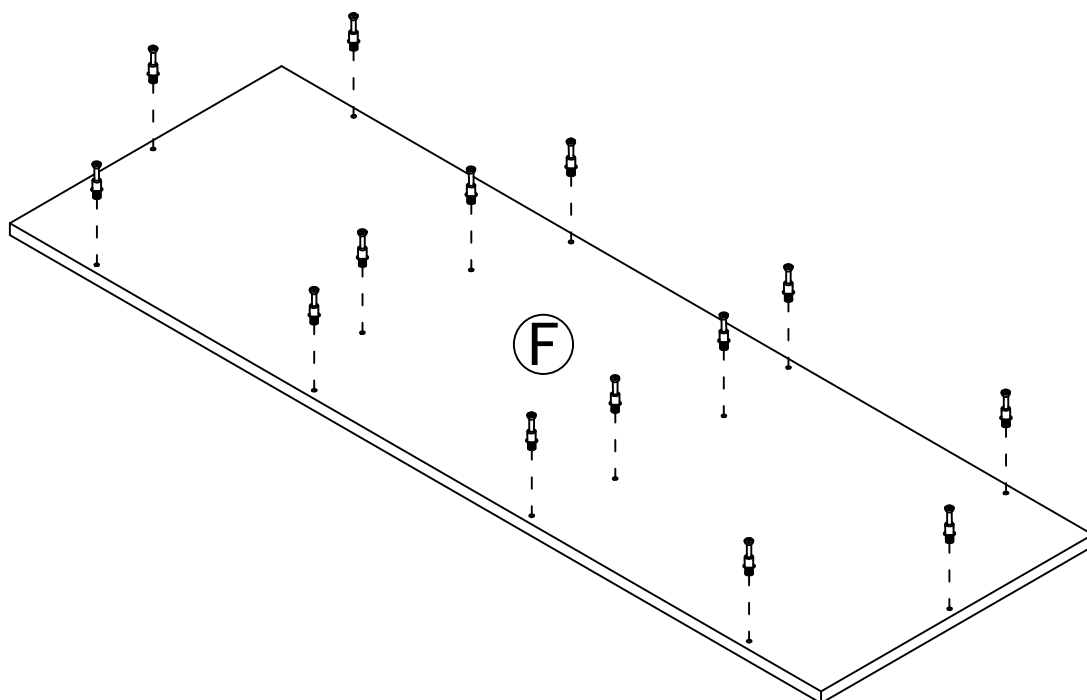

Step 12

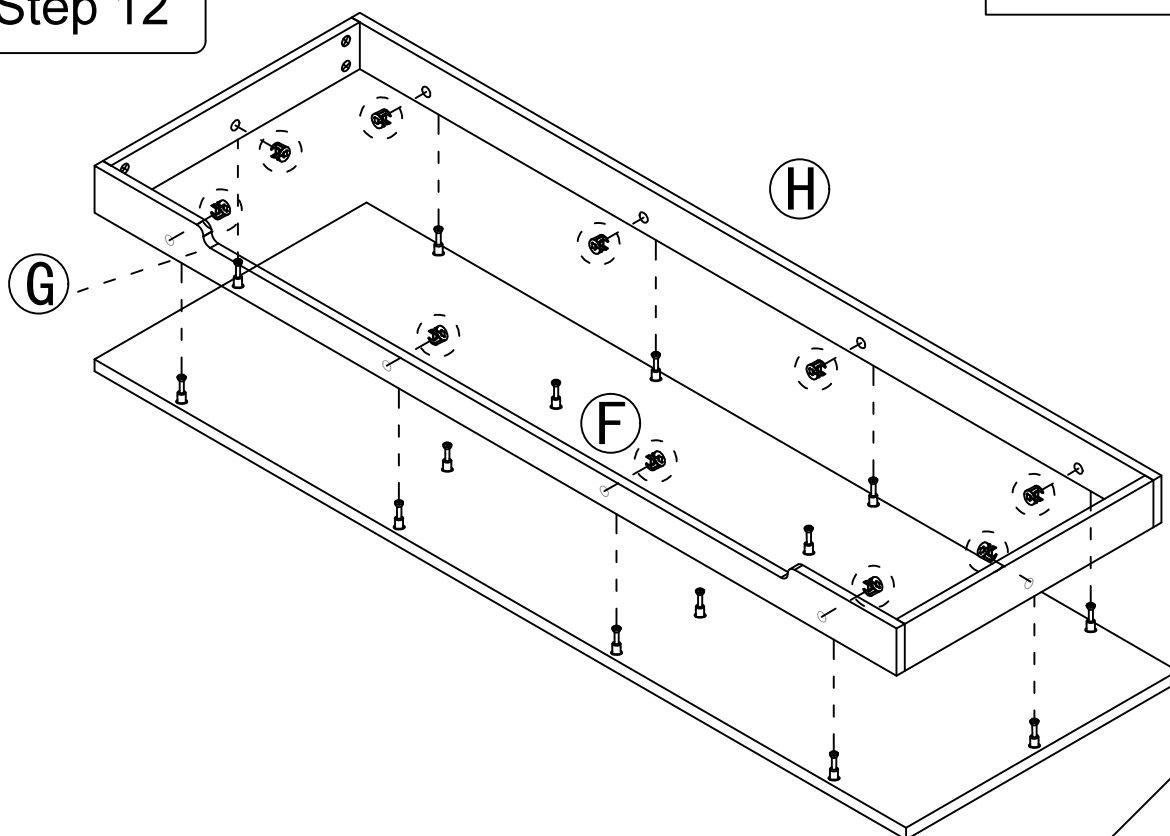


Step 13

②




x4

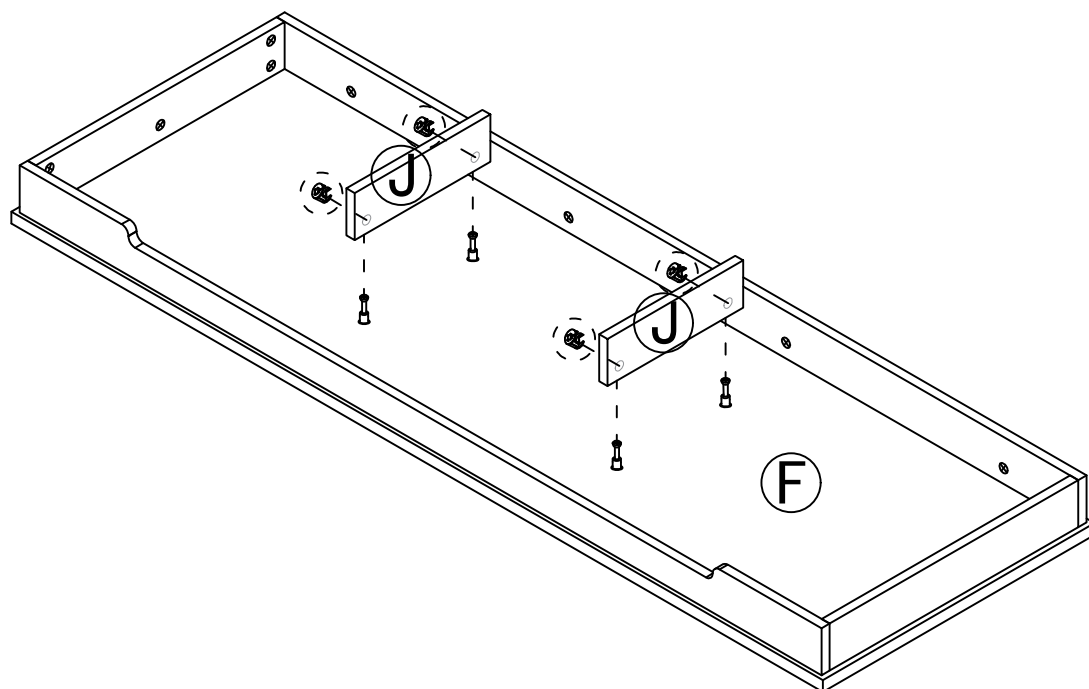


Step 14

⑤






x8



Tear off release paper and stick the black foot pad on the board

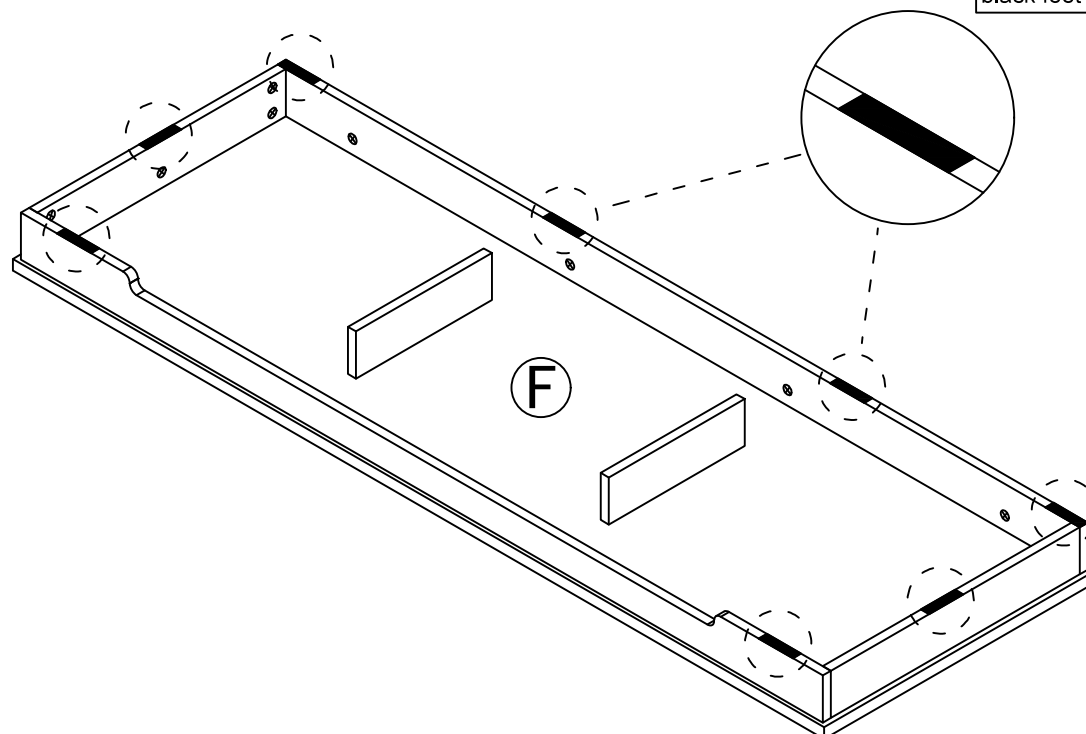



Step 15

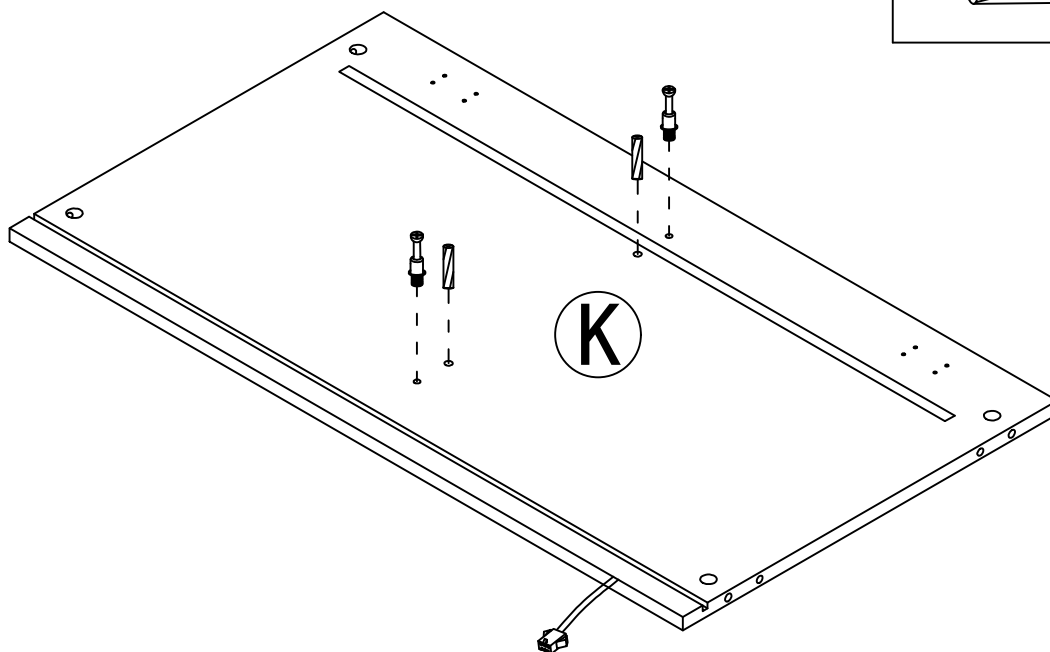



Step 16

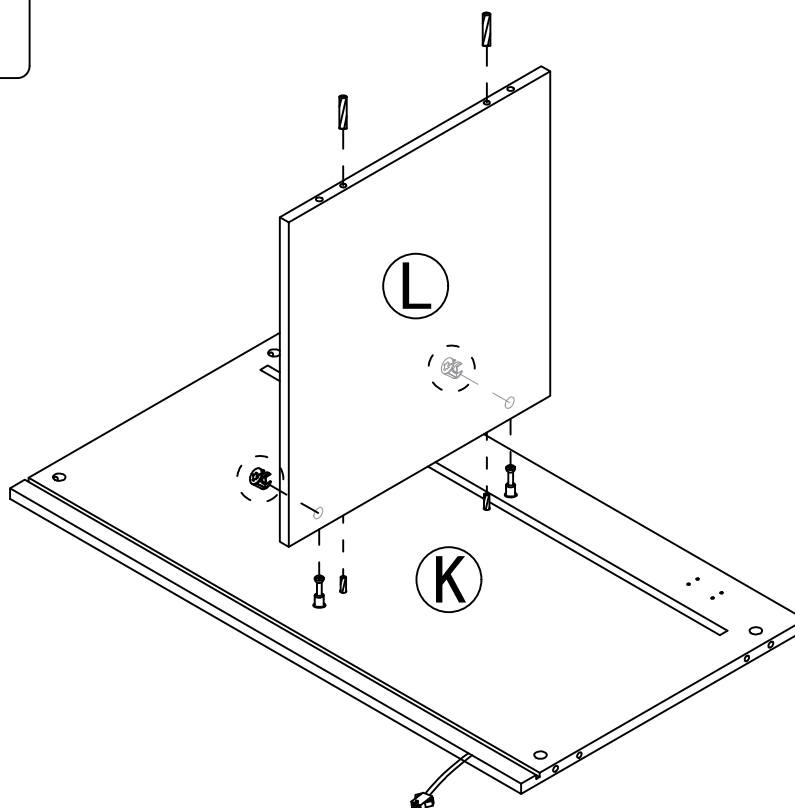

Step 17

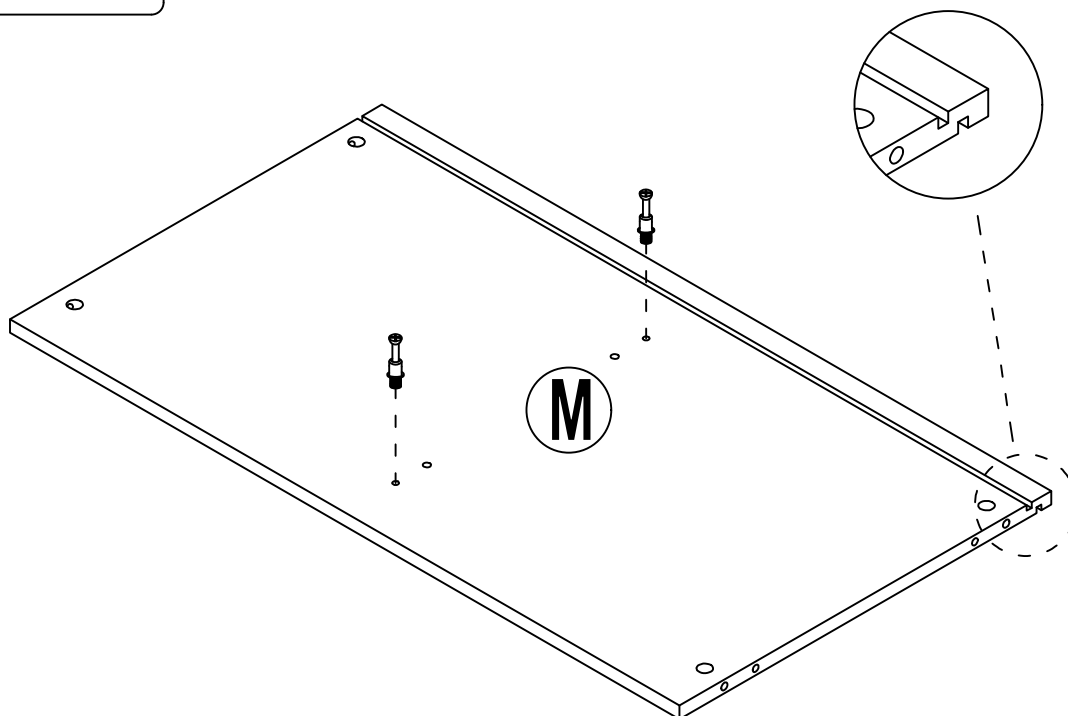

Step 18

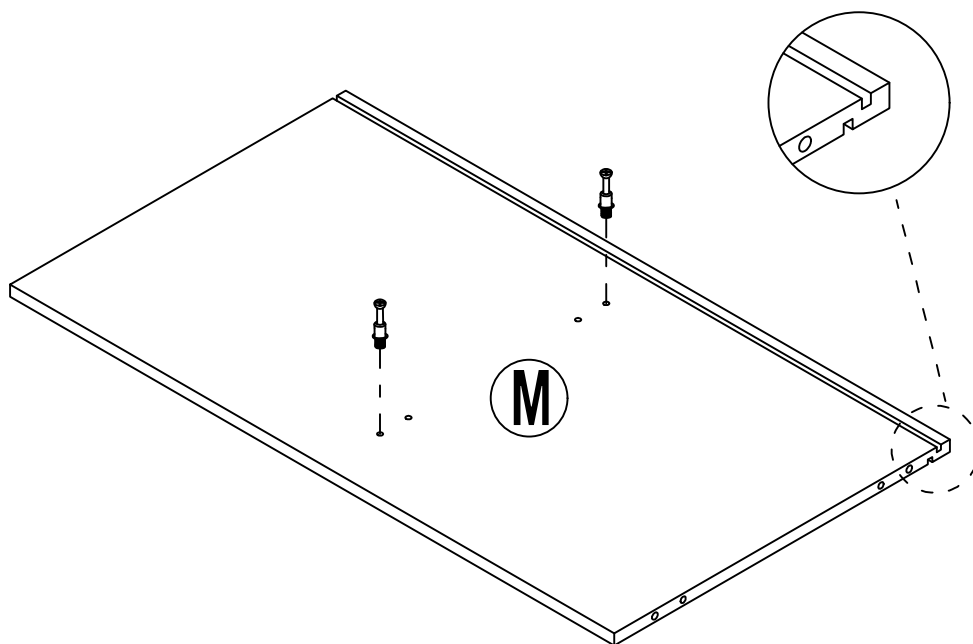


Step 19

②




x2

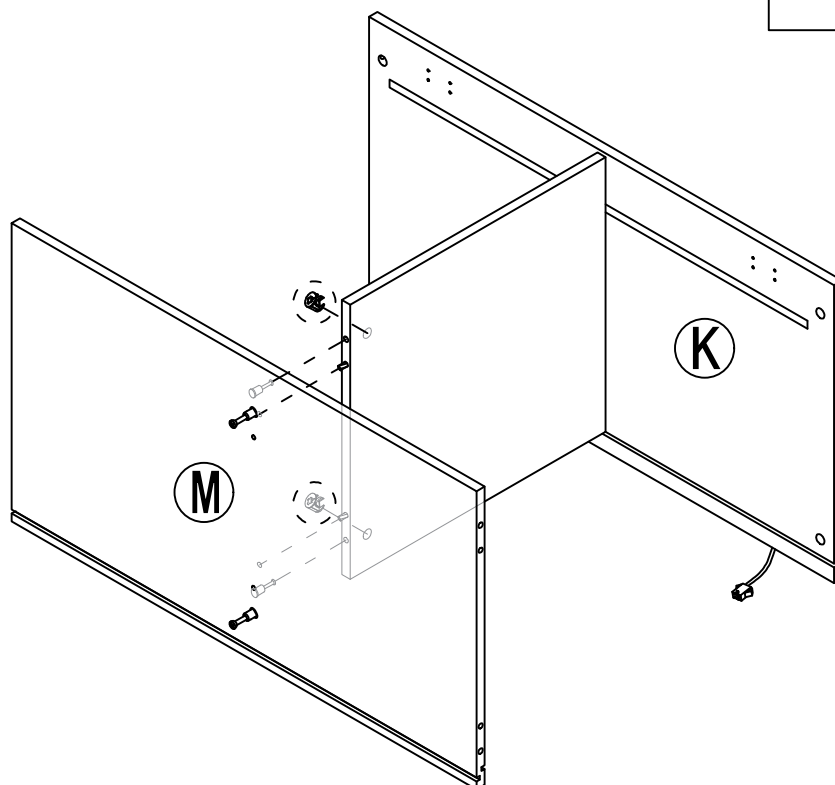


Step 20


④

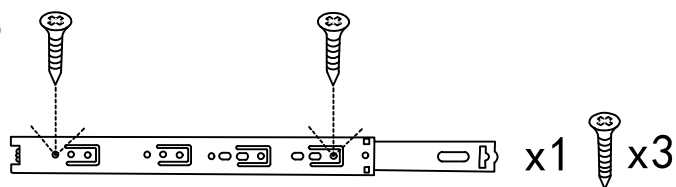

①





x2

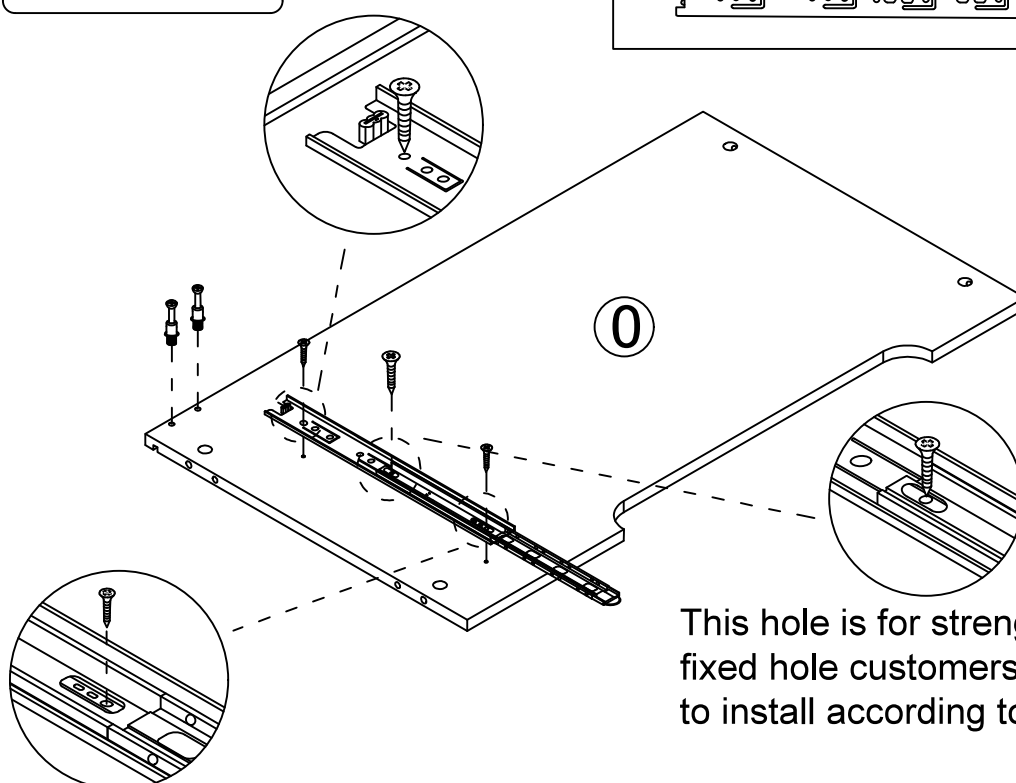


This hole is for strengthening
fixed hole customers can choose
to install according to their needs.


Step 21

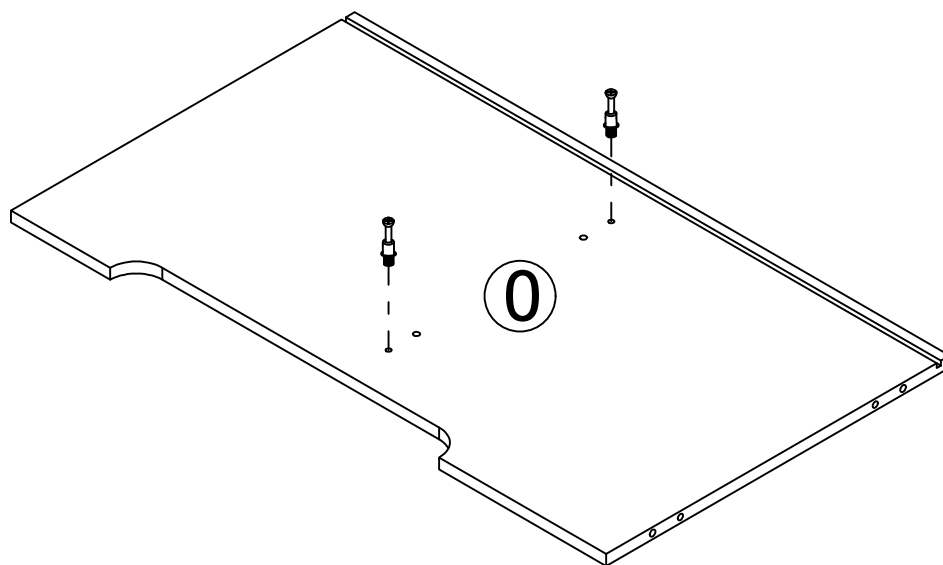


Step 22

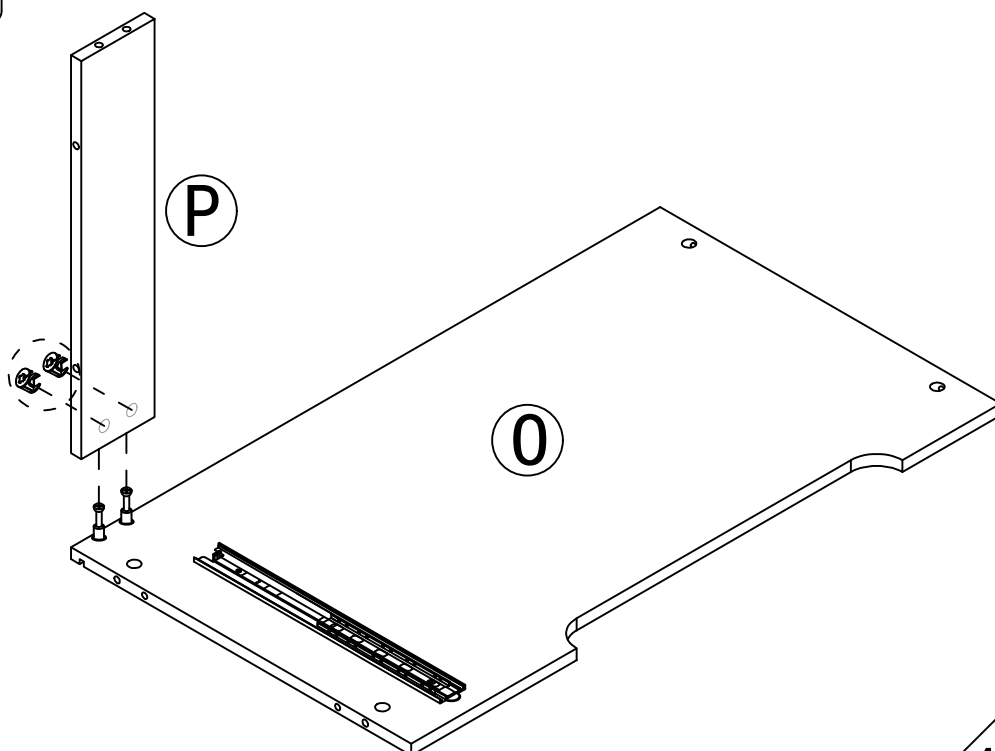

Step 23

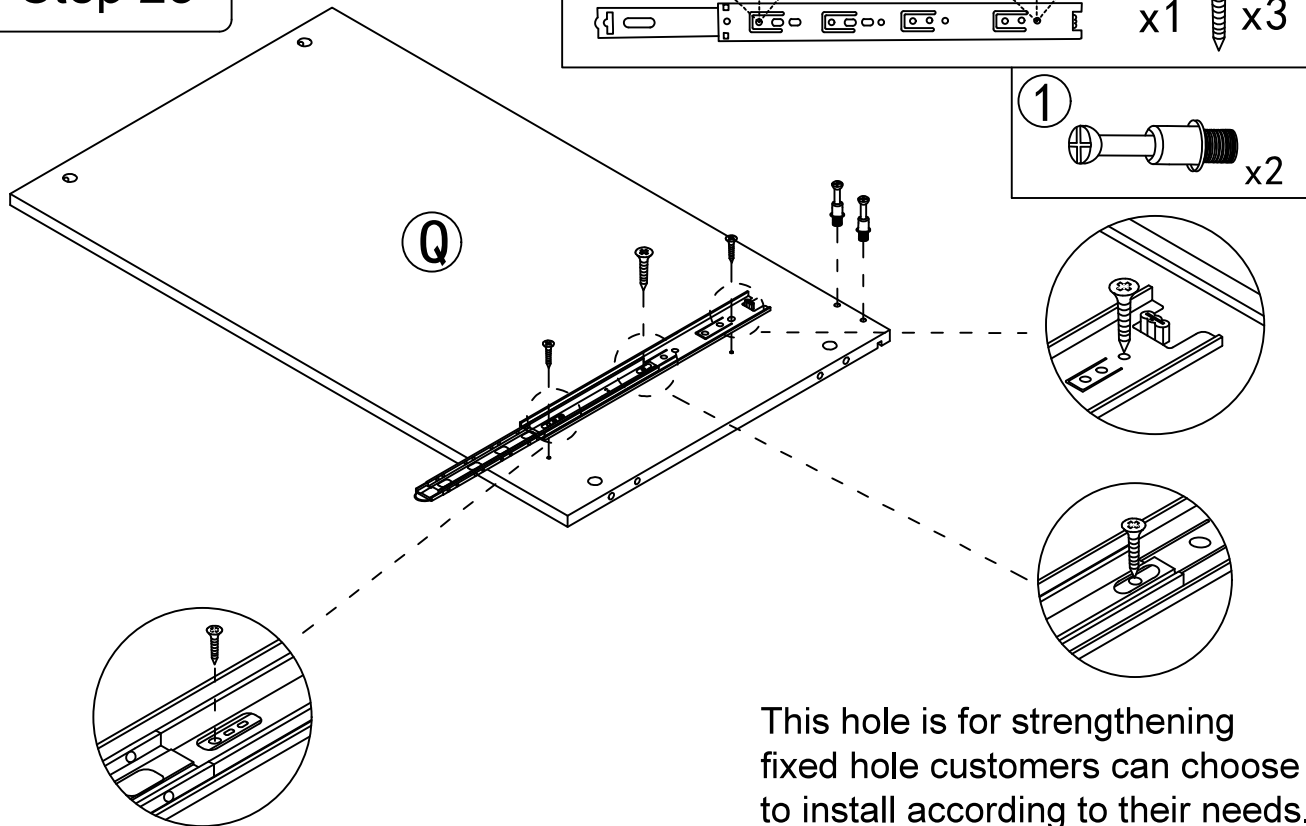

Step 24

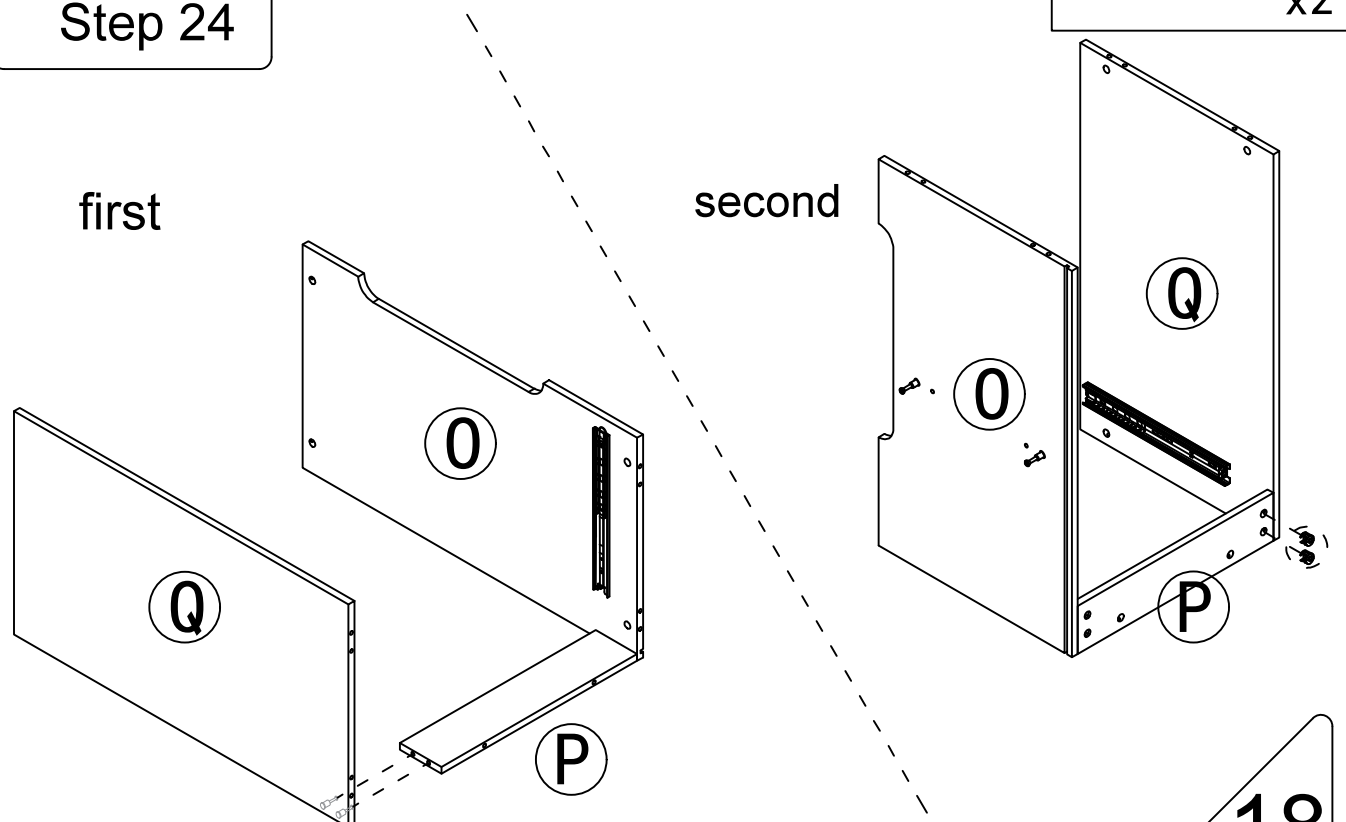


Step 25

③



x4

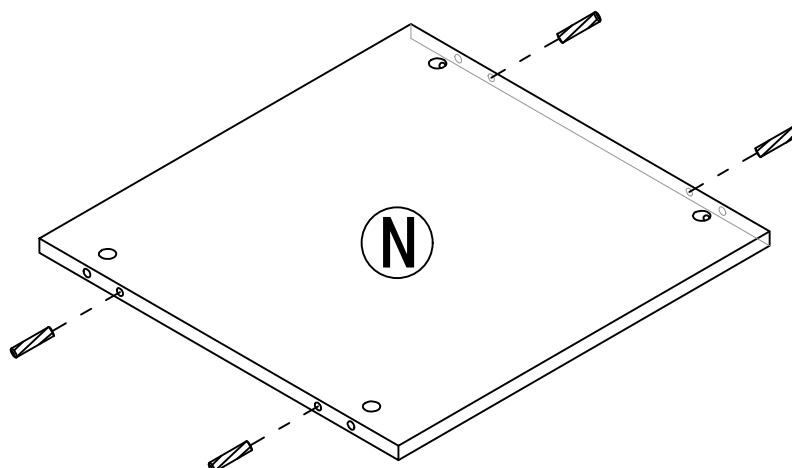


Step 26

②



x2

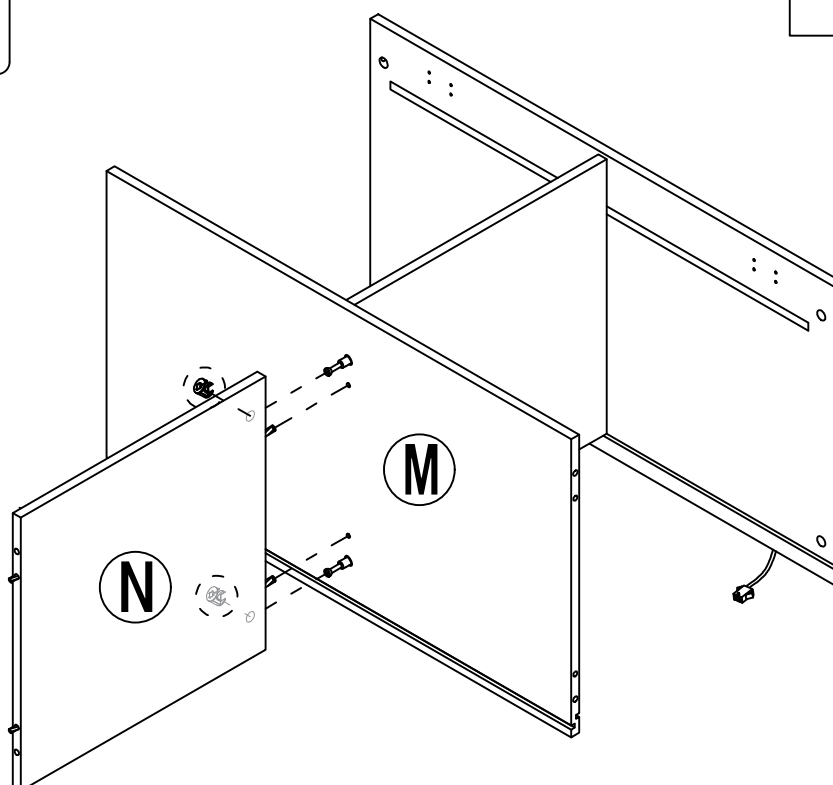


Step 27

②




x2

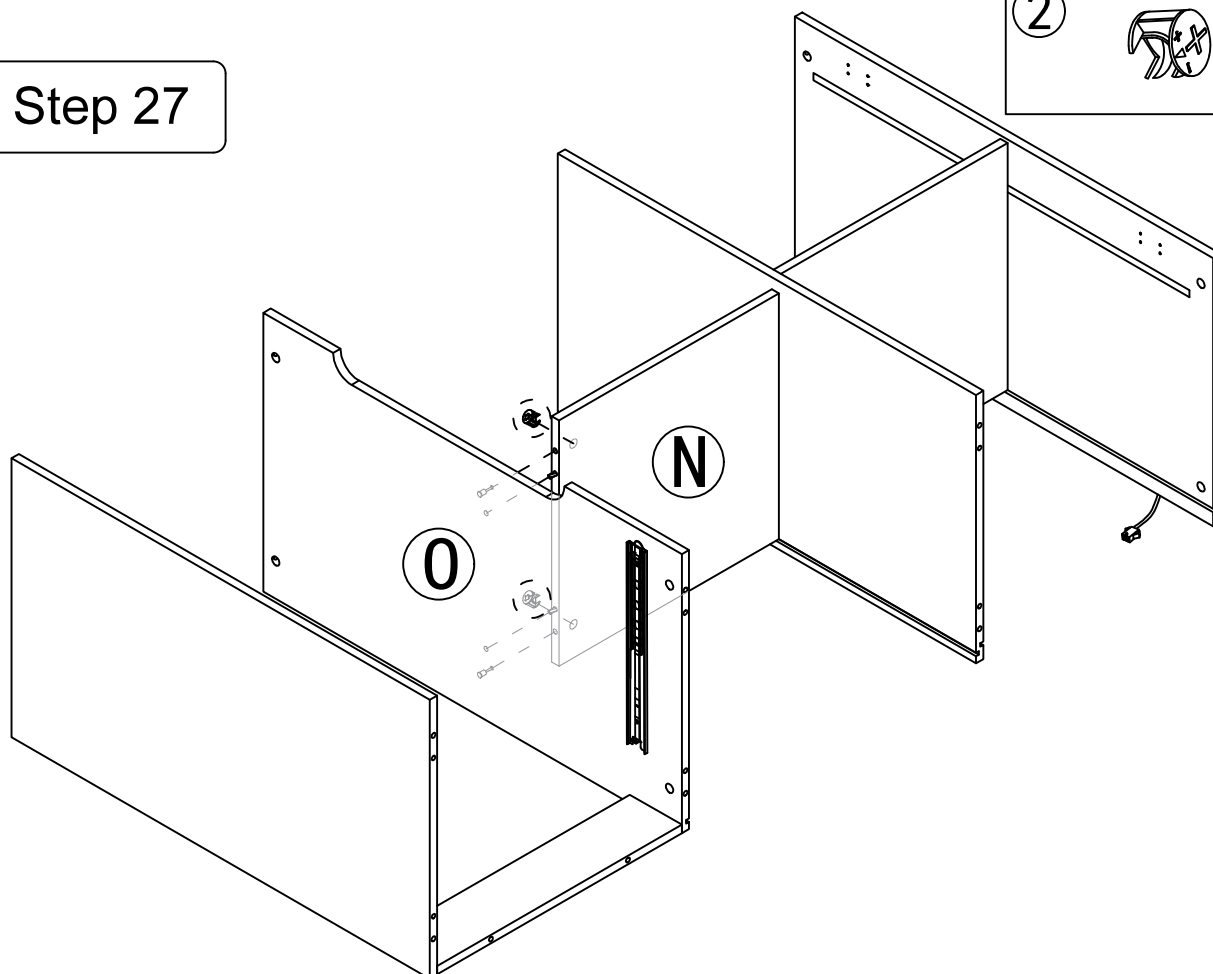


Step 28

①




x8

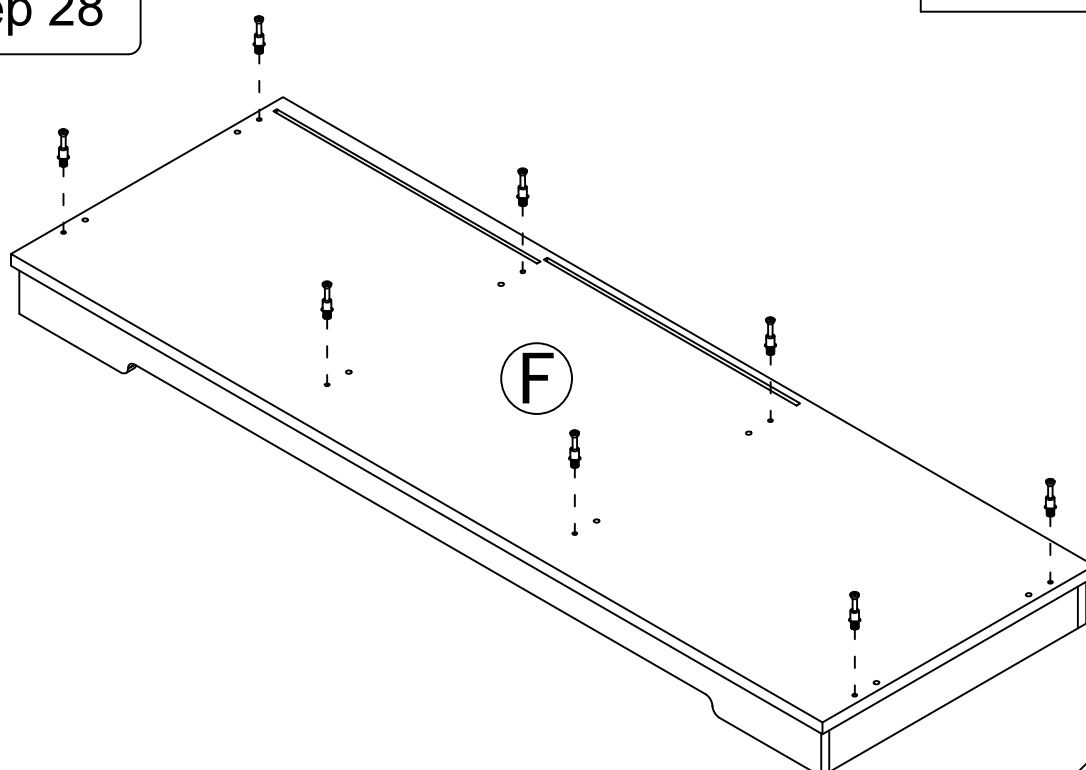


20

Step 29

3



x8

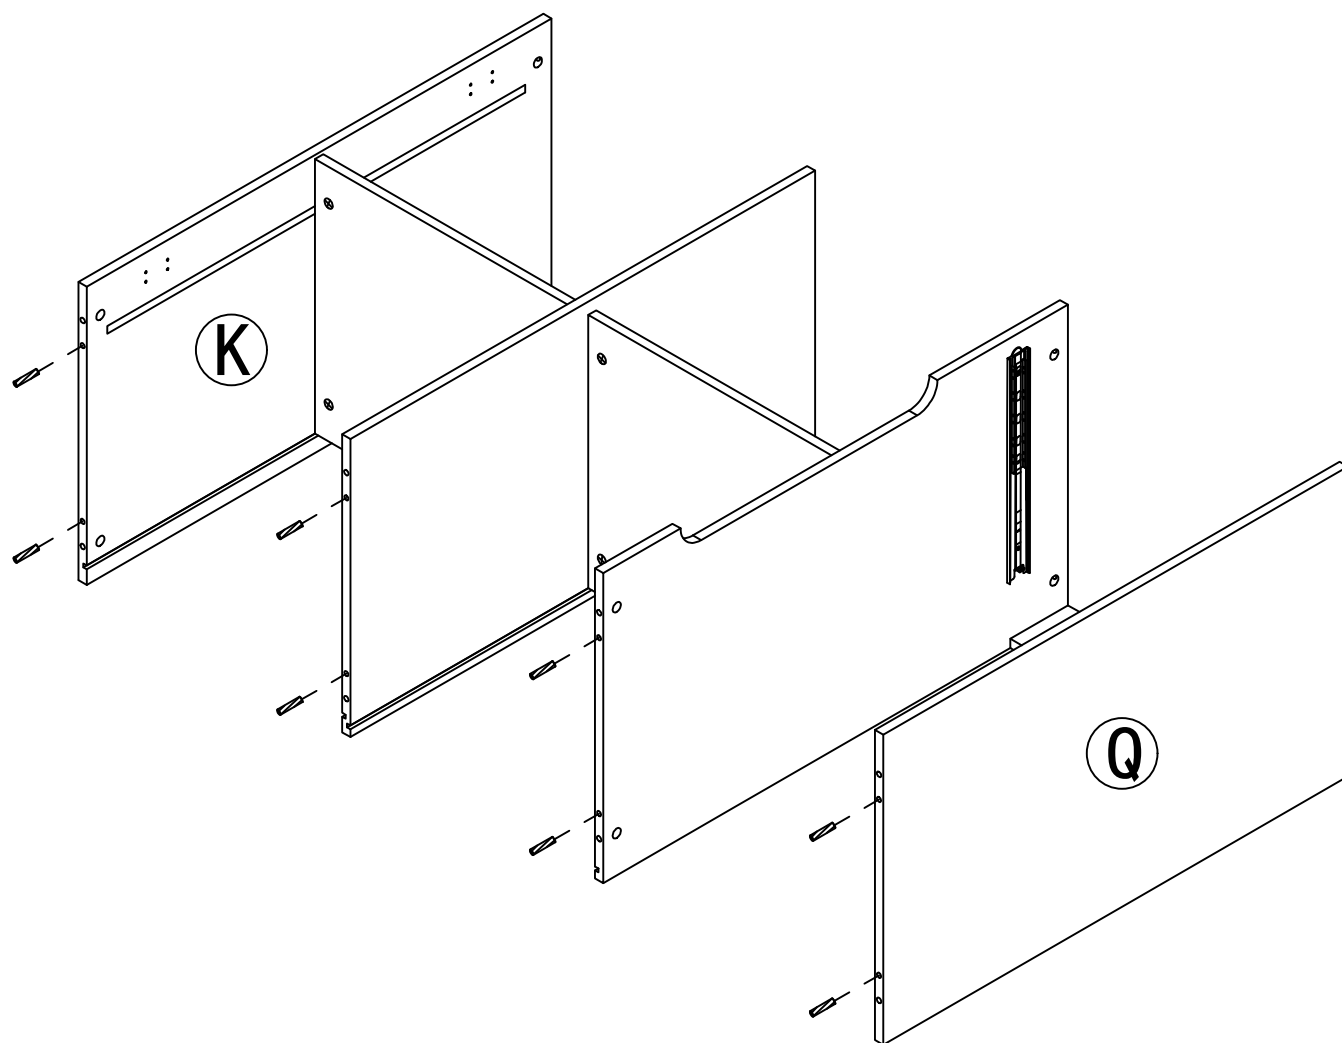


Step 30

2




x8

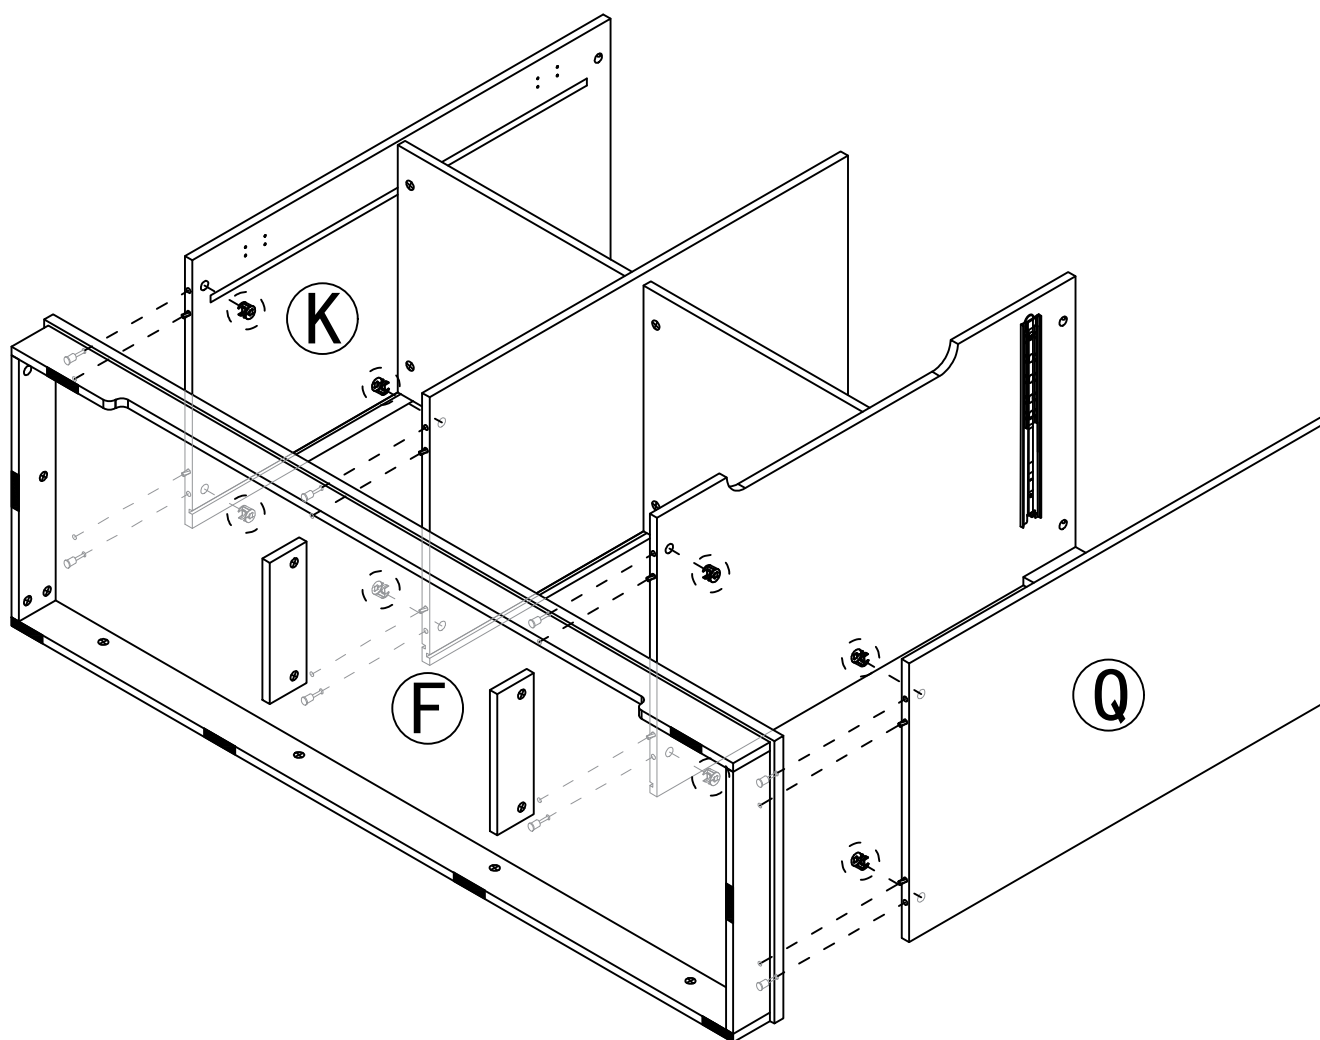


Step 31


③



x8


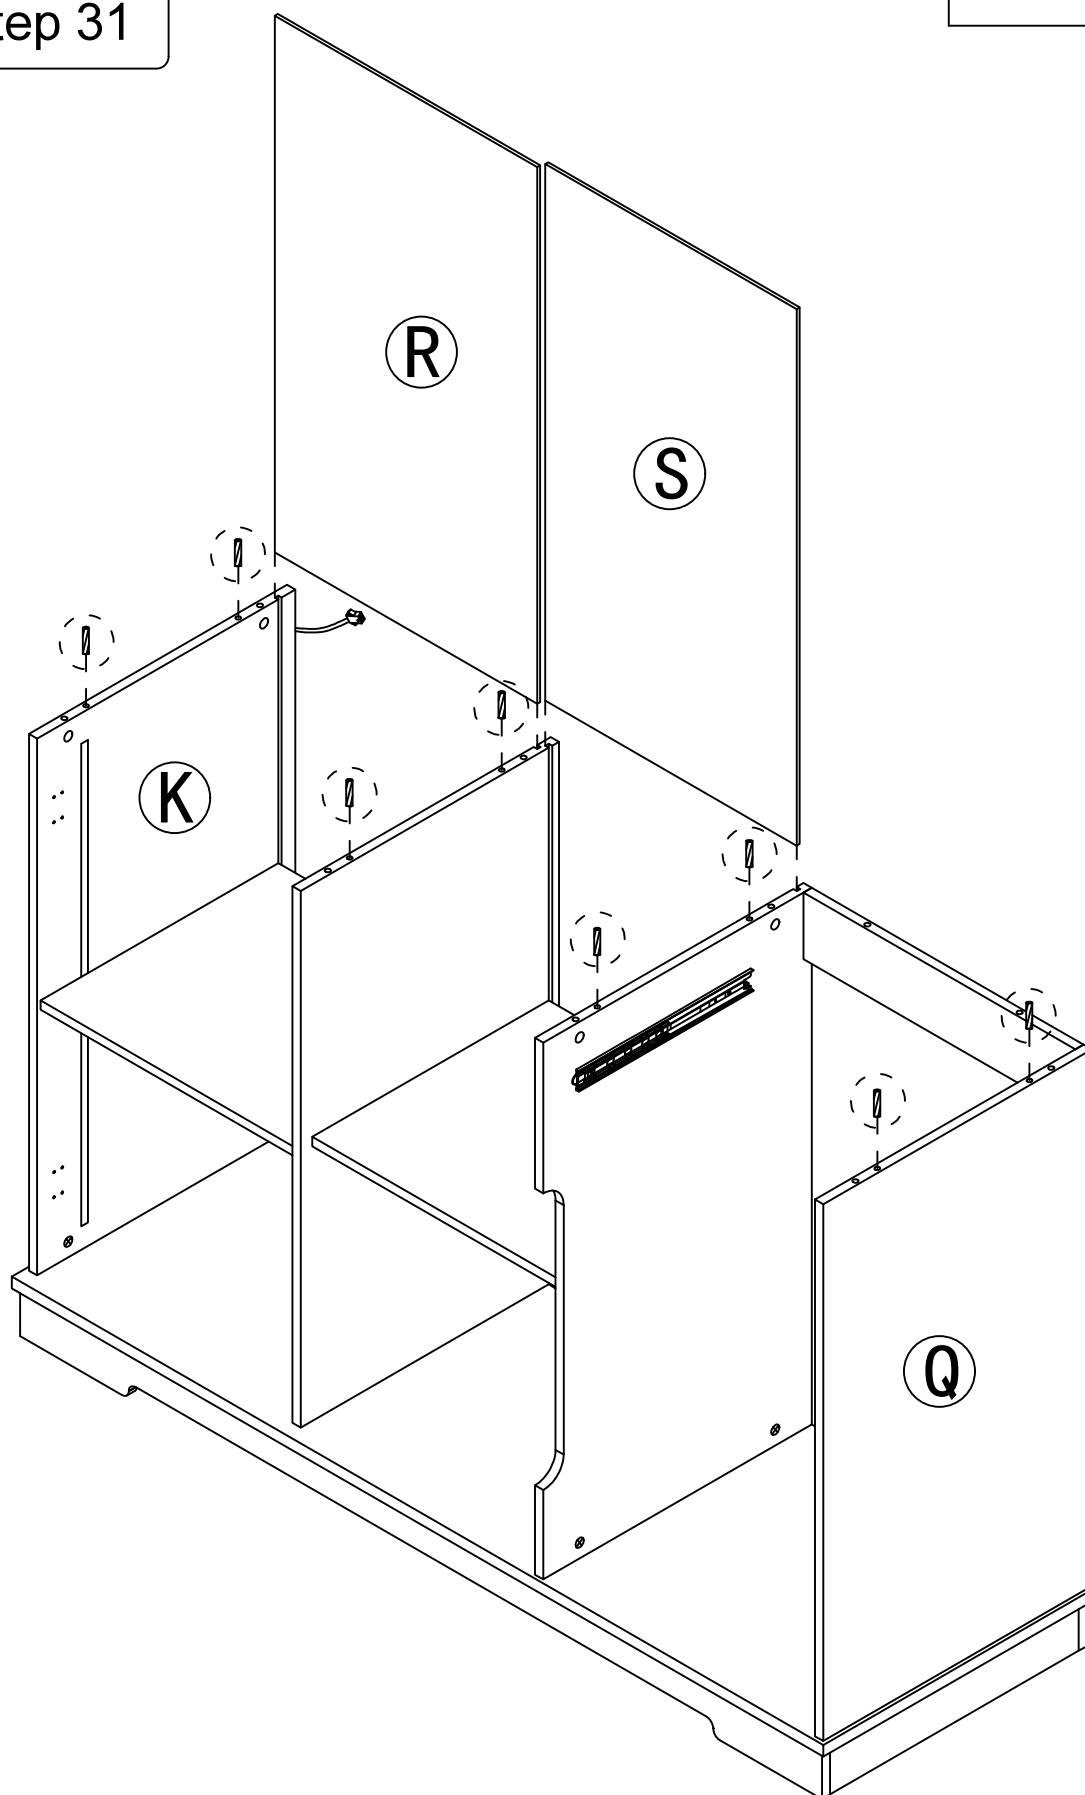


Step 32

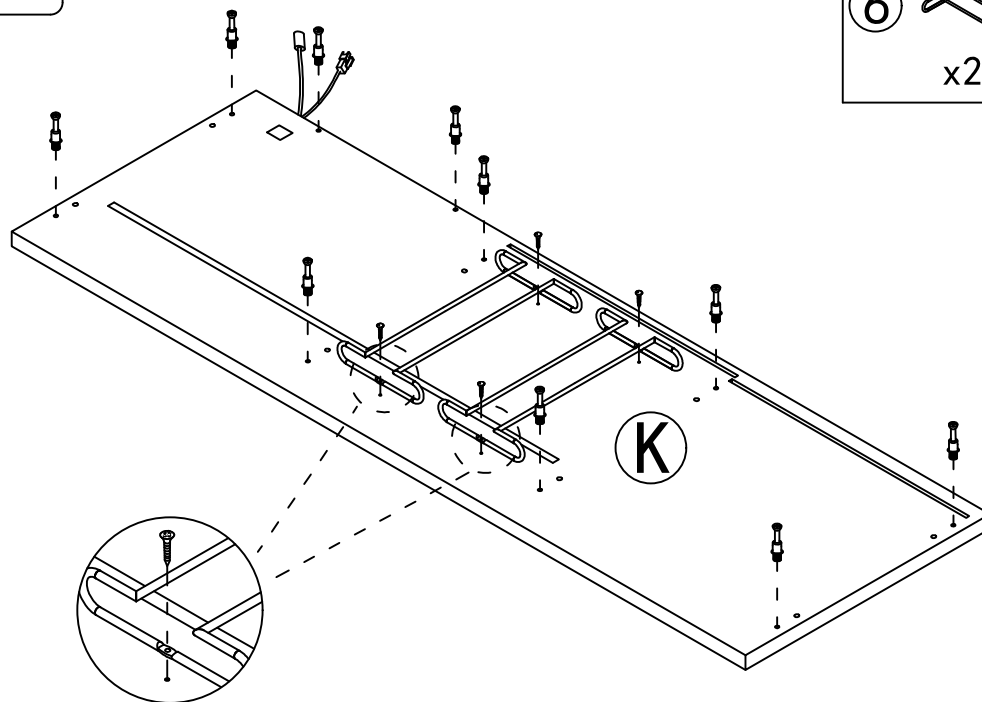

- | | | |
|---|--|-----|
| ① | | x10 |
| ⑥ | | x2 |
| | | x4 |

Step 33

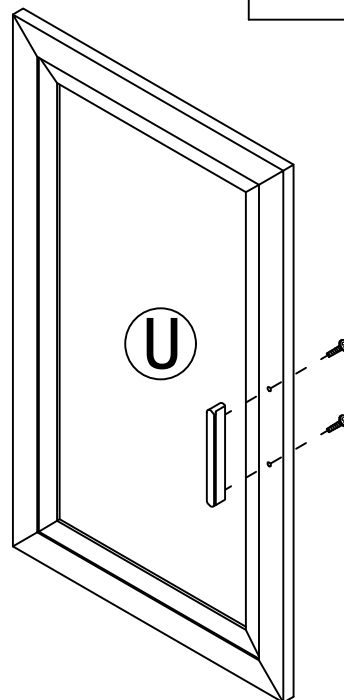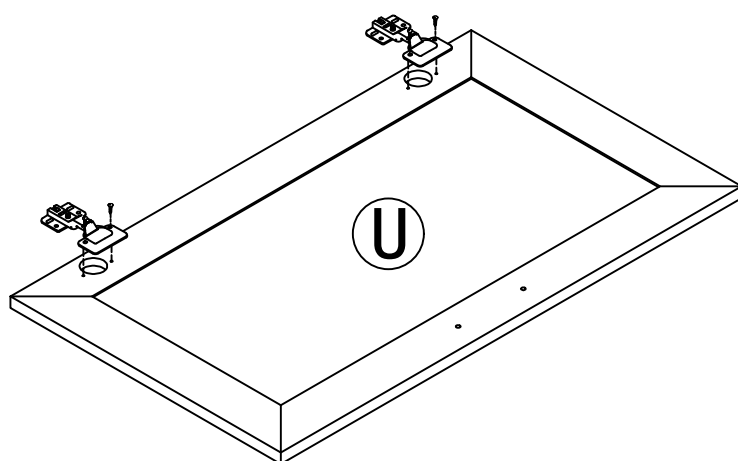


- | | | |
|---|--|----|
| ⑦ | | x2 |
| | | x4 |
| ⑧ | | x1 |
| | | x2 |

Step 34


②



x10

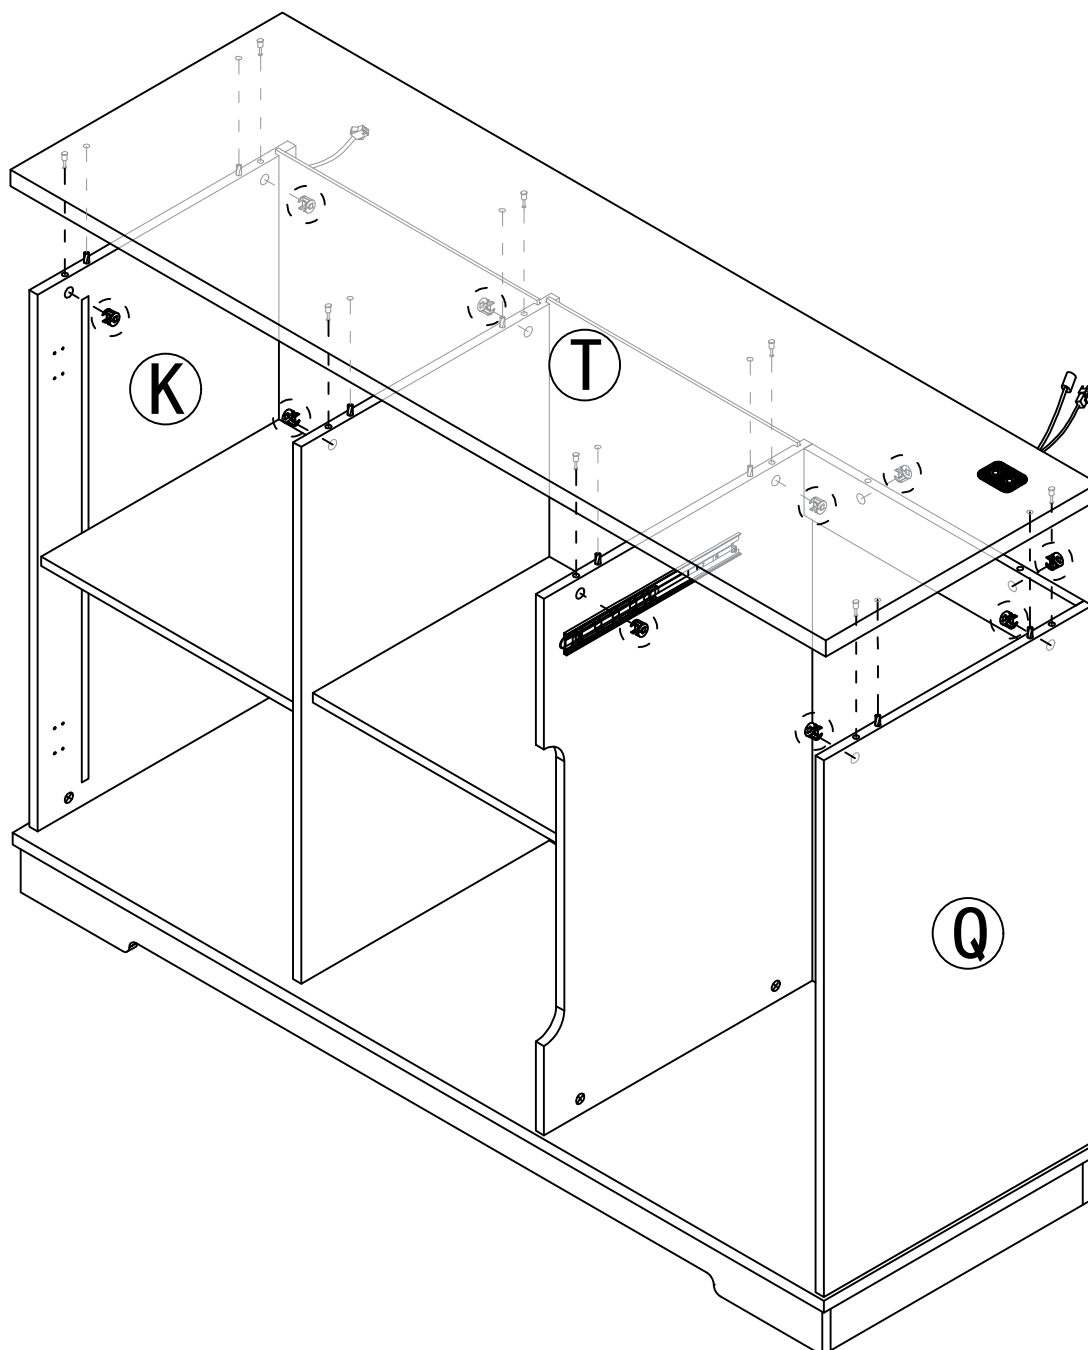


Step 35

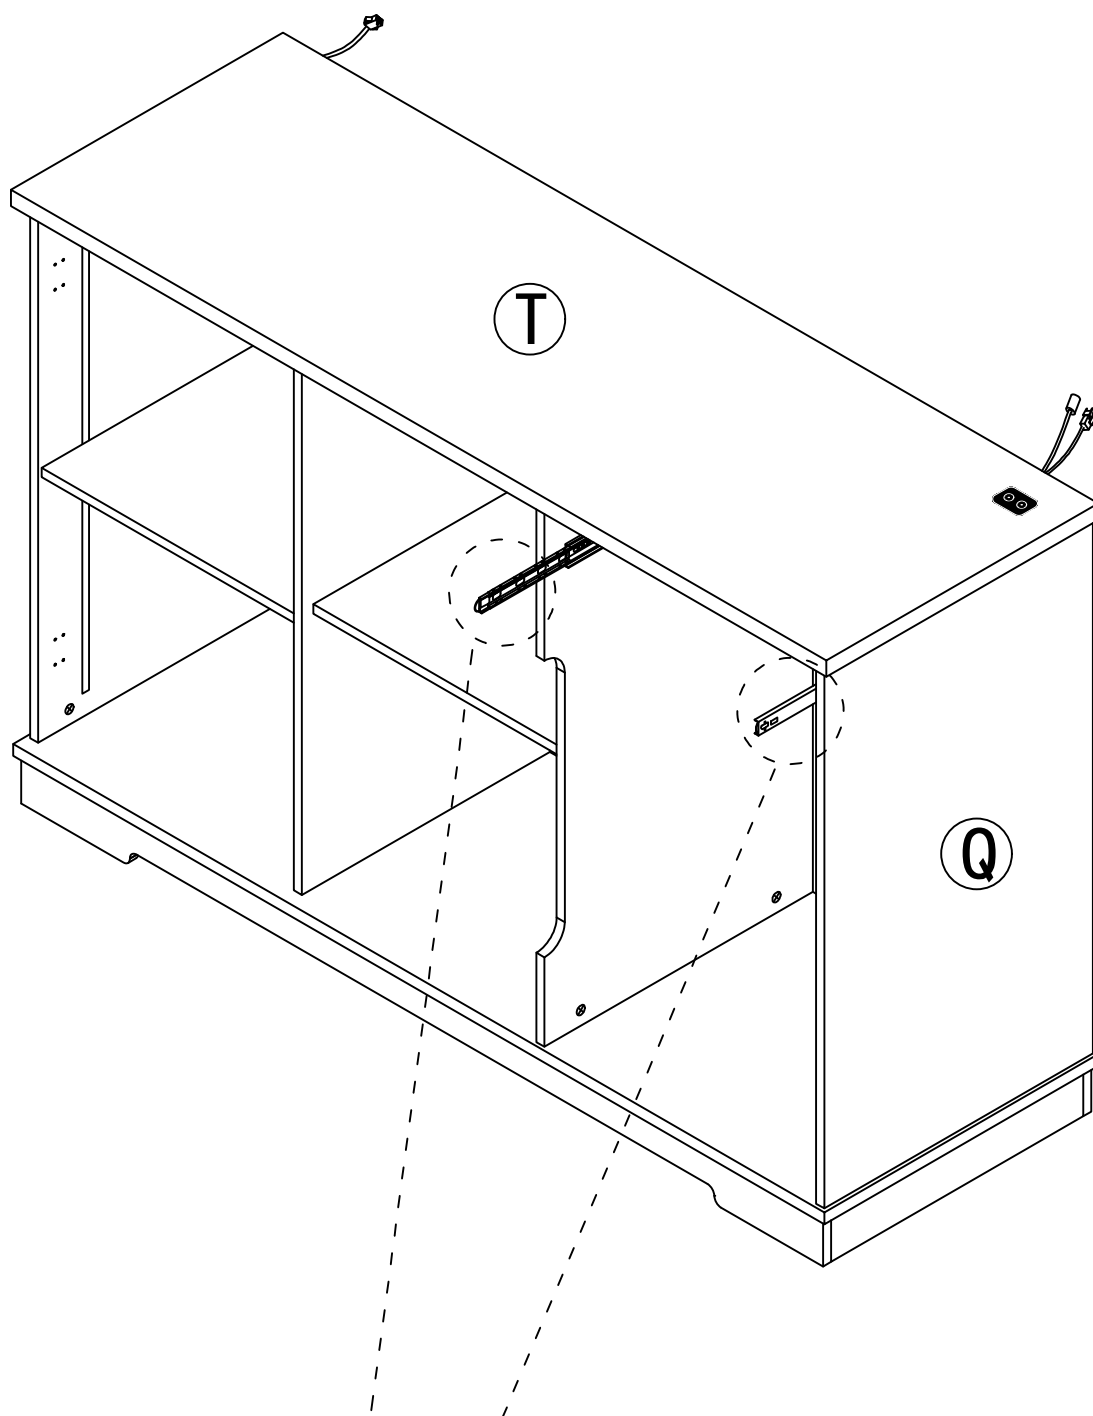

As shown, When installing the drawer,
pull the guide rail out first, Slide beads are also pulled out.

Step 36

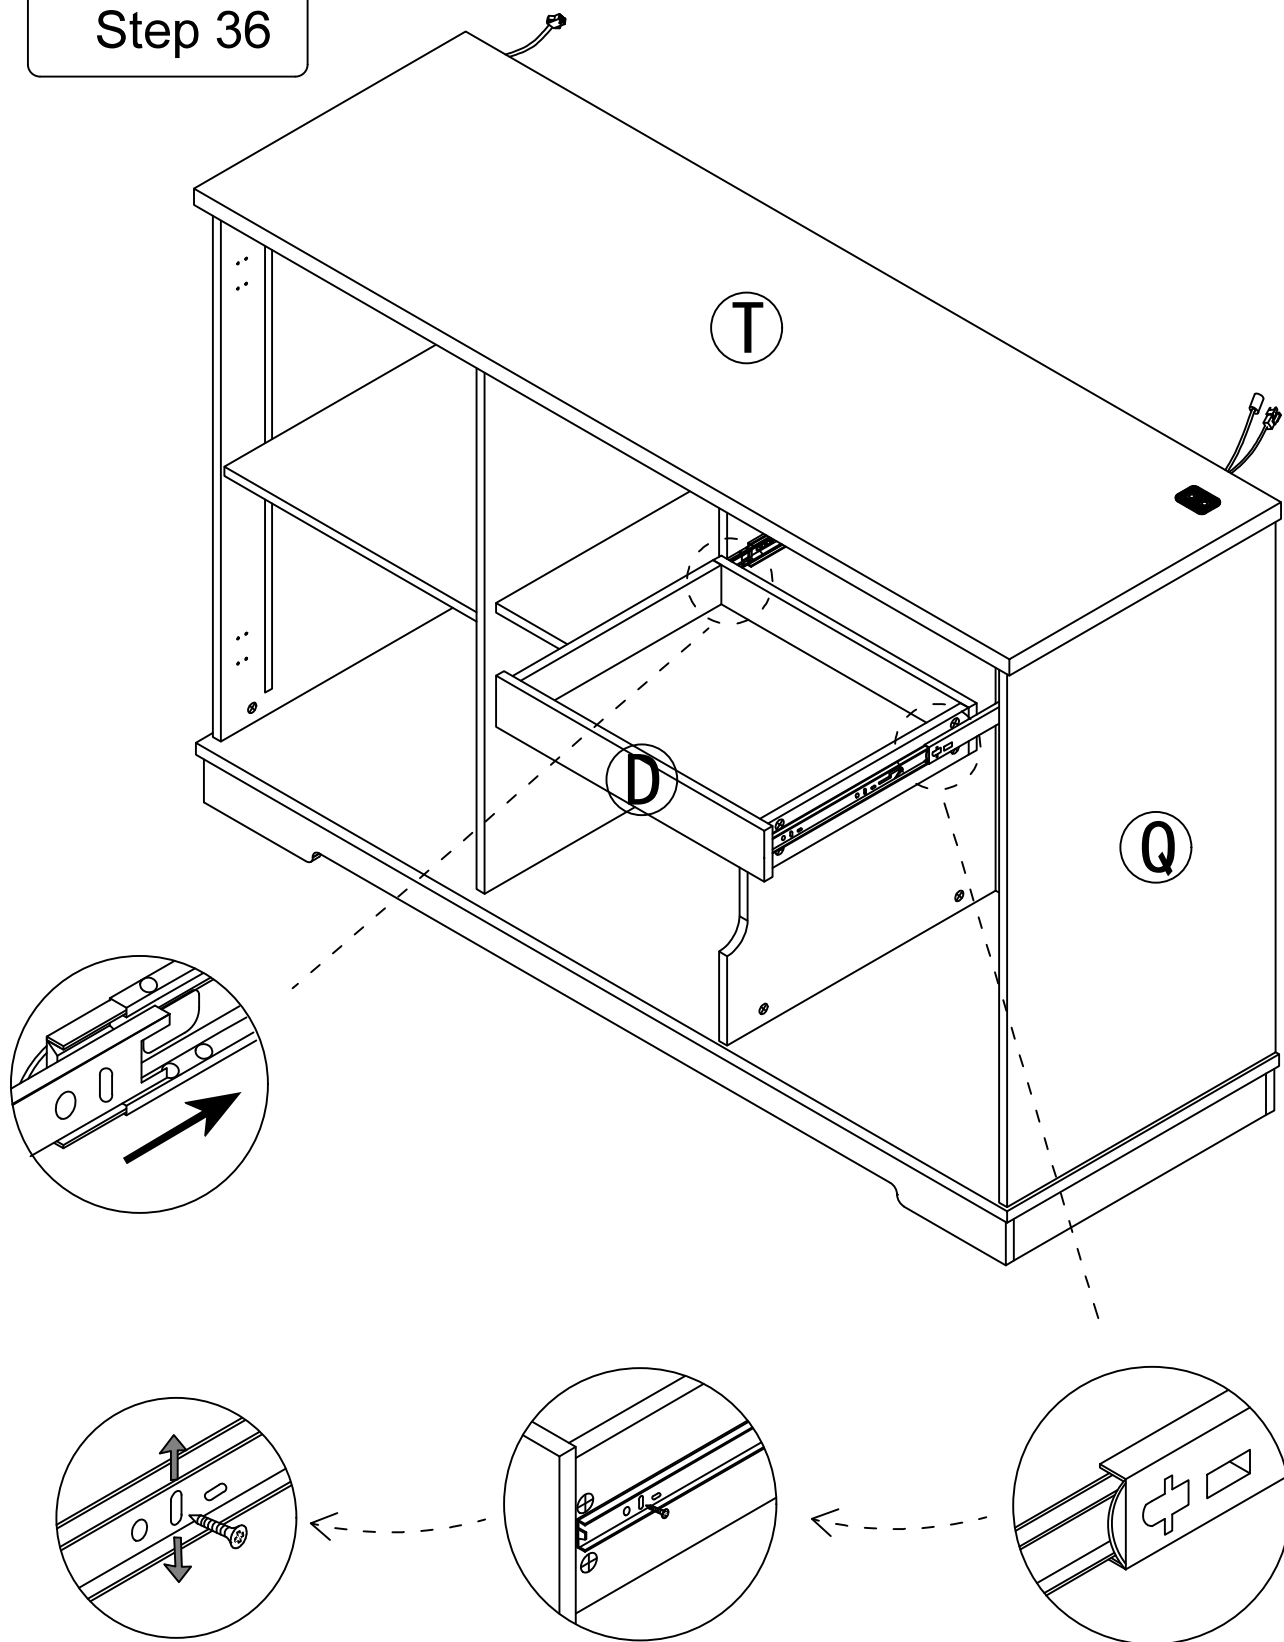



If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap

Step 37


7



x8

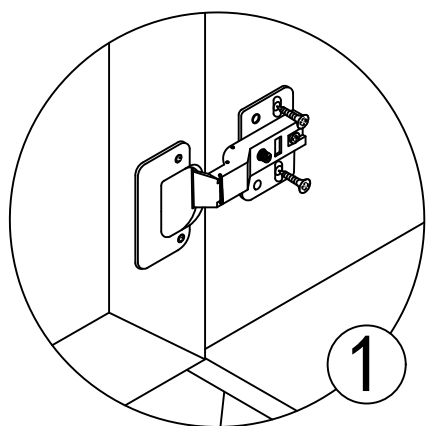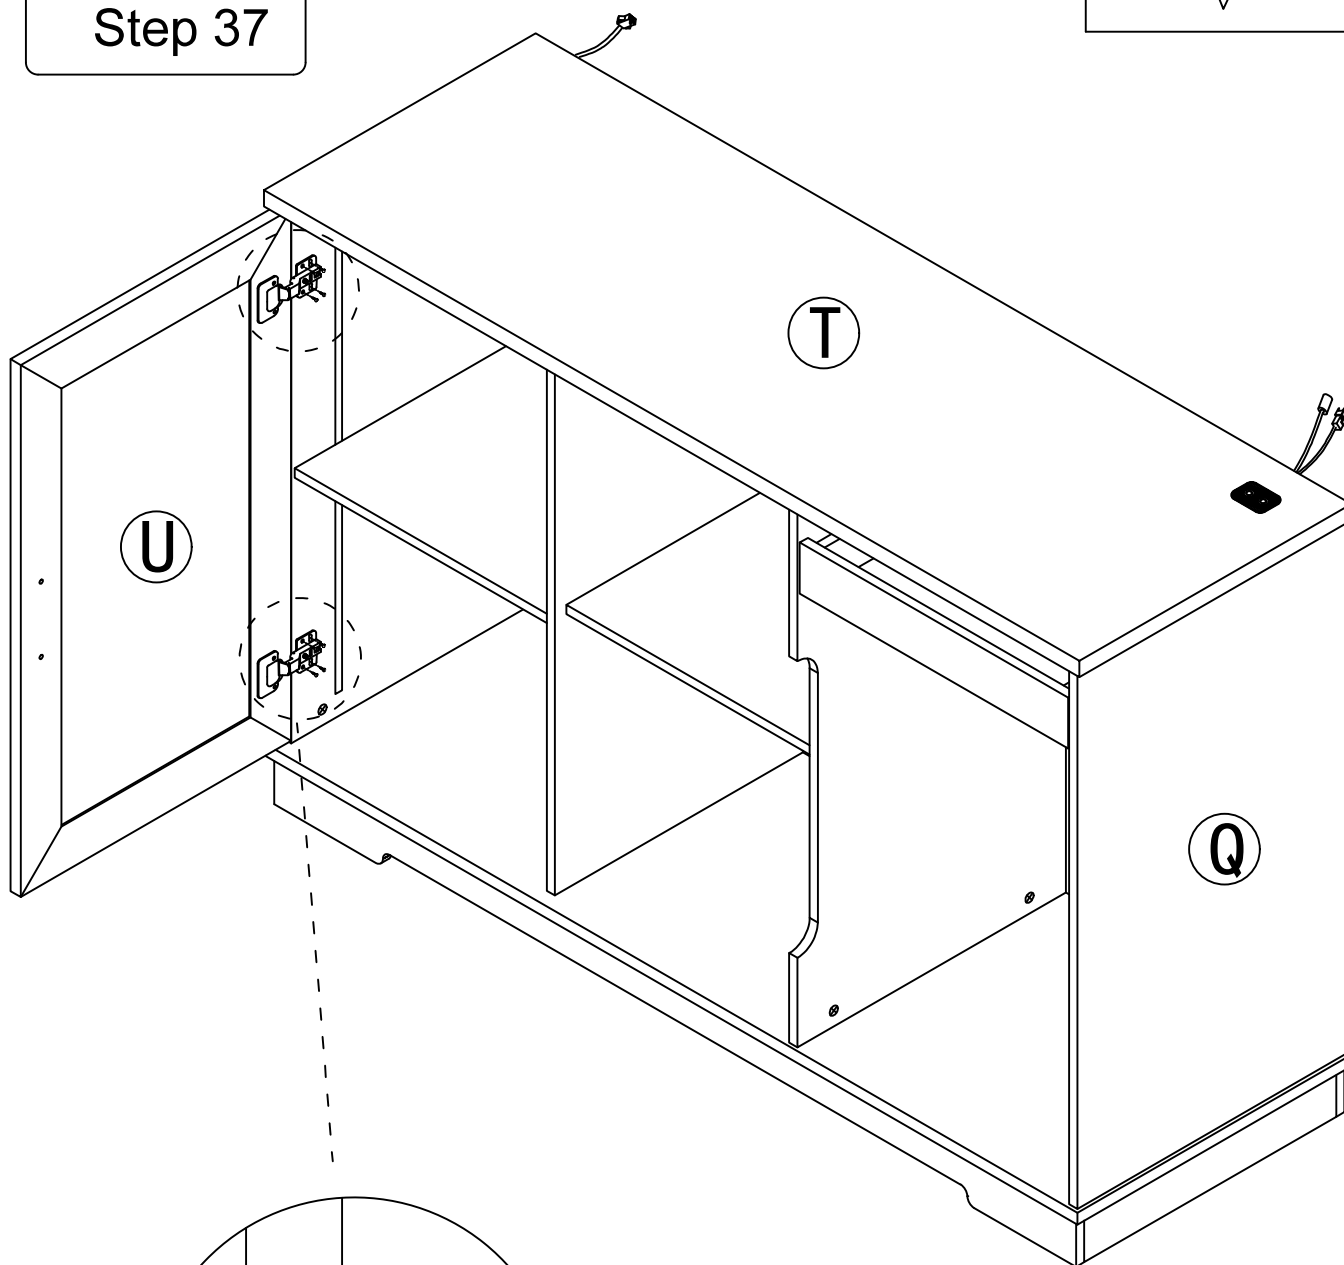


1

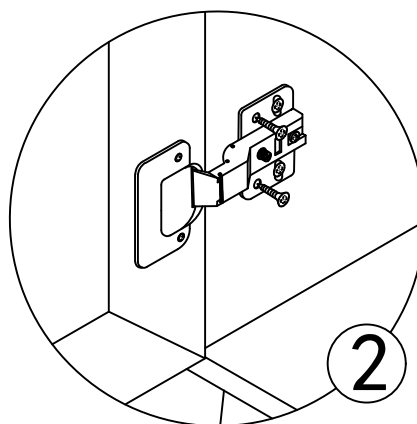


2

First lock the elliptical hole
then lock the fixed hole

Step 38

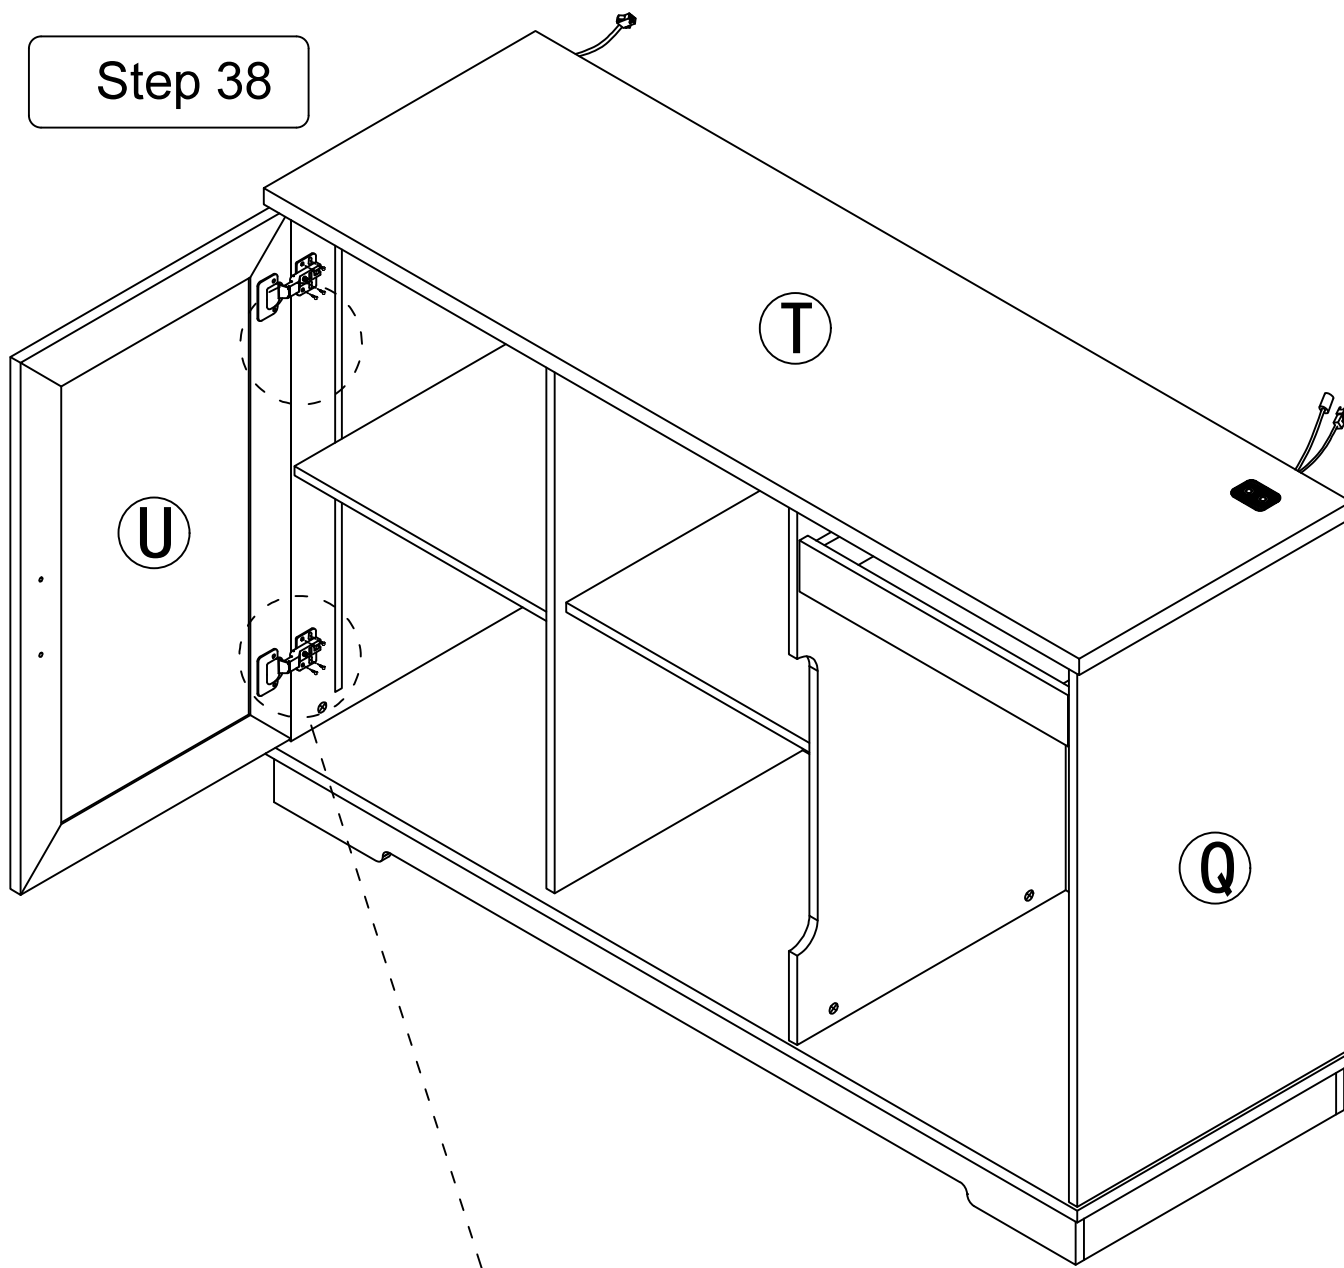


Turning this screw can effectively adjust the size of the door gap.

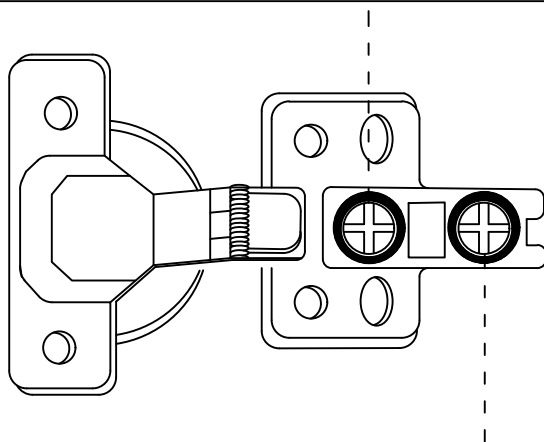


Turn this screw to adjust the door panel to be flat with the side panel.


Step 39

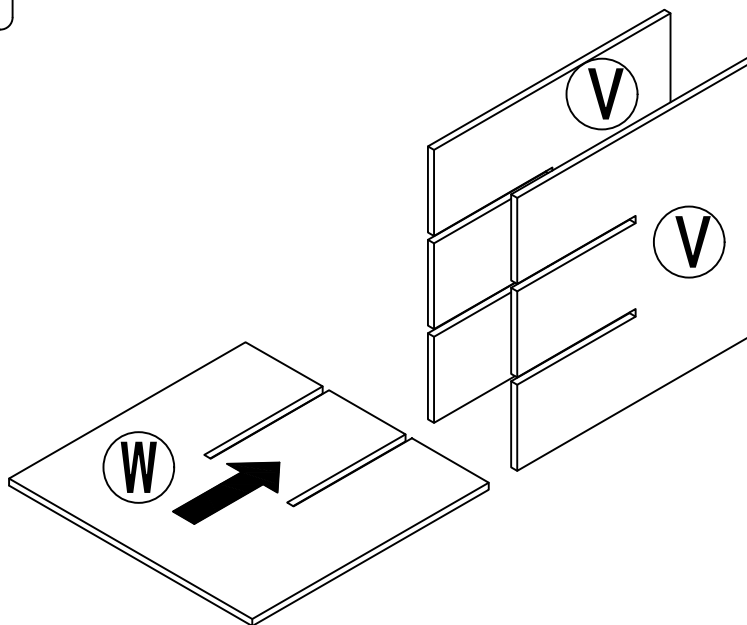

Step 40

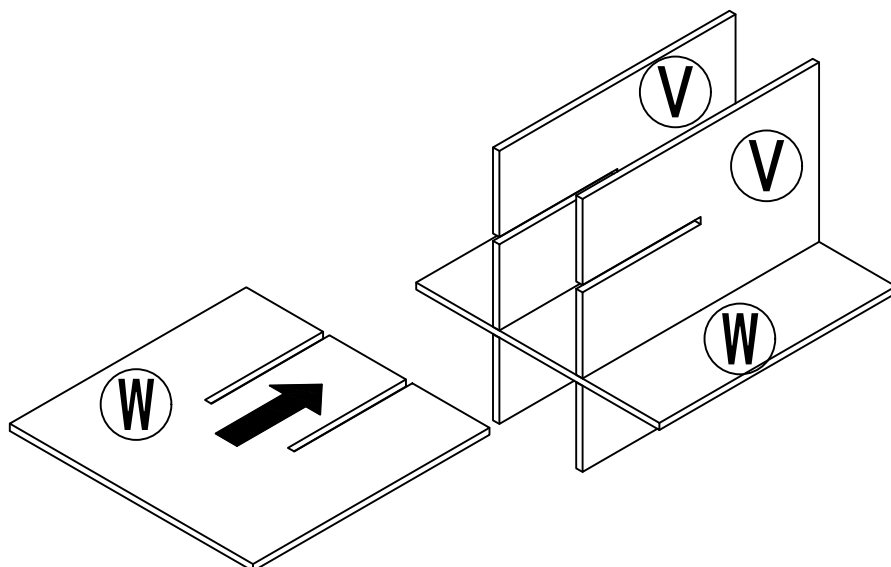


Step 41

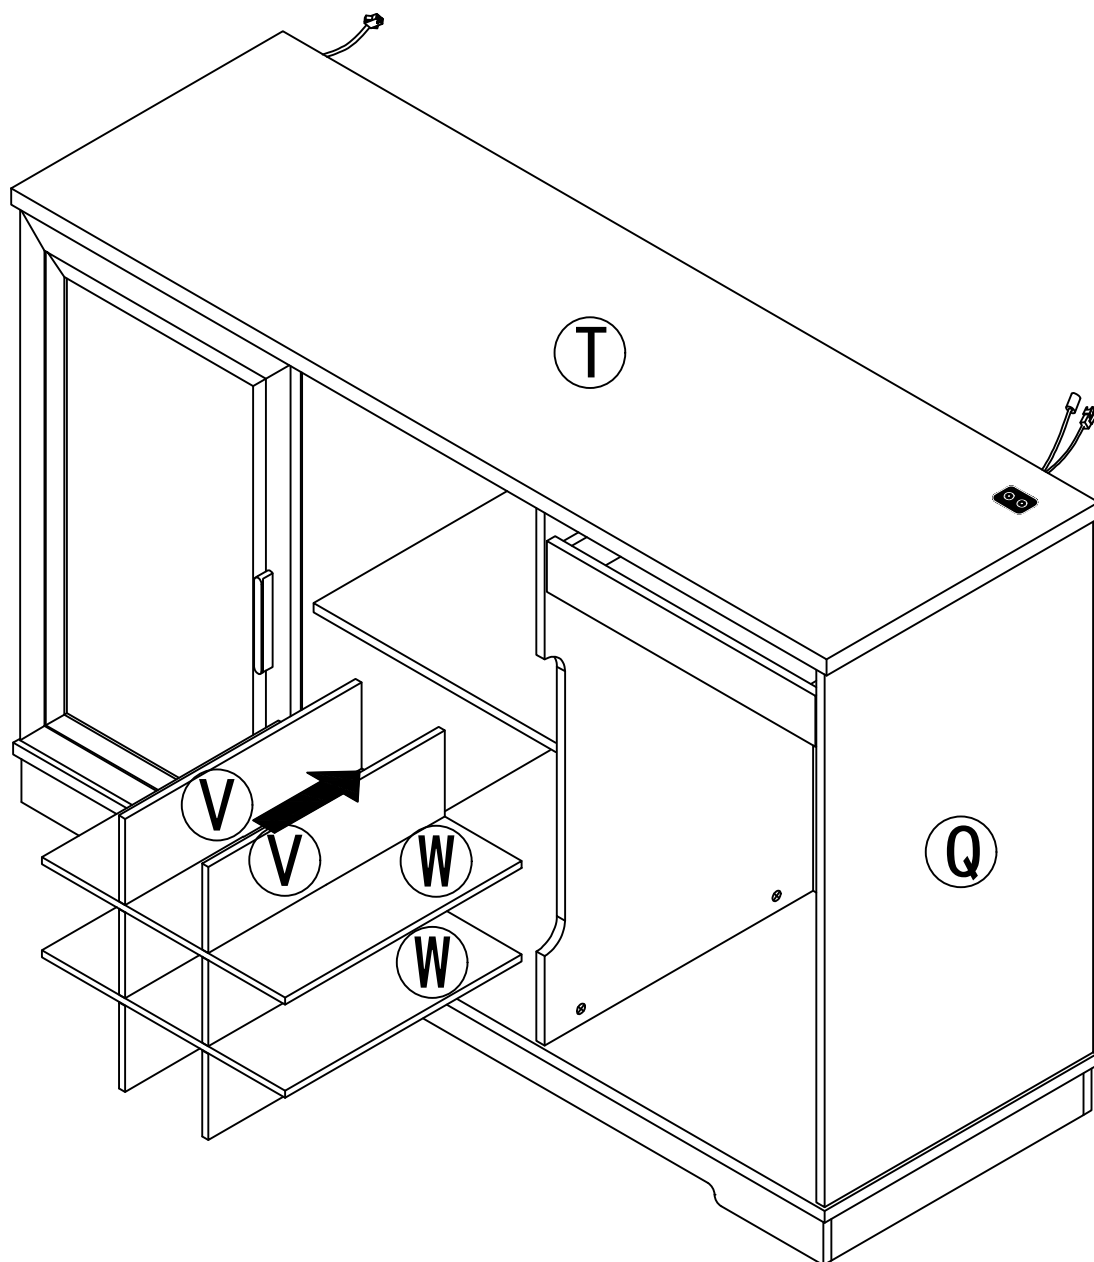


Step 42



9



x8

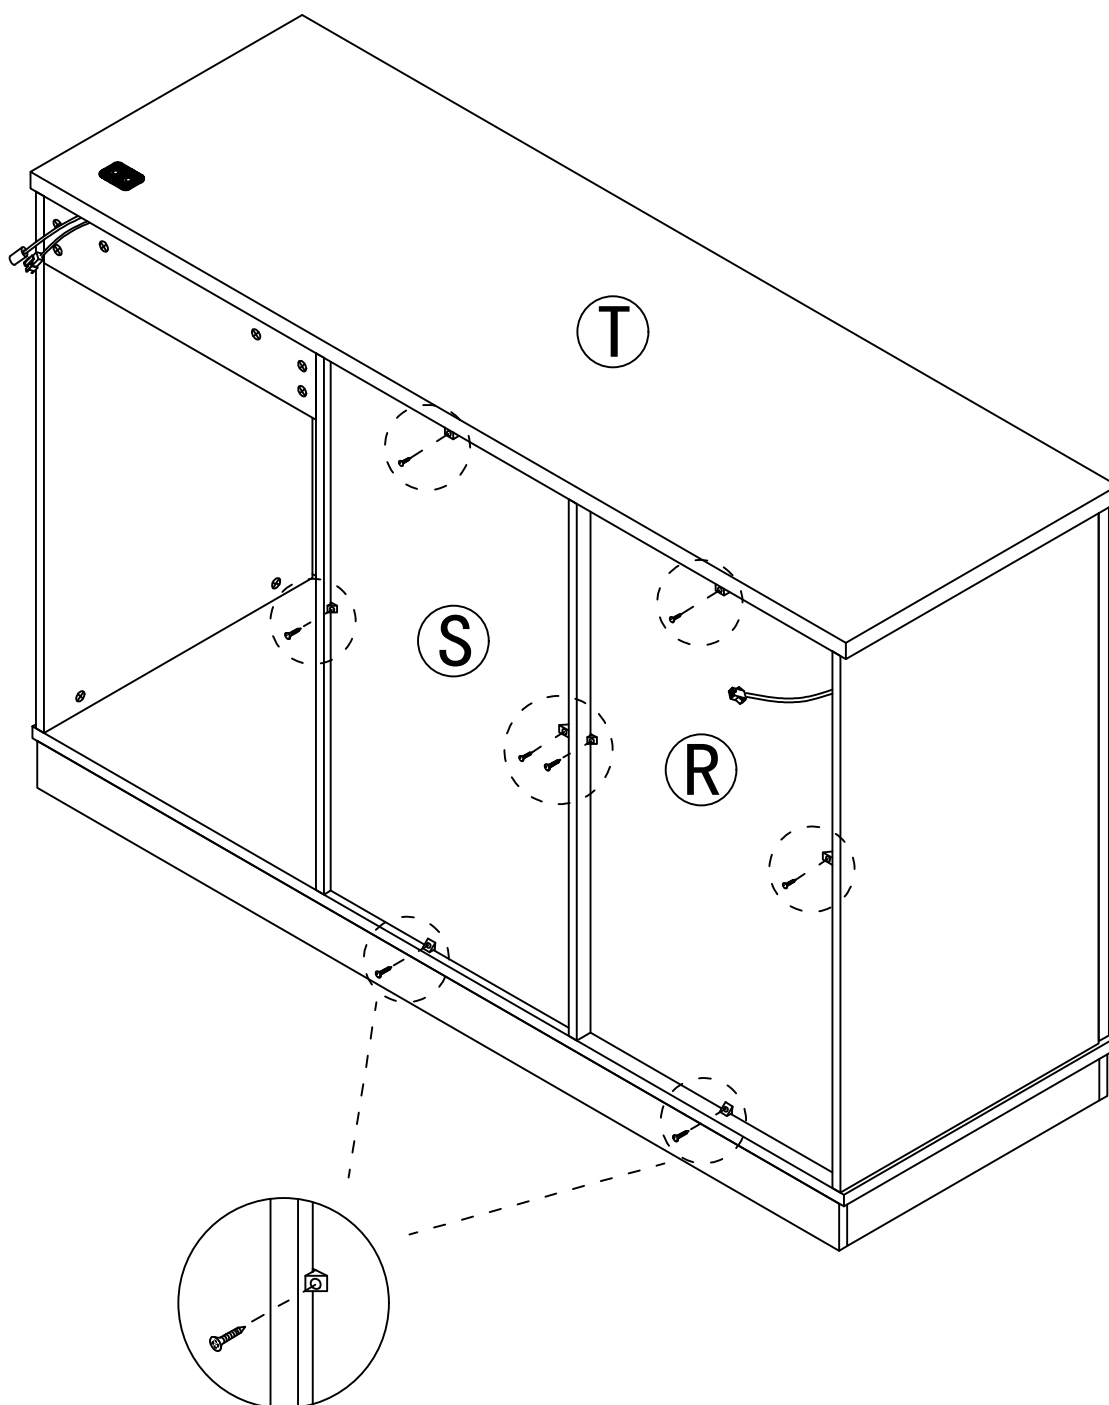

Step 43

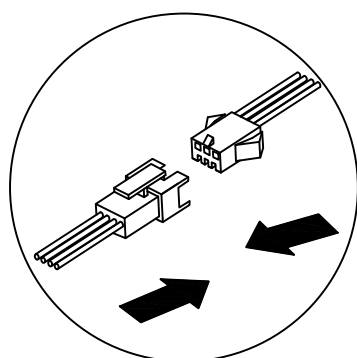
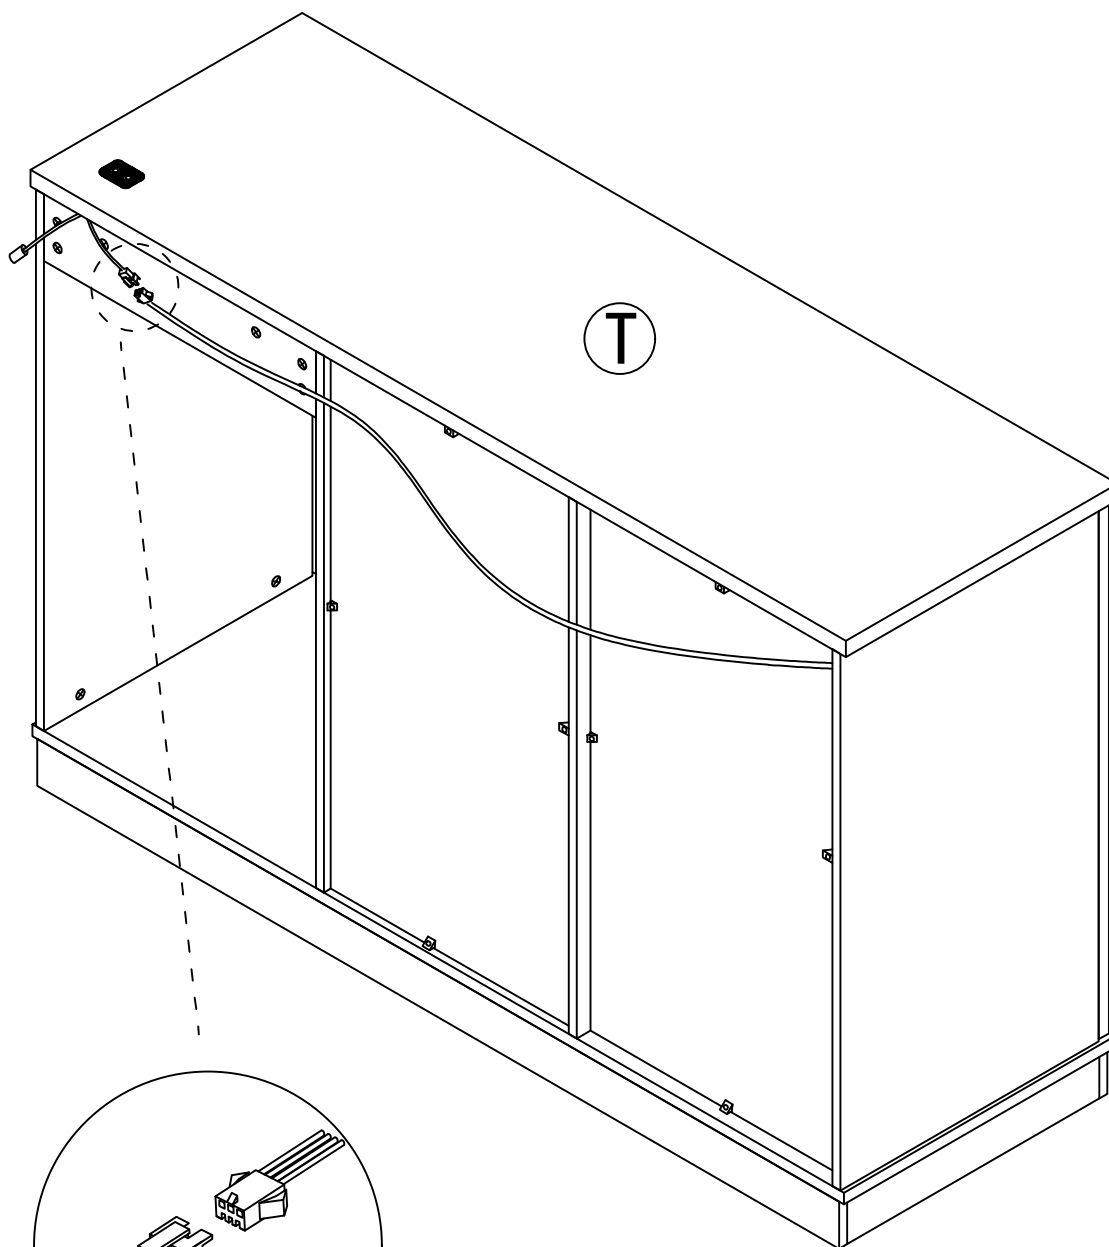


Step 44


10




x2

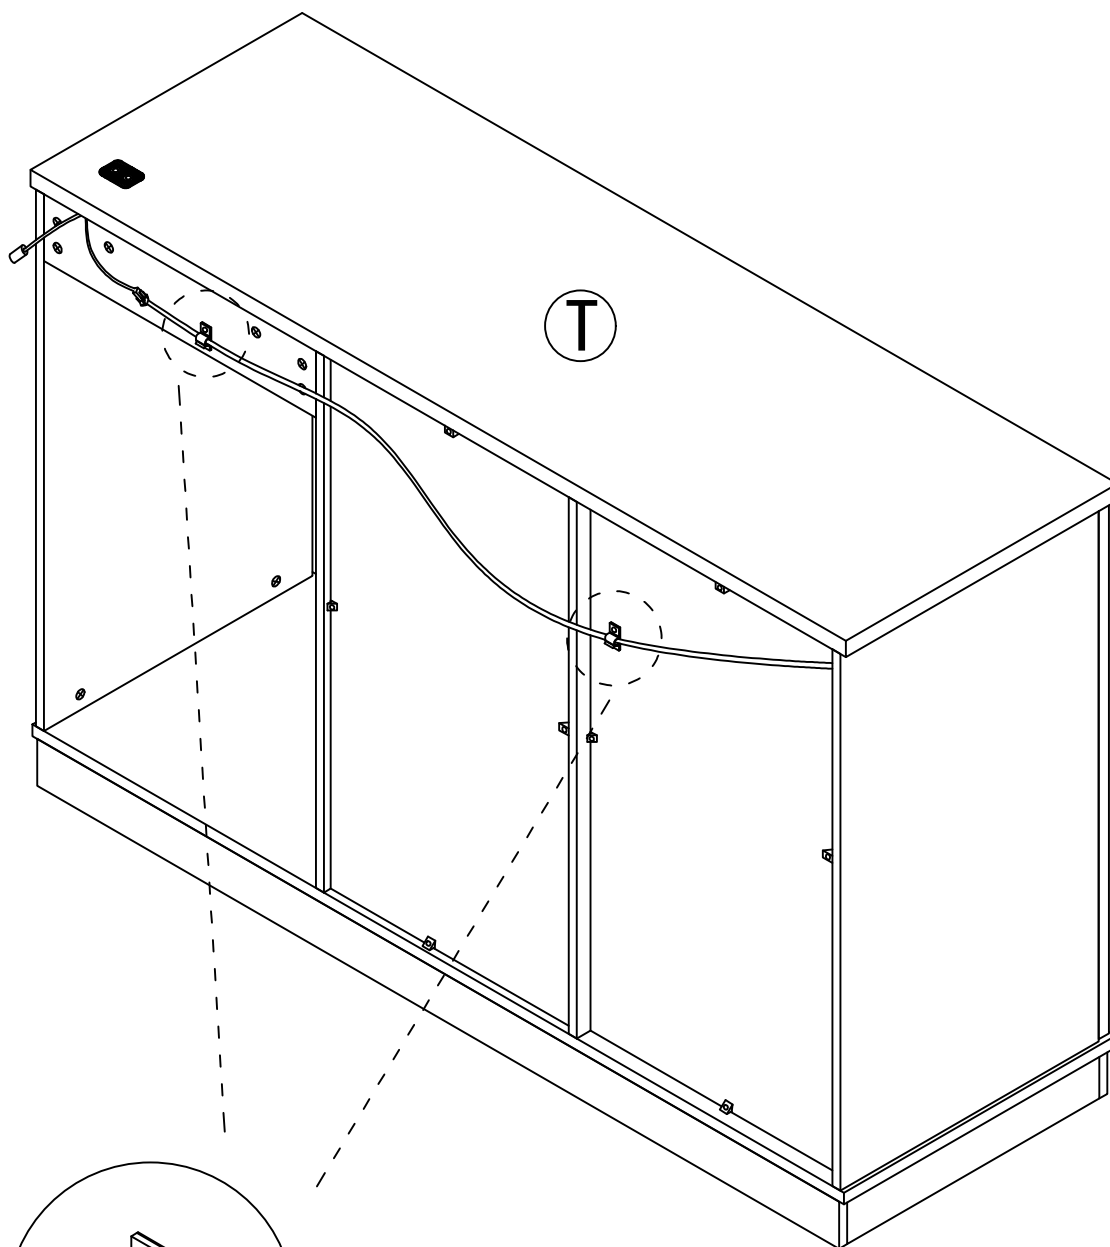

Step 45

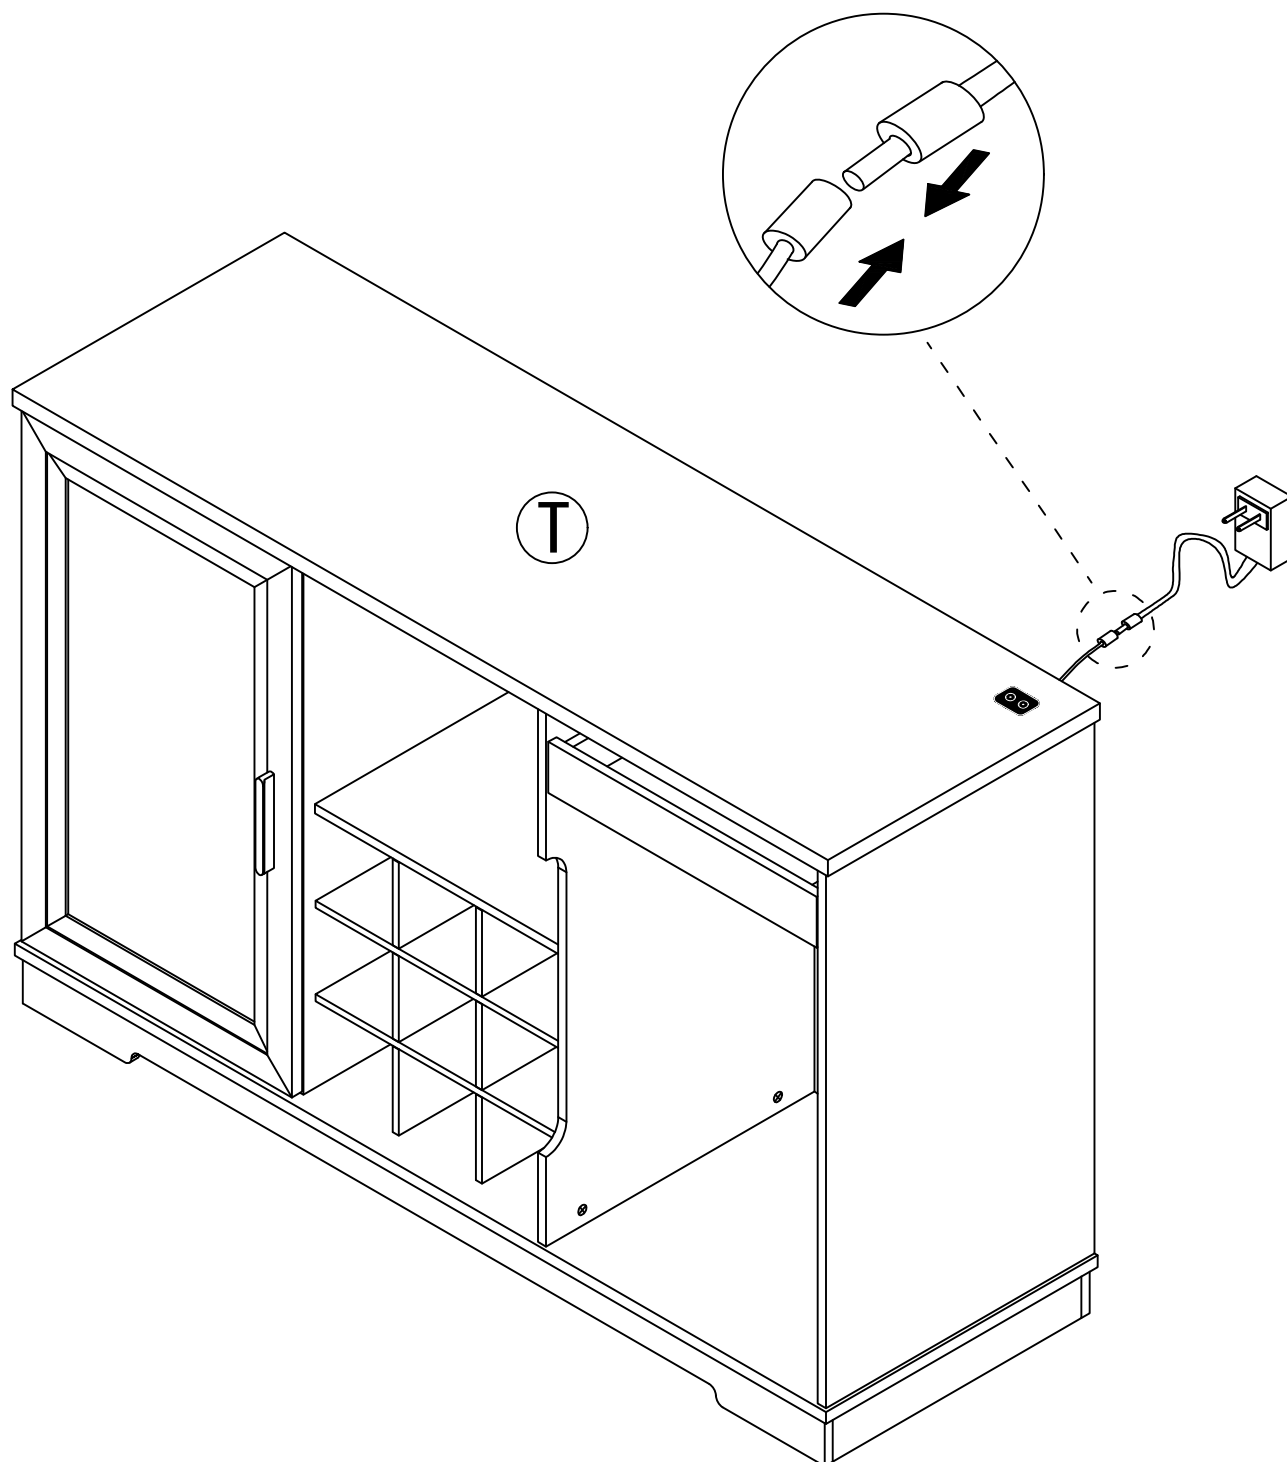

Step 46

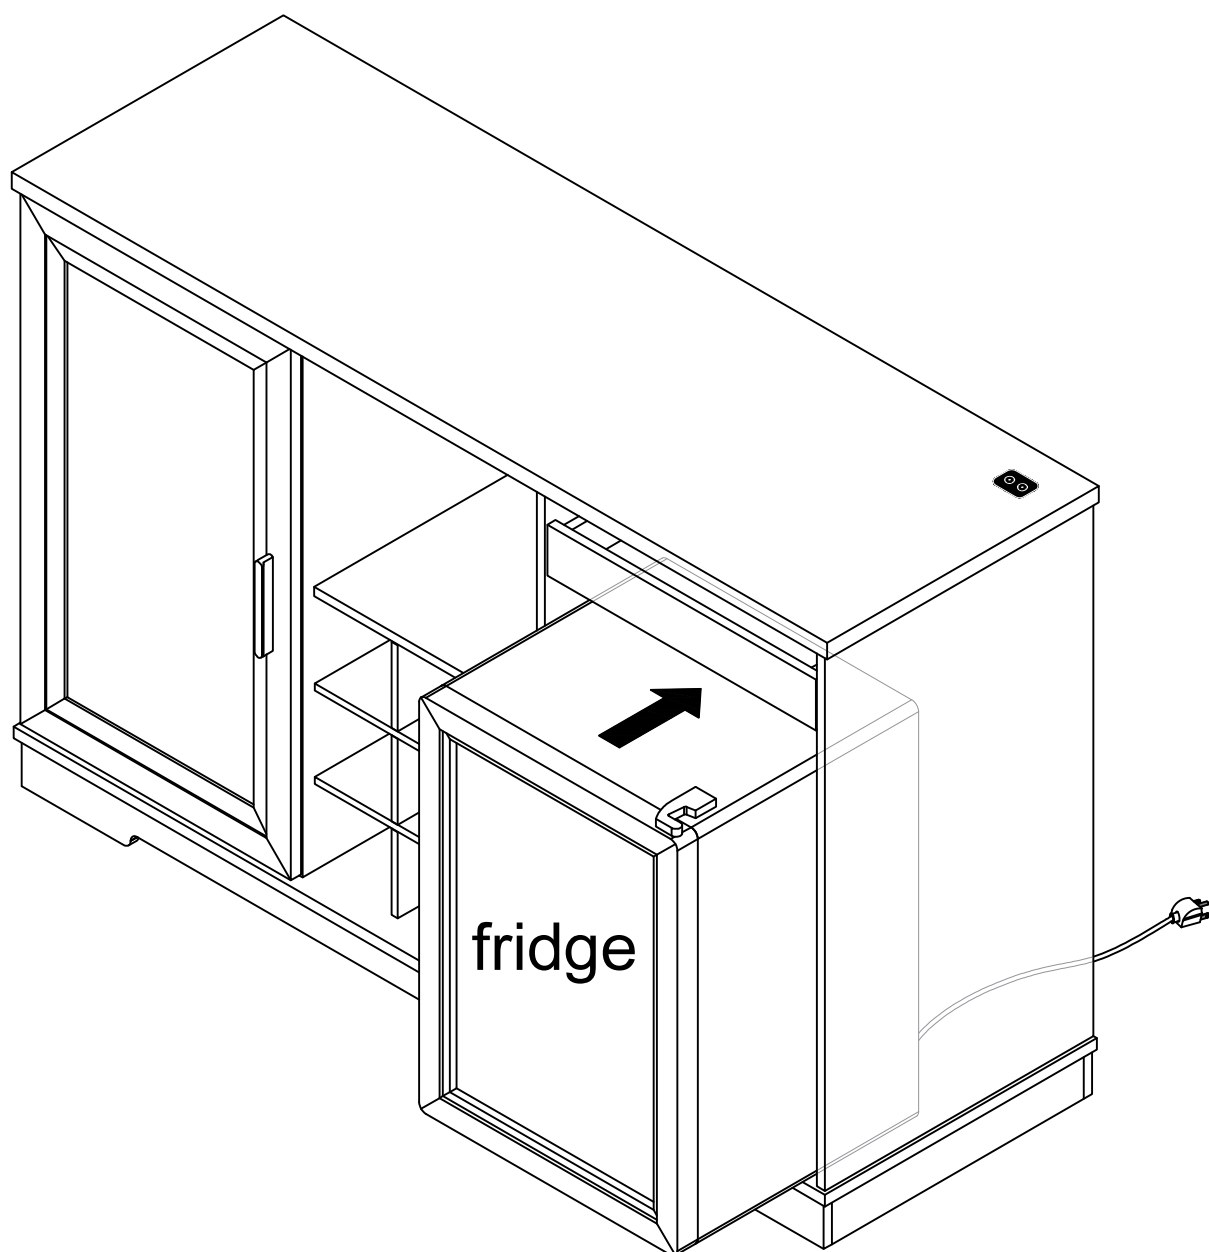

Note: After the cabinet is installed, insert the refrigerator into it.


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

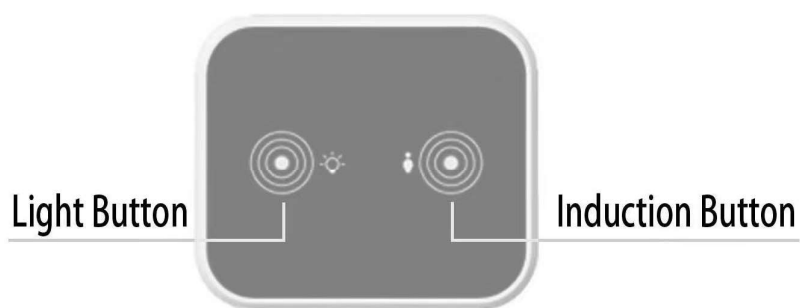

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.