


Assembly & Installation Instructions

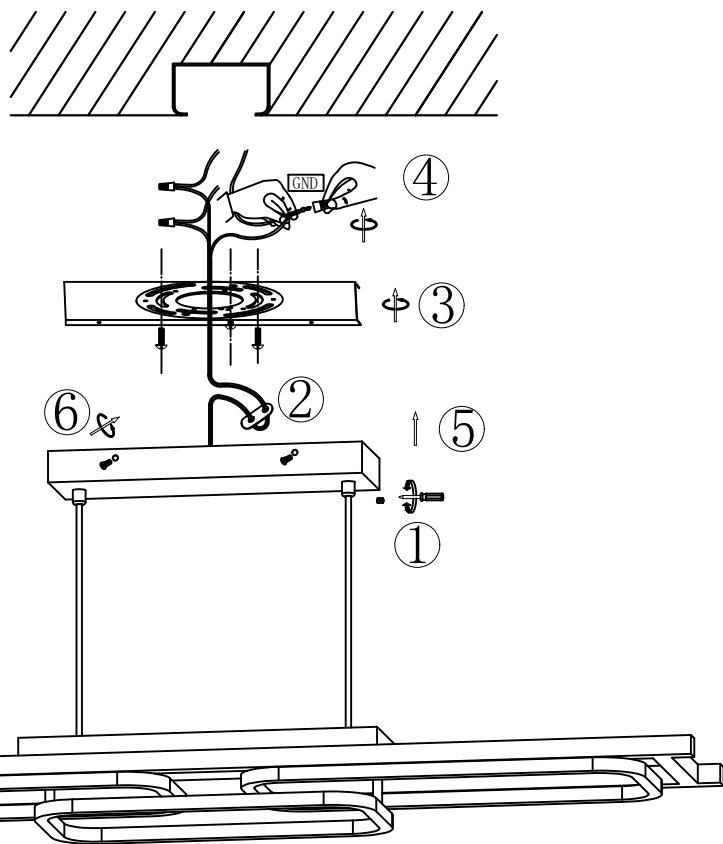

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Loosen the screws to adjust the wire length to your desired hanging height.
2. Use the wire fastener to secure the extra wire tightly in the canopy. Pull the wire fastener into contact with the canopy as closely as possible.
3. Secure the mounting bracket to the junction box with 2 mounting screws.
4. Make wire connections with wire nuts as follows:
Connect the BLACK wire from fixture to home LIVE wire.
Connect the WHITE wire from fixture to home NEUTRAL wire.
Attach the fixture ground wire to the mounting bracket using the green screw, and then connect it to the home ground wire with the wire nut.
Note: The bare wire can NOT be exposed to prevent leakage.
5. Lift the light fixture, cover the canopy over with the mounting bracket.
6. Align the mounting holes of the canopy with those on the mounting bracket. Secure the light fixture onto the ceiling by screwing in the screws from the sides.