








One guy slips it underneath the fish tank.

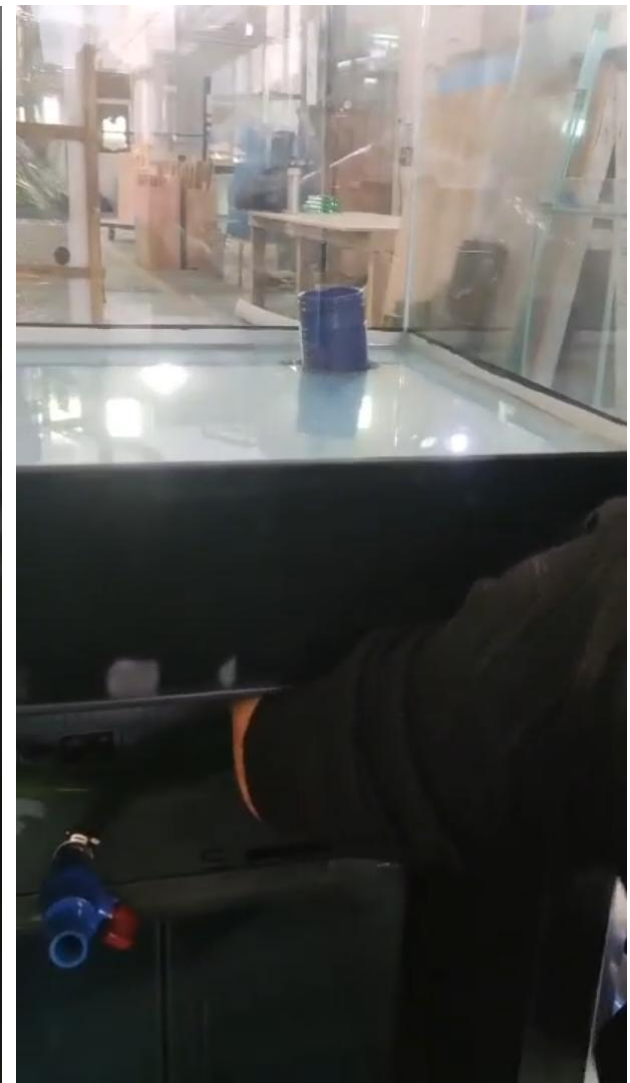



One person above will cooperate to screw the pipe, so it must be tightened.




After screwing, put the bellows inside in. The smallest pipe inside should be pressed down hard and tightened.



After screwing, put the bellows inside in. The smallest pipe inside should be pressed down hard and tightened.



After screwing, put the bellows inside in. The smallest pipe inside should be pressed down hard and tightened.

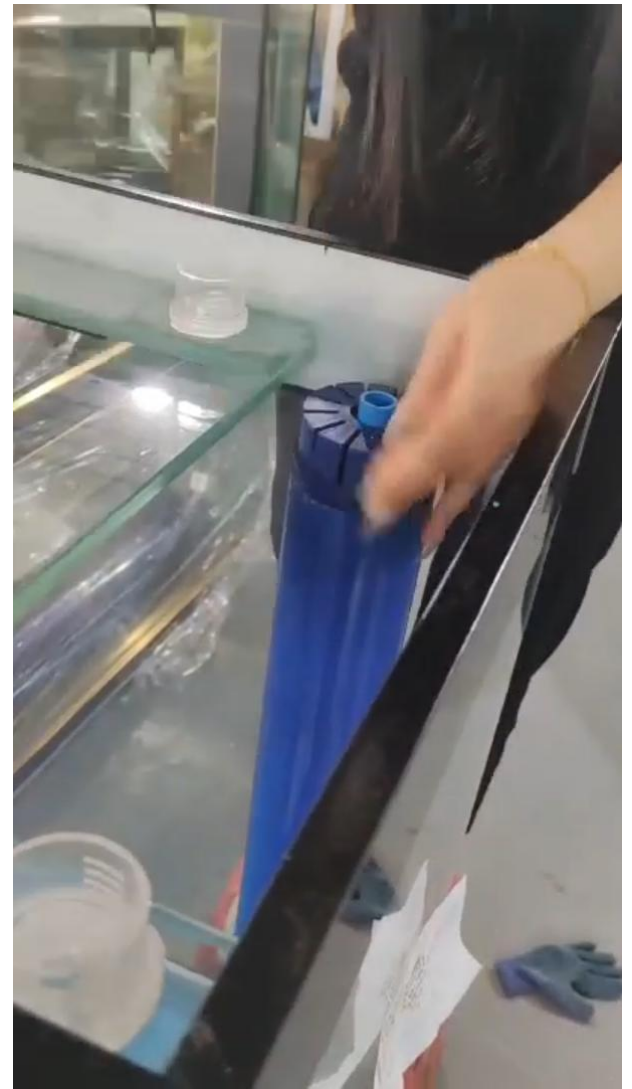






This is the drain pipe.  
The switch must be closed  
tightly at ordinary times.  
Use it when draining.




Another pipe goes through the  
hole in the cover first, and then  
connects the pump



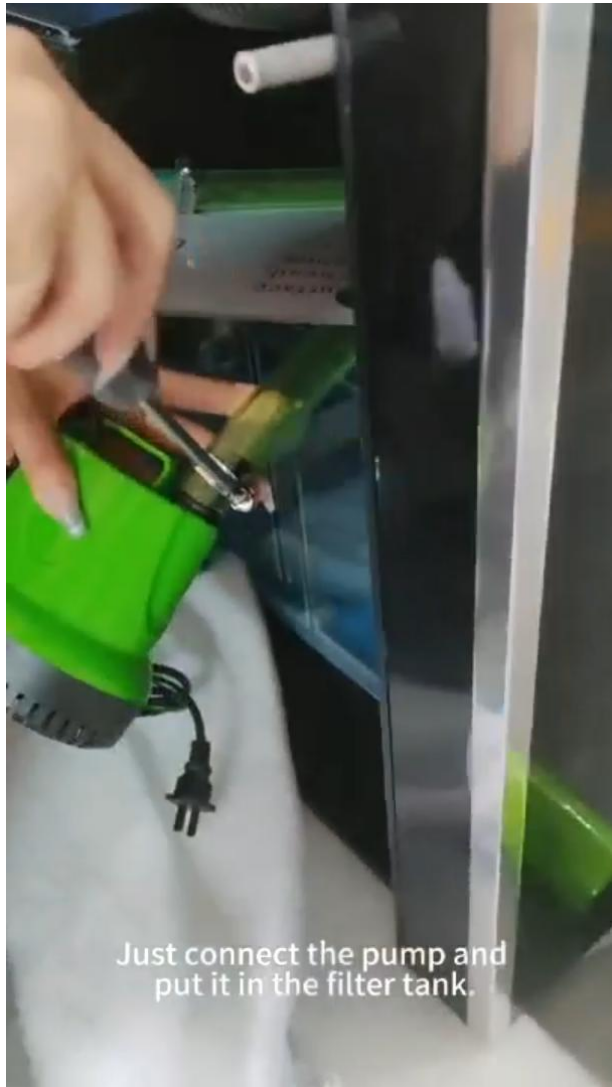

Just connect the pump and put it in the filter tank.

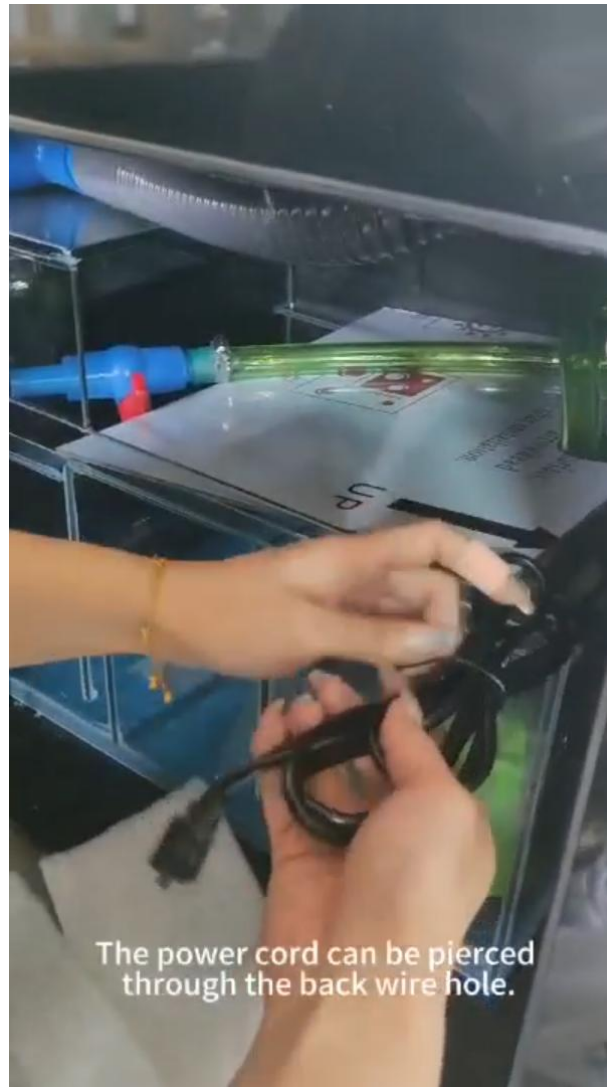

The power cord can be pierced through the back wire hole.



Then put the filter material into the filter tank, you can put it at will, and the filtering effect will be better if you put more.



Then put the filter material into the filter tank, you can put it at will, and the filtering effect will be better if you put more.



Take out the overflow box, put filter cotton in it, and put the sewer pipe away.



Take out the overflow box, put filter cotton in it, and put the sewer pipe away.






Connect the air pump to the pipe, connect the other end to the blue bubble strip, put the bubble strip into the fish tank, and put the air pump on the bar, so that it cannot touch the water.



Connect the air pump to the pipe, connect the other end to the blue bubble strip, put the bubble strip into the fish tank, and put the air pump on the bar, so that it cannot touch the water.





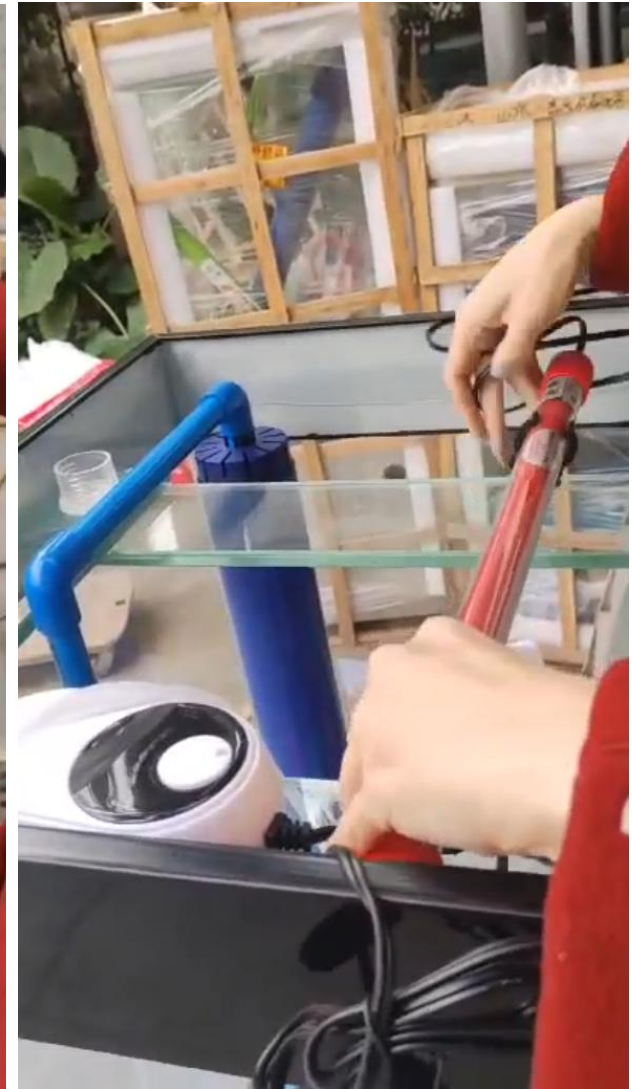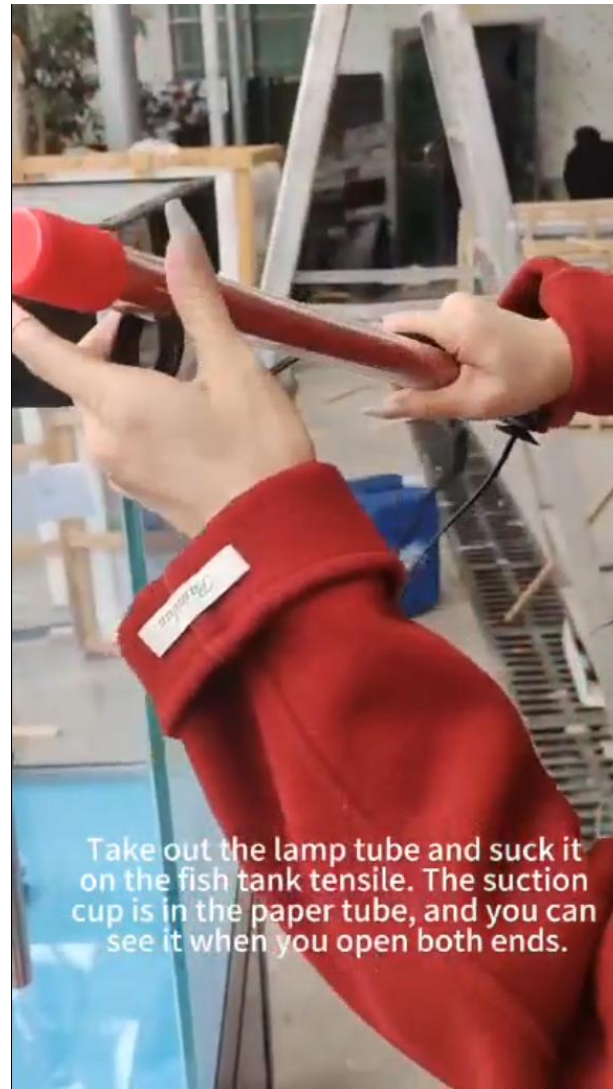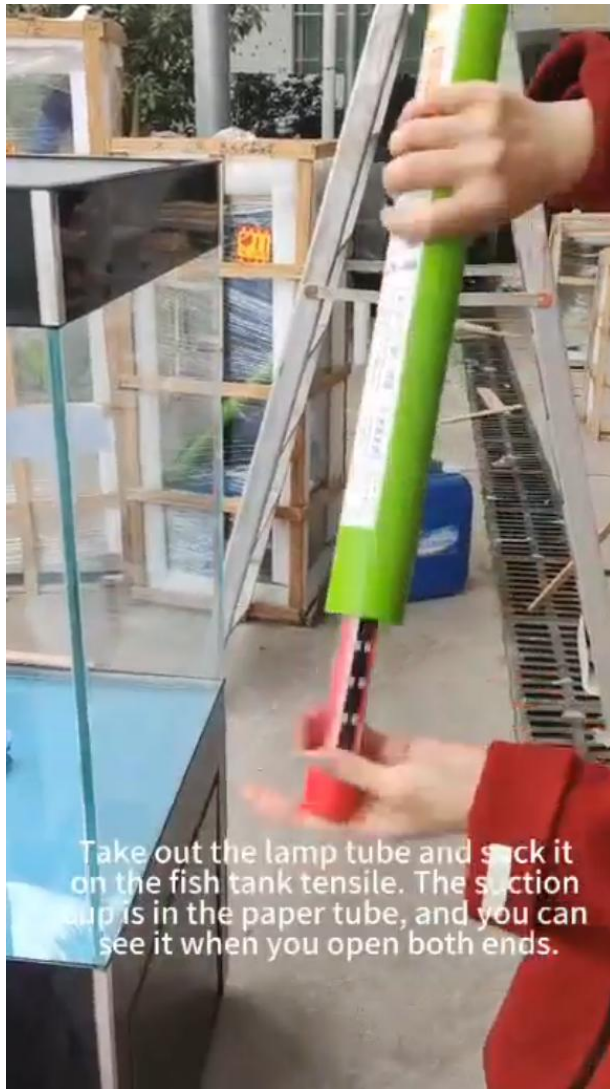



**END**