




Under-cabinet/Ceiling Mount



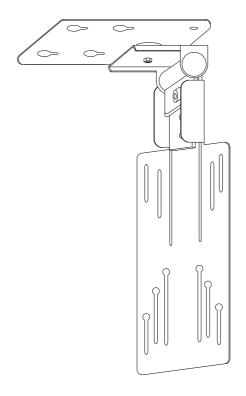

CAUTION:DO NOT EXCEED RATED LISTED WEIGHT.SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!

MI-4200











- Do not begin the installation until you have read and understood all the instructions and warnings contained in this installation sheet. If you have any questions regarding any of the instructions or warnings, please contact your local distributor.
- This mounting bracket was designed to be installed and utilised ONLY as specified in this manual. Improper installation of this product may cause damage or serious injury.
- This product should only be installed by someone with good mechanical ability who
 has basic building experience and fully understands this manual.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- Always use an assistant or mechanical lifting equipment to safely lift and position the equipment.
- Tighten screws firmly, but do not over tighten. Over tightening can cause damage to the items, This greatly reduces their holding power.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.

Component Checklist


IMPORTANT: Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, telephone your local distributor for a replacement.

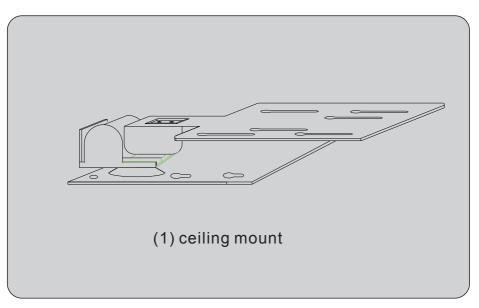


Package

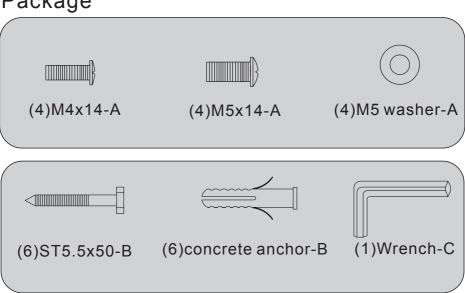

3a. For Wooden Ceiling Mounting

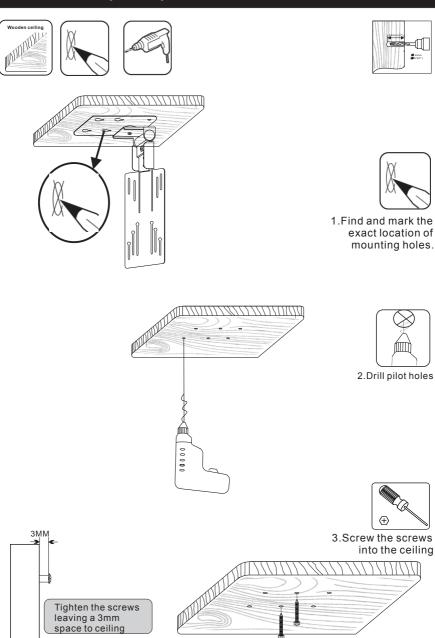


В



Align the both holes of ceiling plate to the screws in ceiling and move the ceiling plate until the both screws are seated in small area of tear-drop mounting holes.



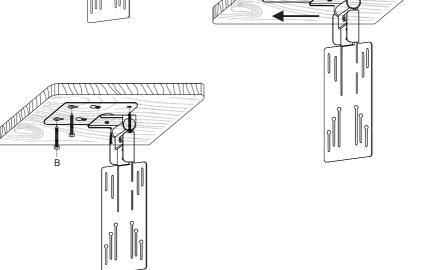


Fix the ceiling plate using four screws and then tighten all screws.




WARNING

- Installers are responsible to provide hardware for other types of mounting situations.
- Installers must verify that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.


3b.For Solid Brick and Concrete Mounting

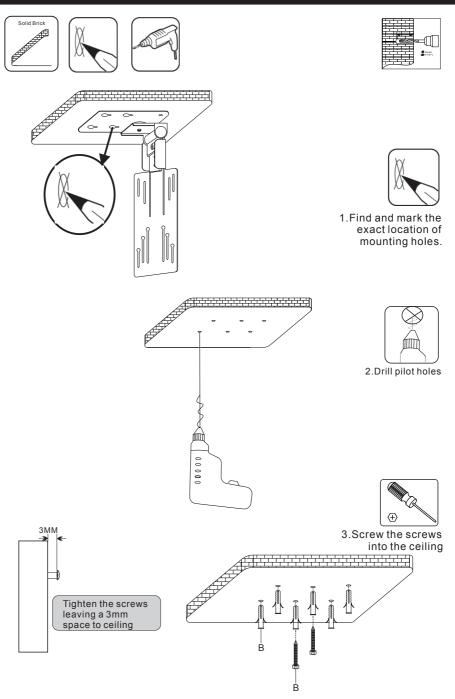




Align the both holes of ceiling plate to the screws in ceiling and move the ceiling plate until the both screws are seated in small area of tear-drop mounting holes.







Fix the ceiling plate using four screws and then tighten all screws.




WARNING


Installers must verify that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.



4. Attaching the Display to the VESA Plate

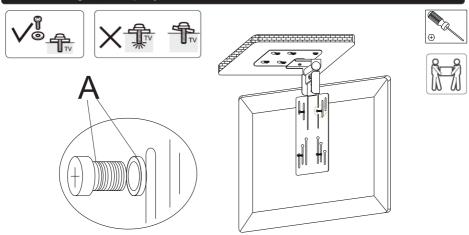

5.Adjustment

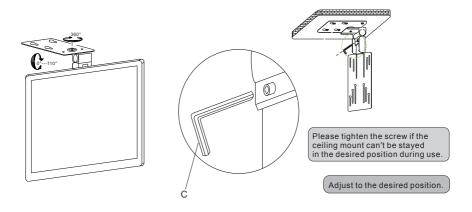

For saving the space, you can fold the display by pushing the display back until it fits in place.

Maintenance

- Check that the bracket is secure and safe to use at regular intervals(at least every three months).
 Please contact your distributor if you have any questions.

Rivision Date: 2017/8/8