



LED Linear Light (LS100 Series)



This high-performance LED light fixture delivers bright, uniform, and energy-efficient illumination with a 120° beam angle, 80+ CRI, and a low-profile design featuring a PMMA lens for glare-free lighting. Its durable white housing and aluminum heatsink provide efficient heat dissipation and over 50,000 hours of long-lasting performance. Selectable wattage and CCT, linkable installation, and optional motion sensor and emergency backup driver offer flexible lighting solutions. Suitable for damp locations, this versatile LED fixture is ideal for warehouses, factories, retail stores, commercial buildings, garages, schools, grocery stores, and other industrial and institutional spaces.


Specification

Length	Watt	CCT	Lumens	Dimmable	Voltage
2ft	20W	3500/4000/5000K Selectable or 3500/5000/6500K Selectable	2600 lm	0-10 V	120-277 V
4ft	20/30/40W		2600/3900/5200lm		
	40/60/80W		5200/7800/10400lm		
8ft	40/50/60W		5200/6500/7800lm		
	40/60/80W		5200/7800/10400lm		




LED Linear Light (LS100 Series)

DIMENSIONS

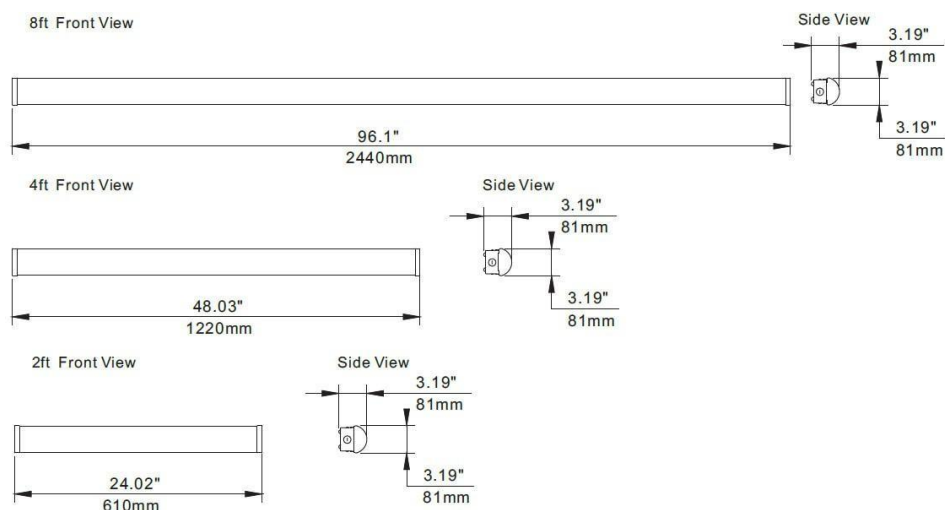

PHOTOMETRIC REPORT

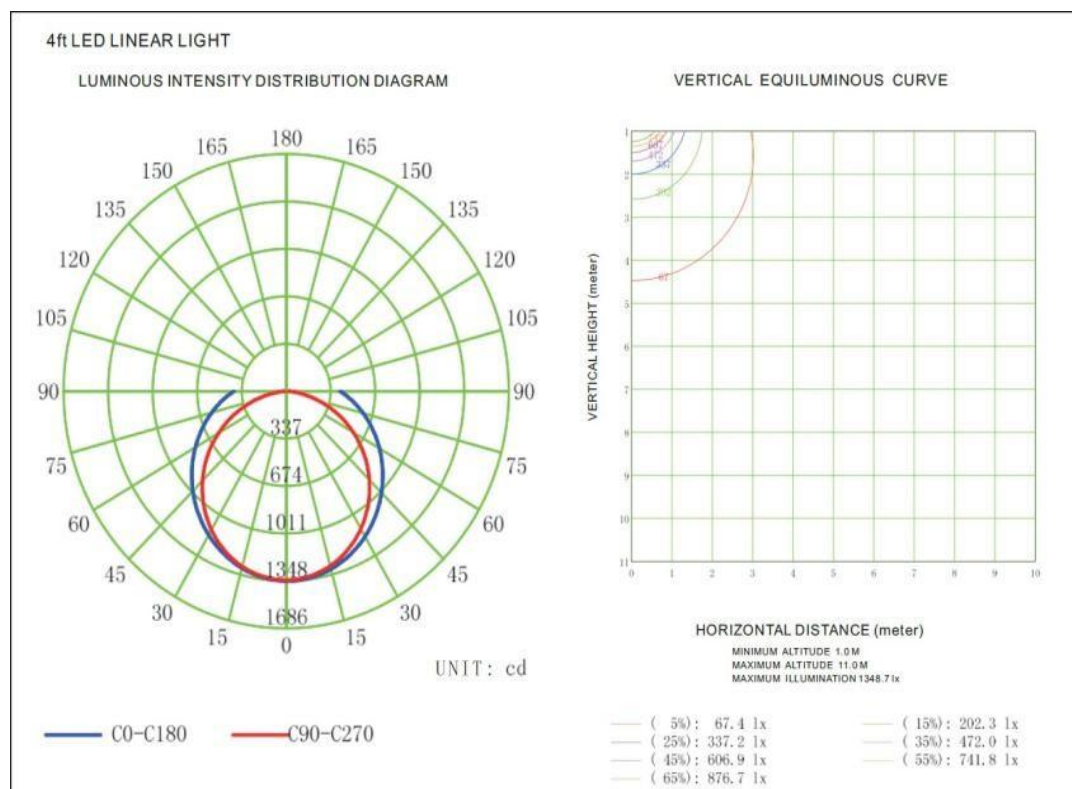





LED Linear Light (LS100 Series)

INSTALLATION

Surface Mount Installation

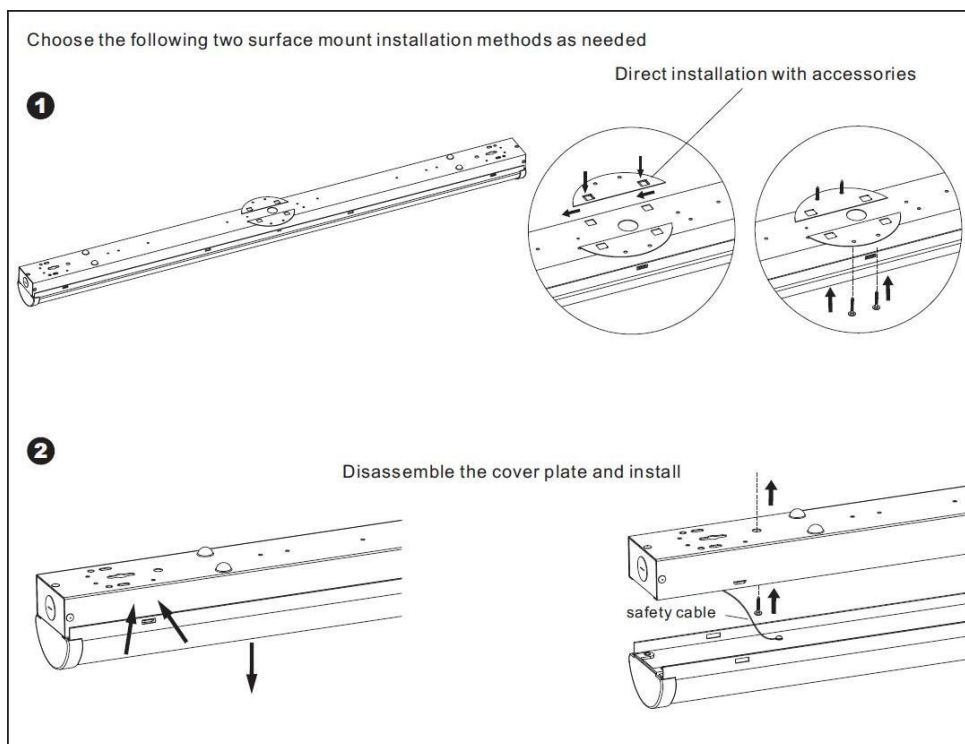

Suspension Installation

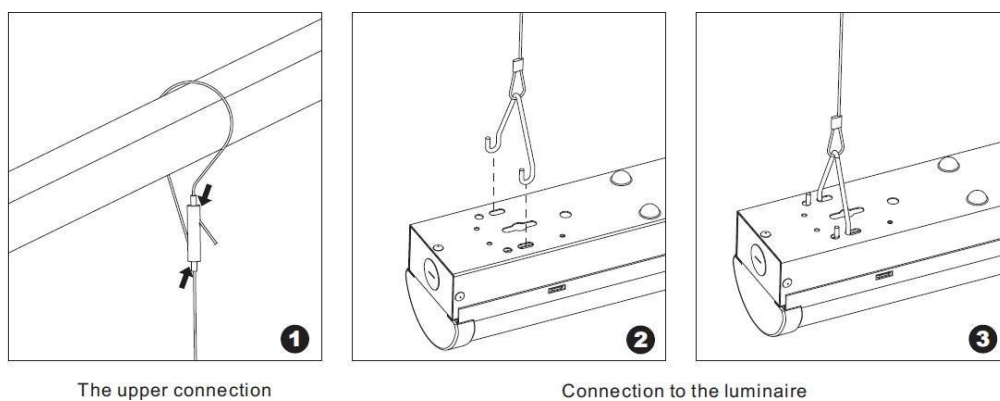

Connection Installation

