



# Ceiling Fan With Light

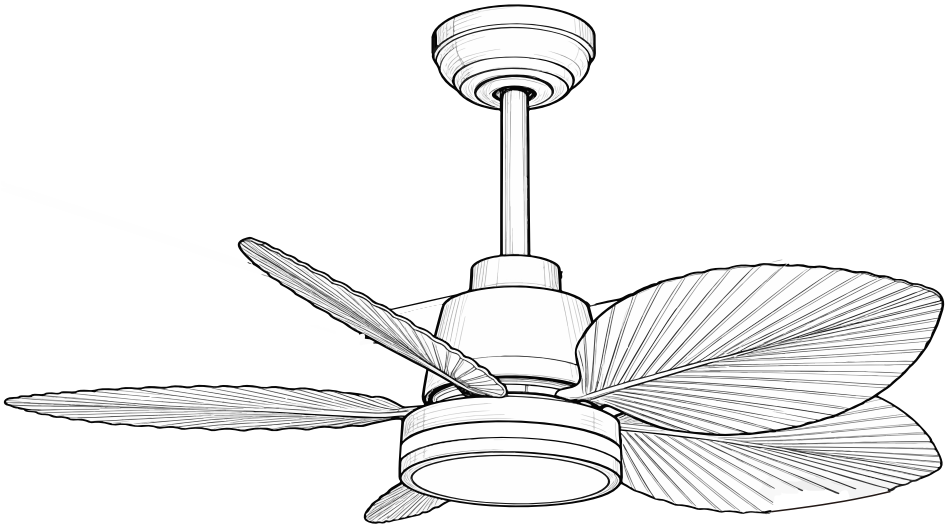

# (1) Required Tools

- Phillips Head Screwdriver
- Flat Head Screwdriver
- Adjustable Pliers or Wrench
- Step Ladder
- Wire Strippers/Cutters
- Electrical Tape
- Impact Drill

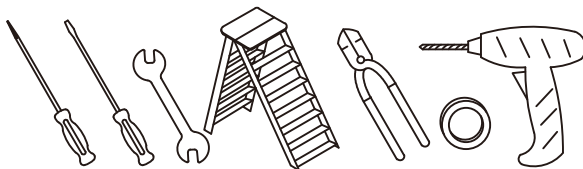


## WARNING

- (1). To avoid the risk of electric shock, ensure the power is turned off at the main fuse box before wiring. Installation must be performed by a licensed electrician.
- (2). This fan is not compatible with dimmer switches or variable-speed solid-state wall controls.

## Maintenance

- (1). It is recommended to inspect all connecting parts at least once a year- including the mounting bracket, downrod fasteners, and fan blades -to ensure they are secure and functioning properly.
- (2). Clean the fan blades regularly to maintain performance and reduce dust buildup.
- (3). The motor bearings are pre-lubricated with grease. Do not apply additional oil or lubricants to the motor.




1B: Wear protective gloves during installation.


1A: Turn OFF the power at the main fuse or circuit breaker before installation.

## (2) Mounting Bracket Installation


a:Masonry/  
Concrete / Brick

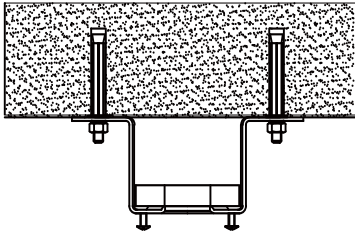

b:wood




c:Outlet box

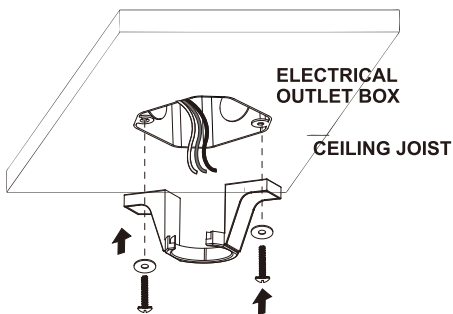

Choose different screws for installation based on the different materials of the roof.

### (3) Replacement of Downrod

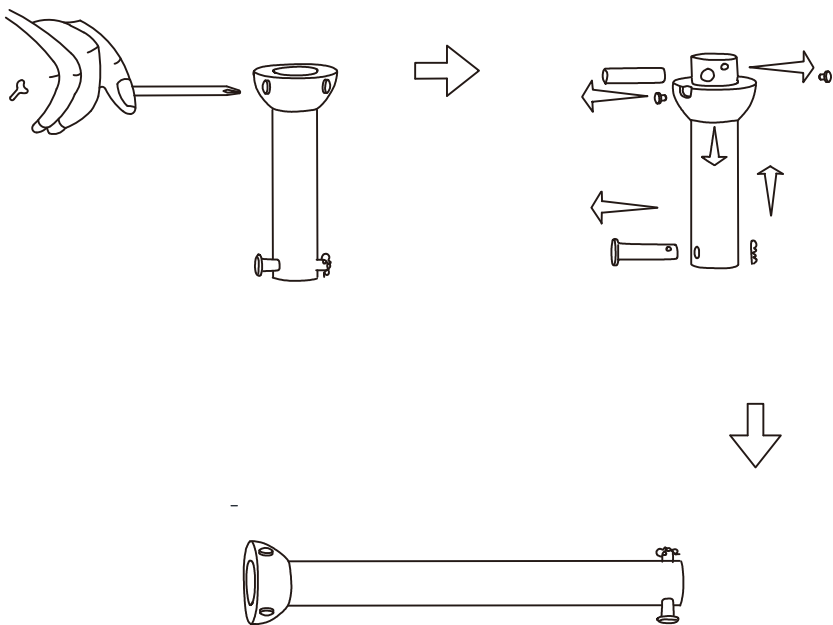


- Before installation, select the appropriate downrod length based on your ceiling height. Replace the standard downrod according to the diagram below.

## (4) Mounting The Fan Assembly



Hanger stuck point" → "Mounting Bracket Tab"

Hanging ball slot" → "Downrod Ball Slot"

Hanging ball card slot stuck hanger stuck point → Align the downrod ball slot with the mounting bracket tab

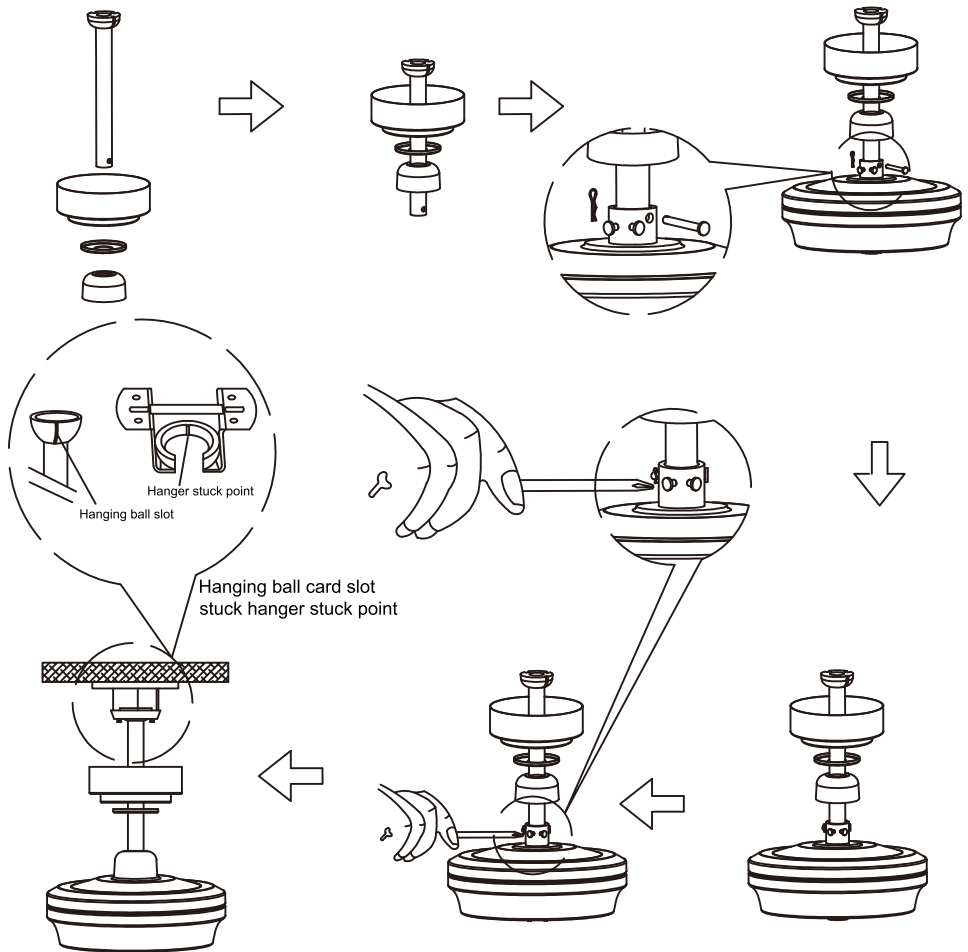


the ceiling fan with a light is installed as follows.

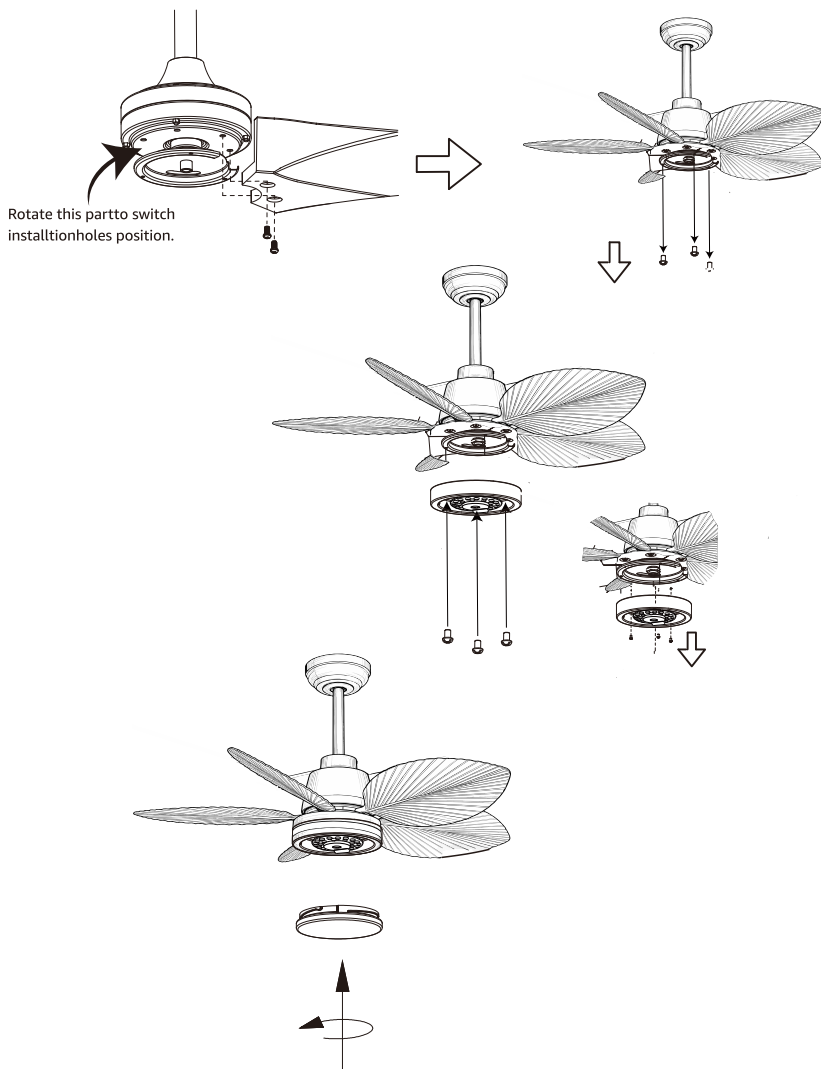

Make sure the installation is correct before turning on the power.

# BLDC Fan Light Remote Control Manual

2.4Ghz frequency control can adjust color temperature and brightness

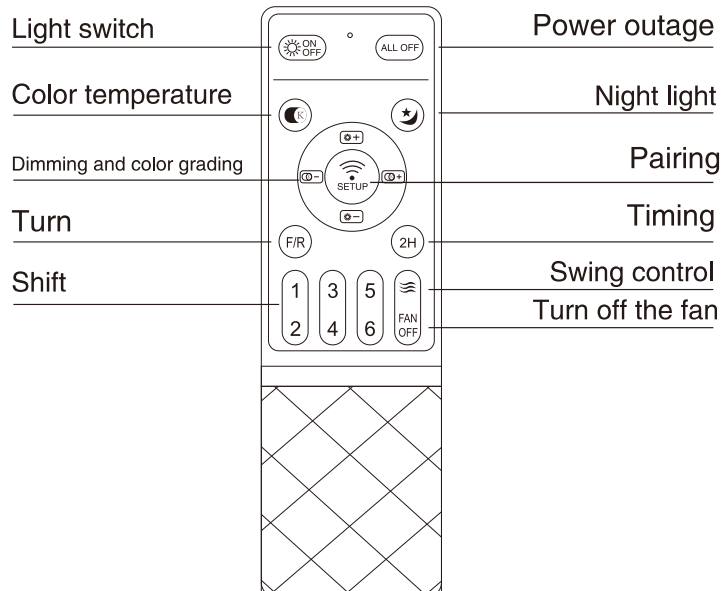

Battery model

7#1.5V\*2

Match code: After power on, press the code matching key for a short time within 5 seconds, and the light flashes twice. The code matching is successful.

Clear code: After power on, press and hold lamp switch for 3 seconds within 5 seconds. Clear code is successful.

PS: When the remote controller cannot be controlled effectively, please check the battery. When not in use for a long time, please take out the battery.



Scan Download App