


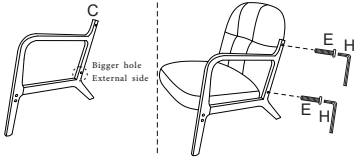



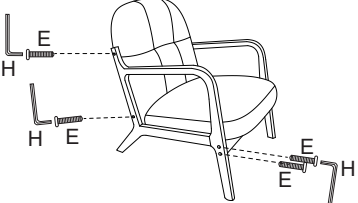








TIPS:

1. In order to facilitate the assembly, the screw holes related to the product structure have an adjustable range.
 2. When assembling, please align the screws on the armrest and the beam and install them to 50% first.
 3. After all the screws are installed, then tighten them all to 100%.
- (The screws connecting the seat and the backrest can be directly screwed to 100%)

<p>(A)x1 Back</p> 	<p>(F)x2 Screw</p>  <p>M8x60</p>	 <p>1 Please put the backrest on the floor. Then lift off the black cloth at the bottom of the seat and find 2 screw holes, installed the 2 screws directly to 100%</p>	 <p>2 Please put the chair on its side, then put the armrest on it to install, please install the screws to 50%</p>
<p>(B)x1 Seat</p> 	<p>(G)x2 Washer</p> 	 <p>3 After breaking the cushion part upwards and aligning the holes in the beam, please install the screws to 50%</p>	 <p>4 Please install the screws of right armrest. After all the screws are installed correctly, you can tighten them to 100%</p>
<p>(C)x1Lx1R Arms</p> 	<p>(H)x1 Screwdriver</p> 	 <p>5 Well done! Please enjoy your leisure time.</p>	
<p>(D)x1 Beam</p> 	<p>(I)x4 Gasket</p> 		
<p>(E)x8 Screw</p>  <p>M8x50</p>			