

# Fuzion 7242 Soaking Bath



Product Codes beginning with: FUZ7242BCX

Also applies to products sold under part numbers: GL95, KM05

## TECHNICAL SPECIFICATIONS

	English	Metric
Outer Dimensions	72" L x 42" W x 24" H	1829 mm L x 1067 mm W x 610 mm H
Interior Dimensions (bottom of bath) L x W (Mid) x W (End)	46" L x 27" W x 27" W	1168 mm L x 686 mm W x 686 mm W
Drain Configuration	Center drain	Center drain
Bath Weight (empty)	92 lbs	41.7 kg
Total Weight/Floor Loading	1,242 lbs 59.1 lbs/ft <sup>2</sup>	563 kg 289.9 kg/m <sup>2</sup>
Operating Gallonage (max)	108 (max) U.S. Gals	409 (max) L
Electrical Specifications	<b>Each component requires a separate, dedicated GCFI protected circuit(s)</b>	
Chromatherapy (if selected)	120V 15A 60HZ	

## FEATURES, UPGRADES & ACCESSORIES

**Material Type:** High-Gloss Acrylic

**Install Type:** Drop-in with wood frame or Undermount

**Available Colors:** White (W), Almond (A), Oyster (Y), Black (B)

**Cut-out:** 70" x 40" or Undermount Template GR23000

**Standard (Included) Features:** Infinity edge overflow, 2 pillows, chrome twist and turn drain (for alternate finishes, replace with standard parts, 1.5" drain elbow)

**Available Control Systems:**

Chromatherapy lighting

\*Control panel installation is done by installer, location optional

**Available Upgrades:**

Chromatherapy lighting

**Available Accessories:**

GD56 Light Chromatherapy Control Kit (for GL95)

GQ88 Light Chromatherapy Add-on Kit


DD50 Replacement Pillow (specify color) 959: White, 958: Almond, 969: Oyster

GP95 Optional wood frame (specify wood) 900: Unfinished, 935: Wenge, 935: Teak

**\*Faucet installation note:**




Selecting a faucet for rim mounting: The combined thickness at the rim of the bathtub shell and optional wood deck is 2" (50mm) nominal. The length of the faucet tailpiece(s) must be long enough to extend past this dimension and have ample clearance to assemble any hardware (i.e. locknut, water supply fittings, etc.) necessary for installation. For undermount units, the combined thickness of the bathtub shell is 1/2" (12mm) nominal and the undermount deck should not exceed the length of the faucet tailpiece(s), including any assembly hardware.

## KEY DIMENSIONS

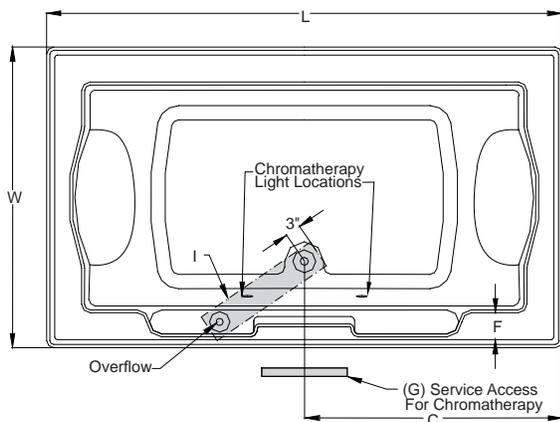

\*Deck width reflects only area indicated on detail.

Letter	Description	English	Metric
L	Outer Length	72"	1829 mm
W	Outer Width	42"	1067 mm
H	Overall Height**	24"	610 mm
A	Overflow Height	17"	432 mm
B	Long Edge to Drain Center	10 1/4"	260 mm
C	Short Edge to Drain Center	36"	915 mm
D	Drain Shoe Length	8 1/2"	216 mm
E	Deck Height**	4"	102 mm
F	Deck Width*	3 1/2"	89 mm
G	Service Access Dimensions	12" H x 18" L	305 mm x 457 mm
I	Floor Cut-out for Drain	18 1/2" x 4"	470 mm x 102 mm

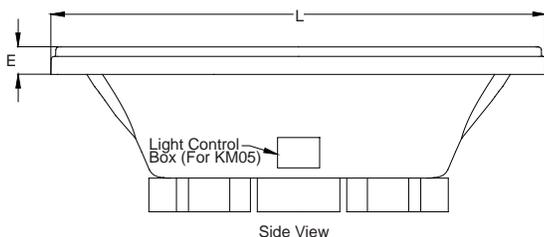

NOTE: Graphics May Not be to Scale

© 2010 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • [www.jacuzzi.com/technicalspecs](http://www.jacuzzi.com/technicalspecs)

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

HD41000 REL 03/10