


Type _____



Catalog No.	Finish		Lamping	Dimensions (Inches)		
	Brushed Nickel			A	B	C
			3 (m) 100w	19-3/8	17	56

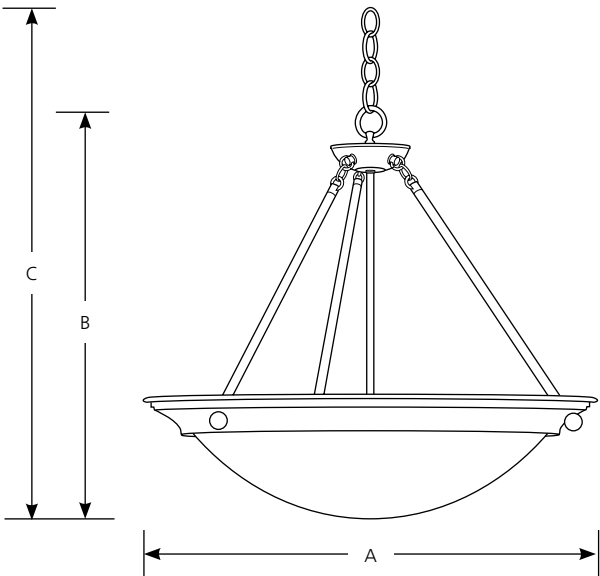

Specifications:

General

- Satin white glass bowl
- Plated Brushed Nickel finish
- Steel construction
- Three feet of 9 gauge chain
- Companion Close-to-ceiling, Hall and Foyer, Sconce, fixtures are available

Electrical

- Medium base ceramic sockets
- 15 feet of wire supplied
- Pre-wired

Labeling

- UL-CUL listed

Mounting

- Ceiling chain mount
- Canopy covers a standard 4" hexagonal recessed outlet box: 5-1/2" dia.
- Mounting strap for outlet box included



SEMI-FLUSH AND CHAIN HUNG

No. Lamps: 3 Type Lamp: Total Lumens: 5130 Fixture

Efficiency: 51.2%


S/MH Ratio: 1.3

Quick Calculator Charts

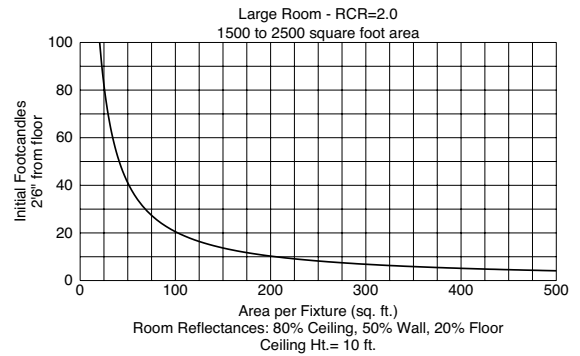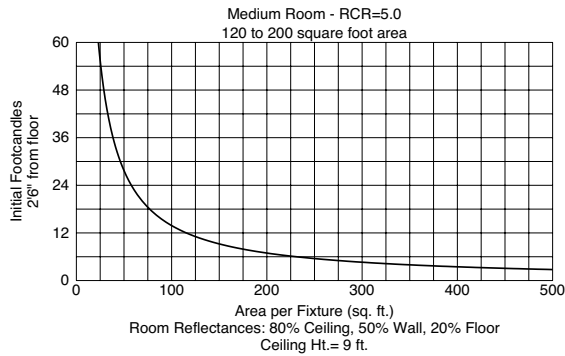

DISTRIBUTION CURVE

INTENSITY DATA

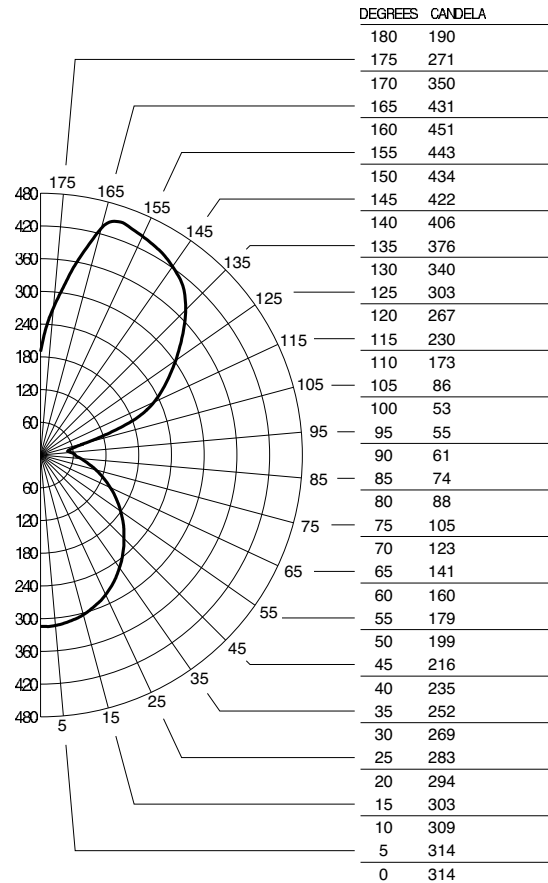

Single Fixture Data

	10% Values		Zero Degrees	50% Values	
Ceiling Ht.(Ft.)	Beam Angle - 112			Beam Angle - 65	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	1.0	16	10.4	5.2	7
10	0.6	22	5.6	2.8	10
12	0.3	28	3.5	1.7	12
14	0.2	34	2.4	1.2	15
16	0.2	40	1.7	0.9	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20																					
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
0	54	54	54	54	49	49	49	49	40	40	40	32	32	32	24	24	24	21			
1	48	46	44	42	44	42	40	38	34	33	31	27	26	25	20	20	19	16			
2	44	40	36	34	40	36	33	31	29	27	26	23	22	20	18	17	16	13			
3	40	35	31	28	36	32	28	25	26	23	21	20	19	17	15	14	13	11			
4	36	31	26	23	33	28	24	21	23	20	18	18	16	14	14	12	11	9			
5	33	27	23	20	30	25	21	18	20	17	15	16	14	12	12	11	10	8			
6	31	24	20	17	28	22	18	16	18	15	13	15	12	11	11	10	8	7			
7	28	22	18	15	26	20	16	14	16	14	12	13	11	9	10	9	7	6			
8	26	20	16	13	24	18	15	12	15	12	10	12	10	8	9	8	7	5			
9	24	18	14	11	22	16	13	11	14	11	9	11	9	7	8	7	6	5			
10	23	16	13	10	21	15	12	10	13	10	8	10	8	7	8	6	5	4			