

INSTRUCTION MANUAL


WARNING

(To reduce the risk of fire, electric shock, or injury to persons):


1. We suggest installation by a licensed electrician.
2. Before you start, NEVER attempt any work without shutting off the electricity until the work is done.
 - A). Go to the main fuse, or circuit breaker, box in your home.
 - B). Place the main power switch and the wall switch in the "OFF" position.
3. Mounting surface should be clean, dry, flat.
4. Make sure that the wall can stand the weight of the lamp before fixture.
5. Make sure the voltage you are using is 120V. The maximum wattage is 60W per bulb.
6. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
7. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly
8. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

Step 1. Assemble Lamp Body

1. Align the hole of left and right light arm A1, A2 and move the accessories B to the middle then adjust the Angle
2. Thread the black and white wires through the two holes C1, C2 above the metal plate, and secure them using screw nut D1, D2
- 3 Using the screw wrench F to fix the small screws above the accessories B and adjust the positions of the two light arm then tighten them

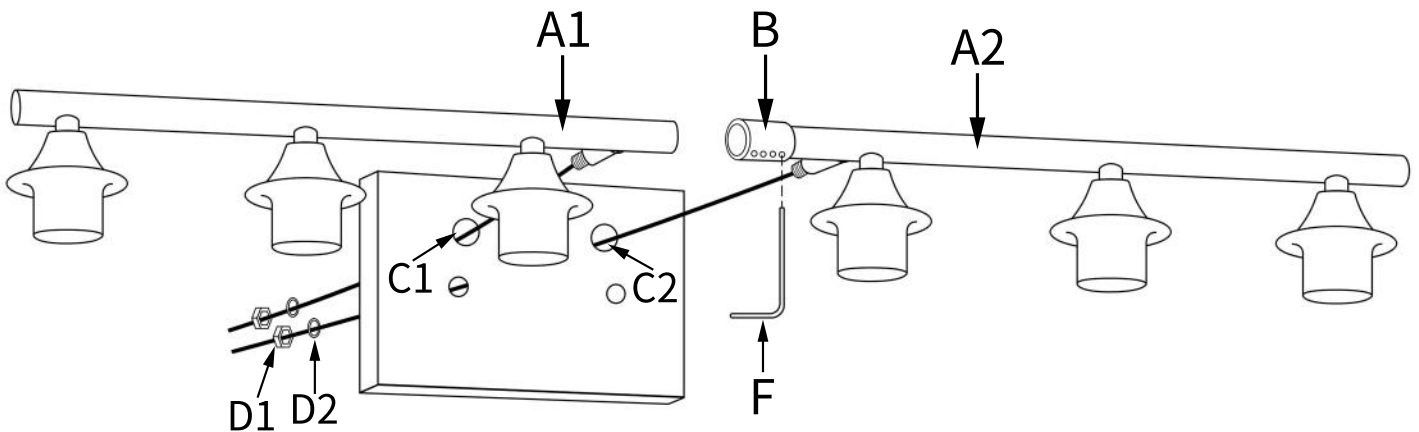


Step 2. Connect the Wires

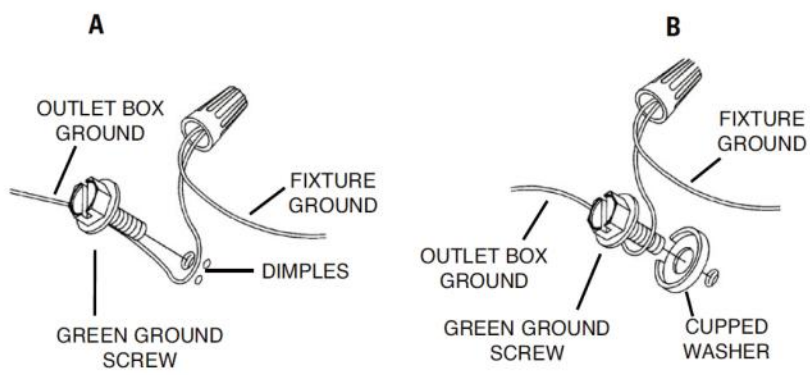


Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



Step 3. Install the Lamp

- 4. Fix the hanging plate G to the wall with the screw E1, E2 and connect the wall wire and the lamp wire with the wire cap H (Note: If the connection wires is not long enough, you can use an extension wires P)
- 5. Fix the lamp I to the wall with the screw nut K1,K2
- 6. Install the glass lampshade and light source on lamp holder

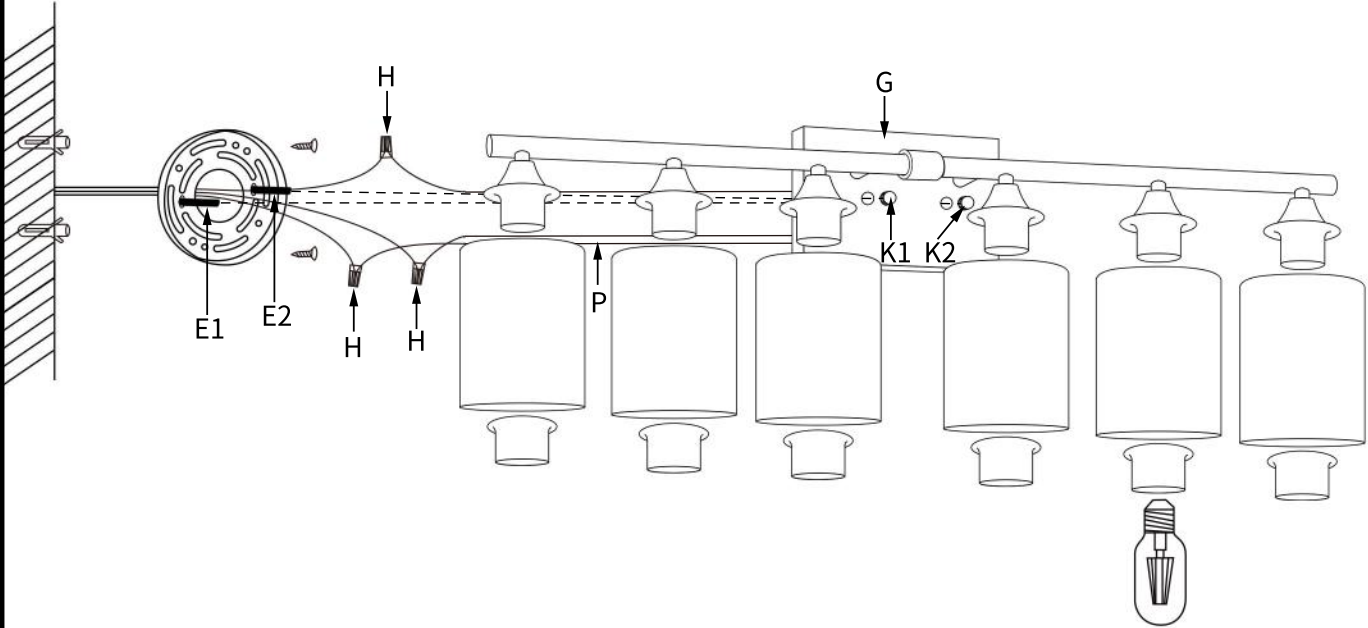

Accessories List:



Instruction



Wire connector



Screw



Screw wrench



Extension wires