

LED Crystal light fixture


Assembly Instructions

ARTS TYPE & QTY INCLUDING

Description	Quantity
(A) Mounting plate	x 1
(B) Green ground screw	x 1
(E) Mounting Screw	x 4
(F) Back Plate	x 1
(G) Lamp body	x 1

ACCESSORIES & QTY ENCLOSED


(C) Screw	x 2
(D) Wire connector	x 3

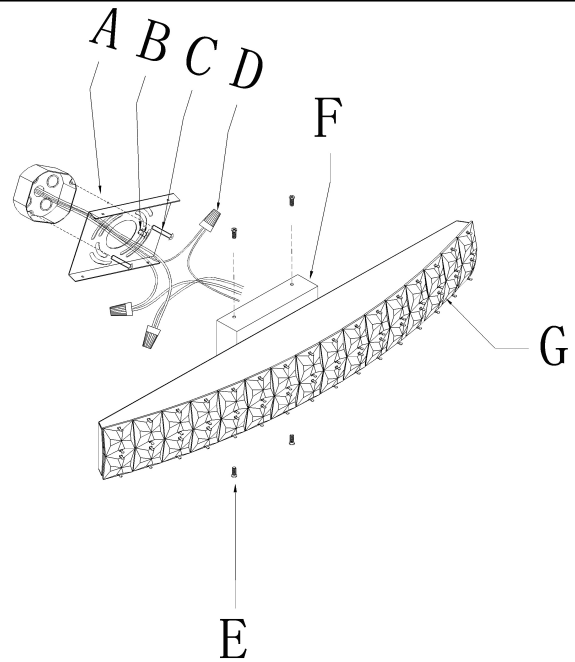


WARNING & INSTALLATION INSTRUCTIONS (To reduce the risk of fire, electric shock, or injury to persons):

1. We suggest installation by a licensed electrician.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, NEVER attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position. B). Place the wall switch in the "OFF" position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. This lamp maximum wattage is **12W**.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.
9. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.


Make installation:

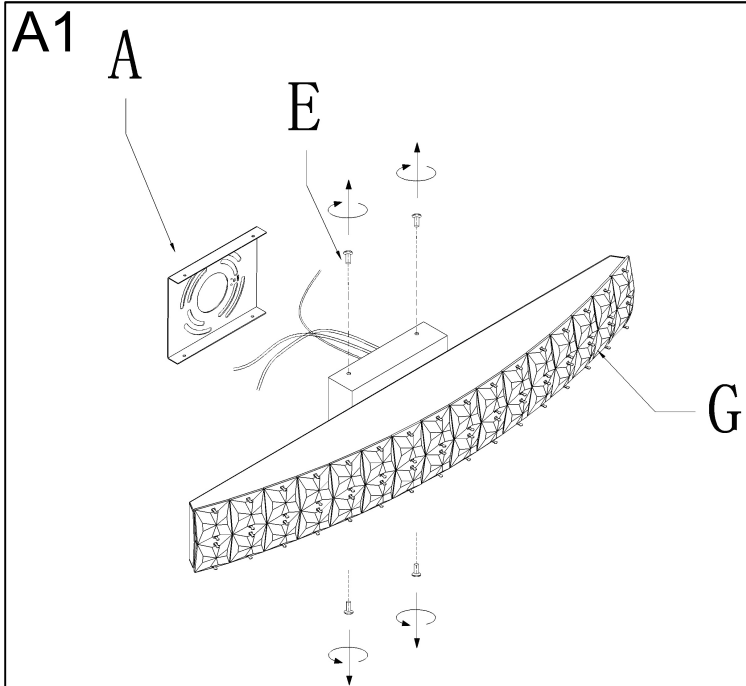


Step A1: Remove the mounting screws (E) from the ceiling plate (F) and then remove the mounting plate (A).

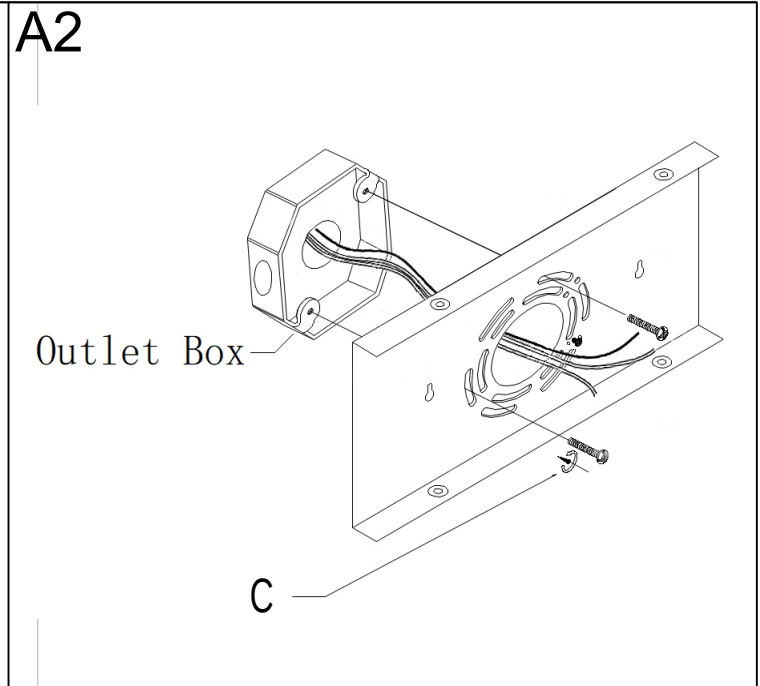

Step A2: Secure mounting plate (A) to the outlet box with mounting screws (C).

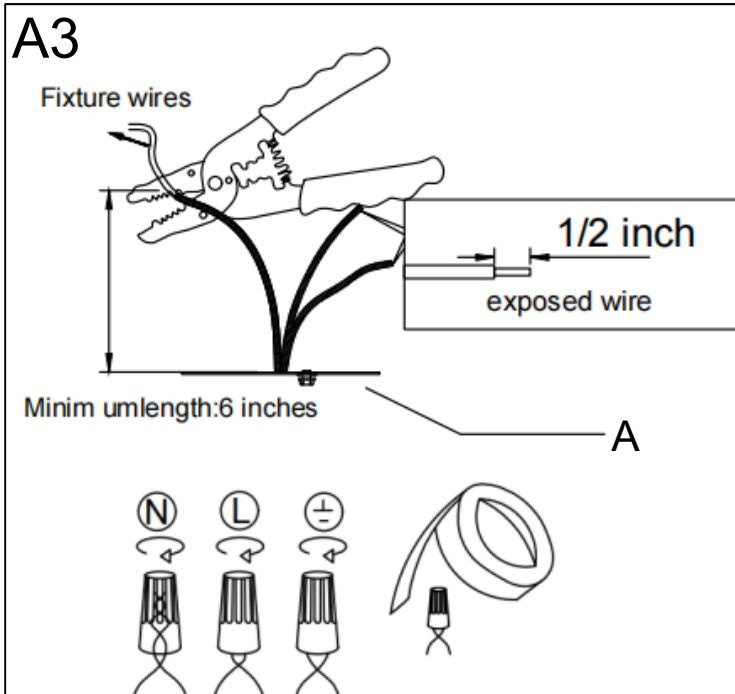

Step A3: If needed, shorten the fixture wires length. At this point, the remaining wire length measured above mounting plate(A) is at least 6"

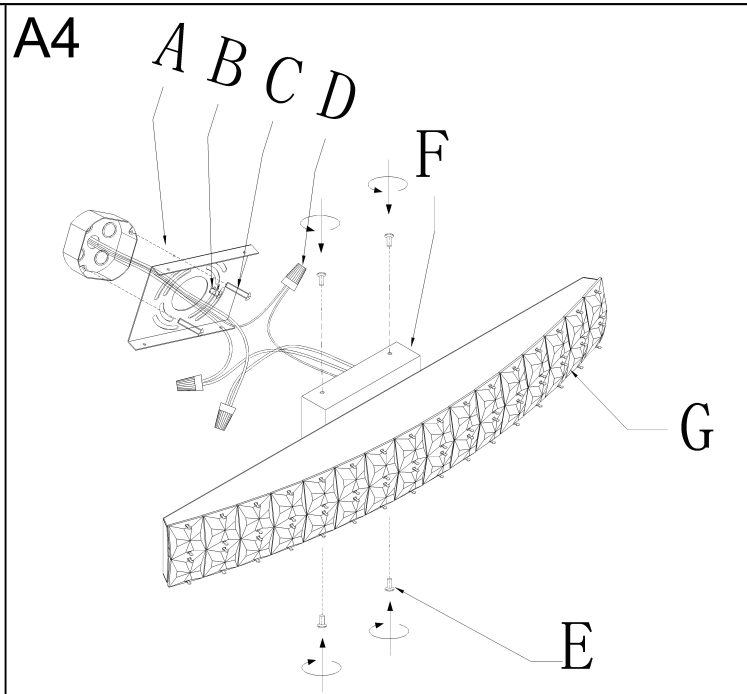

Step A4: 1)Make wire connections Connect wires as below wires connection shown. Use wire connector for connection. 2)Mount the lamp body(F) onto the mounting plate(A), secure screws(E) on the fixture base. Before using ,please first test for any leakage using an electric pen to ensure safety.

Connect ground wires according to the below

A

OUTLET BOX GROUND

FIXTURE GROUND

DIMPLES

GREEN GROUND SCREW

B

OUTLET BOX GROUND

FIXTURE GROUND

CUPPED WASHER

GREEN GROUND SCREW

Twist wires together with plastic wire connectors until tightly joined, and wrap each connector with approved electrical tape. Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.

Connect wires according to the below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear,Brown,Gold or Black without tracer	Clear,Brown,Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

Neutral Wire

ORDERING PARTS

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase.Be sure to use exact wording from illustration when ordering parts.

CLEANING

To clean, wipe the fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

