

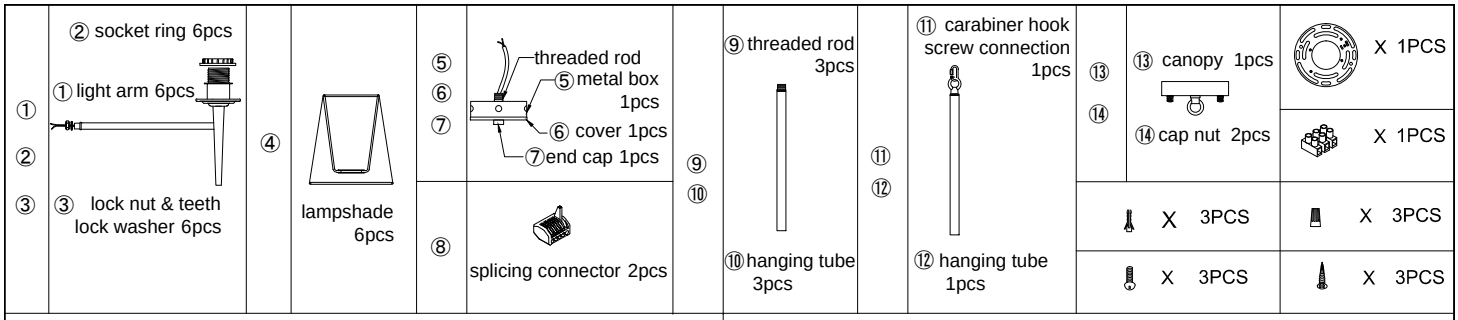






1.Loosen and remove out the end cap ⑦ and cover ⑥ from metal box ⑤.

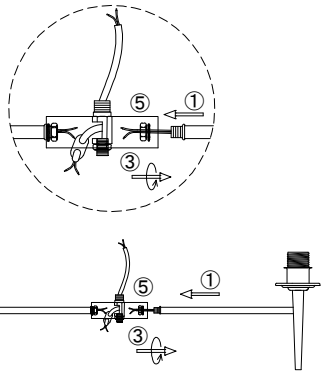


2. Install the light arm ① to the metal box ⑤ with lock nut & teeth lock washer ③. (don't tighten the lock nut until all light arms are ready installed to the metal box ⑤, adjust the arms even and rotate to fasten the lock nuts at last)

1.Pull the orange operating handle A to open the inlet hole, insert the wire B.
2.Press the operating handle A to finish wiring.(Note: one inlet hole can put 2 or 3 wires inside)




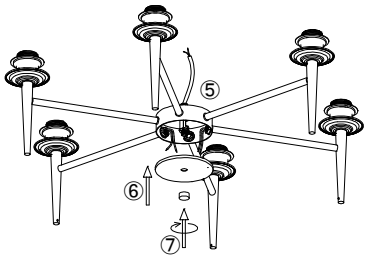


3.Connect all the wires by parallel with connectors ⑧(all live line-L use one connector, and neutral Line-N use another connector).
4. Close back the cover ⑥ to the box ⑤ with end cap ⑦.

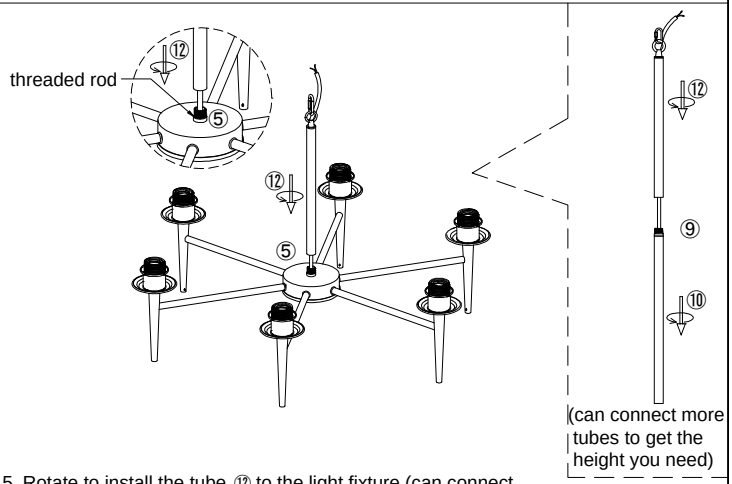

5. Rotate to install the tube ⑫ to the light fixture.(can connect more tubes to get the height you need)

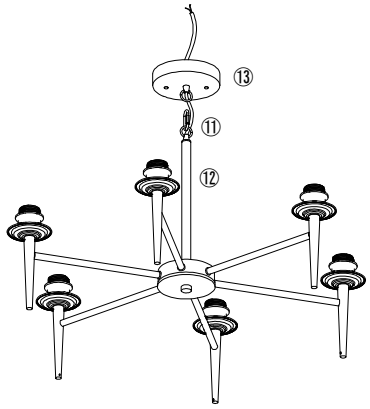

6.Hang the fixture to the canopy ⑬ with carabiner hook screw connection ⑪, let the wire go through the ring ⑪ and canopy ⑬.

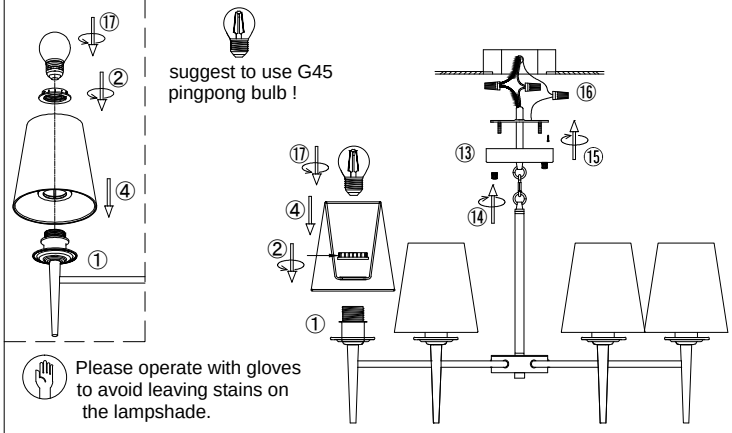

7. Install the bracket to the ceiling junction box with screw ⑮.
8. Connect the wire to your home line with cap connector ⑯.
9. Install the fixture to the bracket with cap nut ⑭.
10.Install the lampshade ④ to the fixture with socket ring ② and install the bulb ⑰. (bulbs are not included in the package)

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !