




The photograph may not match the reference exactly. Please read the product description to identify the finish.

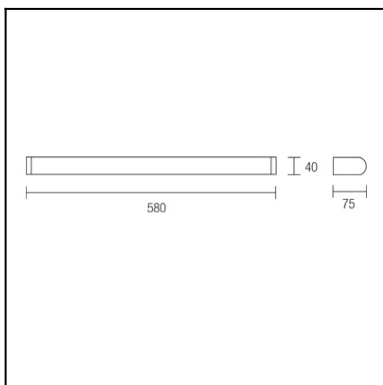

### TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	1 x G5 14W
Total power consumption (W):	15
Voltage / Frequency:	220-240V/50-60Hz
Units per box:	8
Net Weight (Kg):	0.82




### MATERIALS / FINISHES

**Structure material:** Extruded aluminium

**Diffuser material:** Polycarbonate

**Structure finish:** Chrome


**Diffuser finish:** Matt opal



$$\eta = 43,37\%$$

### GEAR

Gear included: Yes, electronic

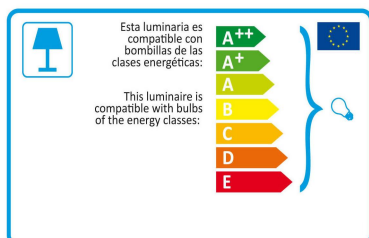


Click on image to download energy label

Luminaire		Measur.		Lamp		
Name	WALL LIGHT	Name	WALL LIGHT	Code	FLUORESCENT	
Line	Eulumdat			Number	1	
				Position		
Efficiency	49.05%	Coordinate system	CG	Total Flux	1200.00 lm	
Maximum value	100.89 cd	Position	C=180.00 G=54.00	Asymmetrical		
Rectangular Luminaire	Length	580 mm	Width	40 mm	Height	1 mm
Rectangular Luminous Area	Length	580 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.023200 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.005613 m2		
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		1200.00 lm		
Operator		Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	FLUORESCENT	FLUORESCENT - 22.40 W	1200.00	22.40	1	
C.I.E.	29 57 80 76 49	D DIN 5040				
F UTE	0.37 H + 0.12 T	B NBN				
		B11				
		BZ 7				

580mm x 40mm

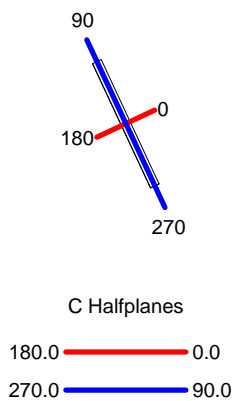

ULOR 12.01 %  
DLOR 37.05 %  
RN 24.47 %

