


#3512 Provence Plaza Fountain



Items Required For Assembly

Submersible Pump	(provided)
Vinyl Tubing	(provided)
Rubber Stopper	(provided)
Silicone Sealer	(provided)

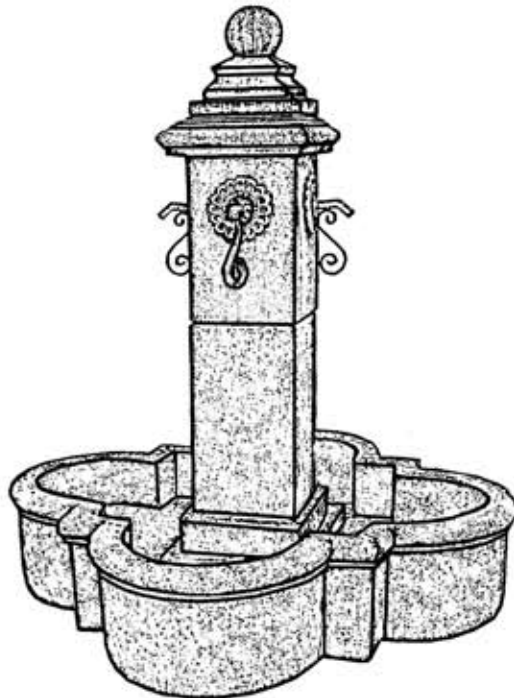

- 1) Place bowl (A) on a firm, level surface .
- 2) Carefully place the lower tower section(B) into the center of the bowl (A) as per the markings in the bottom of the bowl. Make sure that the opening at bottom of tower (B) is facing towards the PVC coupling cast into the side wall of the bowl.
- 3) Place the pump inside the lower tower section (B) so that it is lying on the bottom of the bowl (A) with the outlet facing up. Pull the electrical cord through the PVC coupling cast into the side wall of the bowl.
- 4) Slip one end of the 1/2" ID vinyl tubing over the hose barb coming out of the bottom of the upper tower section (D).
- 5) Place the upper tower section (D) onto the lower tower section (B). **DO NOT PICK UP THE TOWER SECTION USING THE IRON SPOUTS!** Make sure that the 1/2" ID vinyl tubing extends through the lower tower section (B) down to the pump. Through the access cutout, attach the 1/2" ID vinyl tubing to the outlet of the pump. Make sure that the tubing is not kinked so as to restrict water flow. You may cut the vinyl tubing if necessary.

- 6) Place the diffuser cap (E) over the water outlet at the bottom of the upper tower section. This will serve to smooth out the water flow.
- 7) Place the finial (F) onto the upper tower section (D).
- 8) Take the rubber stopper and apply silicone sealer in the center hole. Open the stopper and place around the electrical cord. Apply silicone sealer around the outside and along the inner cut of the stopper and insert fully into the PVC coupling in the side wall of the bowl.
- 9) Pour a some water into the bowl (A) so that the rubber stopper is submerged. Check to make sure that the water is not leaking through the rubber plug. If you find water is leaking, remove the rubber plug, and return to step 8.
- 10) Fill the bowl (A) with water so that the pump is completely submerged.
- 11) Plug the pump into a GFCI protected outlet.
- 12) Adjust the water flow using the flow control dial on the pump.
- 13) Place the access door (C) into the cutout of the lower tower section (B).
- 14) Place the cord cover (G) between the access door (C) and the inside side wall of the bowl so that the cord is covered and not noticeable. Enjoy your new fountain.

