

# R6032IS

60" x 32" x 19.25"

**GENERAL SPECIFICATIONS:**

Installation: Alcove

Material: Acrylic

Plumbed Weight: 129 lbs / 59 kg

Soaker Weight: 105 lbs / 48 kg


Average Fill: 34 gal to above jet level

Maximum Fill: 51 gal to overflow





Features integral front skirting, armrests & factory installed tile flange on 3 sides.

**NOTE:** Filling this tub to the maximum may require an above average size or dedicated water heater.

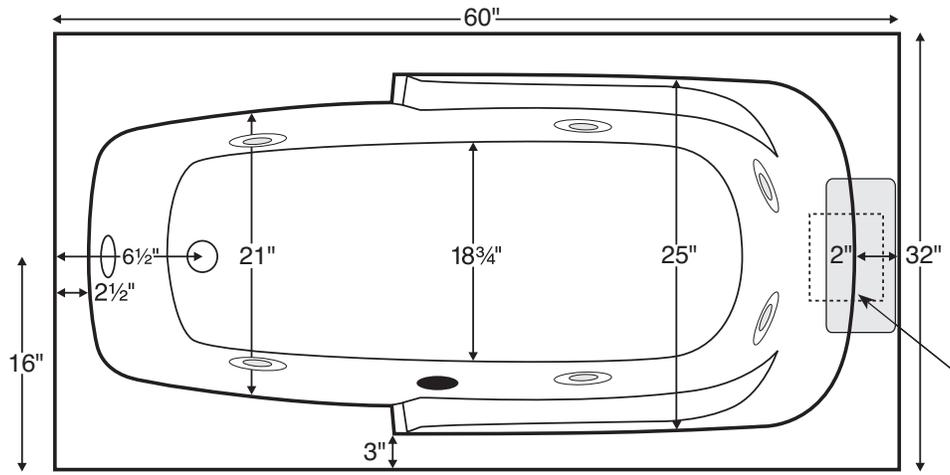

Shown with Whirlpool Package

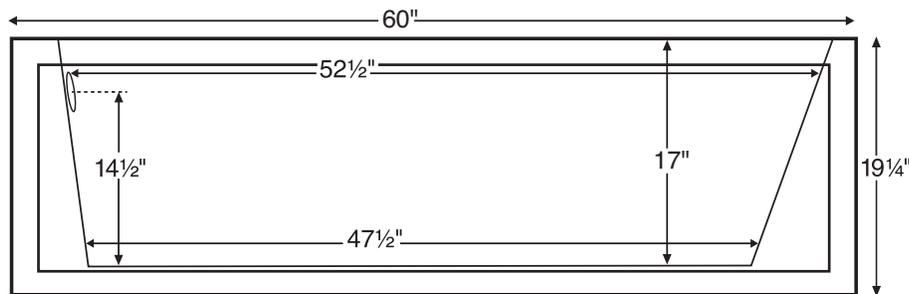

**ELECTRICAL SPECIFICATIONS**

- Required Electrical Service - 110 Volt
- Air Bath or Whirlpool - 1-15 amp GFCI
- Soaker - Inline Heater - 1-15 amp GFCI
- Air Bath - Inline Heater - 1-15 amp GFCI
- Whirlpool - Inline Heater - 1-15 amp GFCI

CSA Certified C/US; ANSI Z124.1  
CSA Certified C/US; ANSI 112.19.7

**IMPORTANT ORDERING & INSTALLATION INFORMATION:**

- Before ordering or installing, please consider future access to all equipment.
- Please measure tub on-site before building tub decking.
- Add bedding compound to fully level and support bottom of tub.
- Tubs equipped with an air bath or a pre-leveled foam base are designed to rest on the floor without bedding compound, provided the floor is level.
- Overall tub height is increased by approx. 2-3" when tub is equipped with any air bath package.
- Jet, pump & blower locations are predetermined and cannot be changed.
- Suction and control locations may vary.
- Specifications and configurations are subject to change without notice.
- Measurements are +1/2" and are subject to change without notice.
- Measurements herein supersede all others published prior to publication date shown below.

| PACKAGE   | PACKAGE CONTENTS   | PART #   |
|-----------|--|----------|
| Soaker    | Soaking bath - No jets. Includes an integral front skirting and 3-sided integral tile flange                 | R6032ISS |
| Air Bath  | 12 air jets, heated air blower, integral front skirting, 3-sided integral tile flange, pre-leveled foam base | R6032ISA |
| Whirlpool | 6 point-massage jets, 1-bhp pump, integral front skirting and 3-sided integral tile flange                   | R6032ISW |

|   |
|---|
| <p><b>COLOR AND FINISH OPTIONS</b><br/>NOTE: Part codes for all options listed in parenthesis.</p> <p><b>Color Upgrade:</b> Biscuit (RCOLOR)</p> <p><b>STANDARD OPTIONS</b><br/>NOTE: Part codes for all options listed in parenthesis.</p> <p><b>Quick Ship / Priority</b><br/>Soaker &amp; Whirlpool (RQSHIP)<br/>Airbath (RQSHIPA)</p> <p><b>Inline Heater</b><br/>For Whirlpool (RHTI)<br/>Heater with Recirculating Pump<br/>for Soaker &amp; Air Bath (RHTISOAK)</p> <p><b>Lift and Turn Drain &amp; Overflow</b><br/>Chrome (RWOC)<br/>Brushed Nickel (RWOBN)<br/>White (RWOW)</p> <p><b>Pre-Leveled Foam Base</b><br/>5' Tubs (RPLFOAM)<br/>5.5' &amp; 6' Tubs (RPLFOAM2)</p> |
|---|



Front view of the integral skirt.