




# T-3 DONUT


## HANDHELD EQUIP



USER MANUAL



## I. ILLUSTRATION&OPERATION

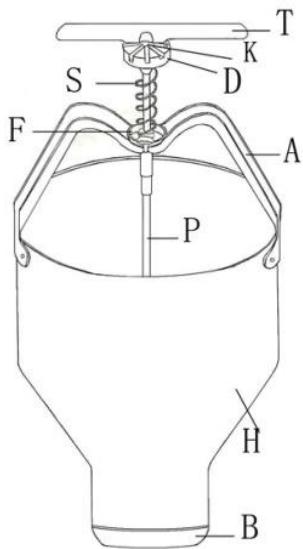

**T --- HANDLE**

**K --- KEY**

**(FIX THE WEIGHT CHOOSD)**

**D --- DIAL (6 SIZES)**

**S --- SPRING**

**(PRESS DOWN TO ADJUST K)**

**F --- FIX KEY**

**A --- ARCH**

**P --- PLUNGER**

**H --- HOPPER**

**B --- BOTTOM**

1. Read equip.'s illustration to know more about it.
2. If you want to remove the plunger, see part III.
3. Clean it before use, make sure it can be used freely.
4. Set your desired weight by adjust its dial, see part II.
5. Pre-mix doughnut mix with mixer.
6. Test its shaping condition. Fill hopper with pre-mix doughnut.  
Hold this equipment above your container (such as mixing bowl). Then press handle T to shape & cut doughnut from the hopper, doing this for several times to eject all of the air

out of the valves.

7. Holding the bottom of the hopper about 1 1/2 inches from electric or gas fryer, then operating the equip to release the doughnut which ready to be fried.

! Keeping Hopper well filled to prevent air from getting into the valve mechanism.

8. If the donuts fried is not the size you want, adjusting the dial and repeat step 7.
9. Keep cutter cleaned as soon as possible after use. To better it, please oil lightly it after use.

## **II. ADJUST THE DIAL**

This donut handheld equip can make 6 kinds of weight of batter by adjusting its dial. Push the dial down from the knob to release it from the peg. Then rotate the dial to your desired weight. After this, release the dial, sliding the peg into the slot.

! DO NOT try to change the dial setting without first depressing the spring to release the selector peg.

! DO NOT force or use any tool on the dial. It operates freely when the instructions are followed.

### **III. REMOVE PLUNGER (see Illustration point F)**

Donut equip.'s plunger of depositor is locked in place with a peg key, held in place by a operating spring. This key is fixed to the release tab, which is located under the lower end of the spring. By lifting on release tab, the peg key can be raised out of its slot in hopper arch; then by rotating its release tab and upper bearing 1/2 turn, the square key on upper bearing can be cleared through the slot in the hopper arch. The plunger assembly may then be lifted up and removed from the hopper.

Thanks for order this donut equipment from us!

If you have any question during use it, contact us or sale agent!