

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.


CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.














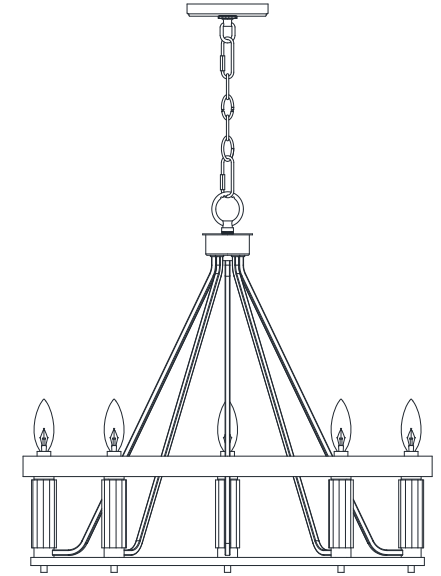


NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
If the cord is damaged, the lamp shall be destroyed

Product Dimensions: 26"L X 26"W X 25.5-84.5"H



Part List and Hardware List

| PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY |
|-------|-------------------------|---|----------|-------|-------------------|---|----------|-------|--------------------|---|----------|
| A | mounting bracket |  | 1X | G | Closable Link |  | 2X | K | nut |  | 5X |
| B | machine screw 8/32*25mm |  | 2X | H | chain |  | 1X | L | Square tube circle |  | 1X |
| C | wire nut |  | 3X | I | fixture loop |  | 1X | M | crystal tube |  | 5X |
| D | canopy |  | 1X | J | Lamp body bracket |  | 1X | N | flat iron ring |  | 1X |
| E | collar loop |  | 1X | | | | | O | drivepipe |  | 5X |
| F | Canopy Nut |  | 1X | | | | | P | bulb |  | 5X |

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help.

NOTE: PLEASE USE TYPE "B" BULB MAX 40-WATT OR LED BULB MAX 9-WATT, THERE ARE 5PCS LED 4-WATT BULB IN THE BOX

Step 1:
First take out the lamp accessories; adjust the lamp body bracket (J) into 5 equal parts, then place the lamp body bracket on the Square tube circle (L); pay attention to the position of the hole, and use the nut (K) to fix the Square tube circle and the lamp body bracket; finally loosen the drivepipe (O) from the lamp



Step 2:
install the crystal tube (M) on the lamp holder; then use the flat iron ring (N) to cover the lamp body bracket and clamp it on the crystal tube (M); then put the drivepipe (O) into the crystal tube to fix the crystal tube and the flat iron ring

Step 3:
Lock the collar loop (E) with the Canopy Nut (F); then connect the Closable Link (G) to connect the collar loop (E) to the chain (H), making sure the lead goes through the entire chain (H). Secure the fixture loop (I) to the top threaded stem of the Lamp body bracket (J)

Step 4:
Fix the mounting bracket (A) to the outlet box with machine screw (B).

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help.

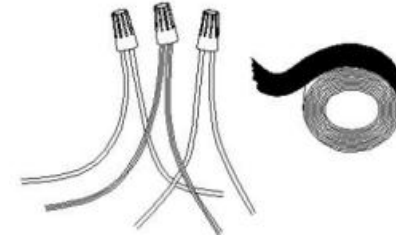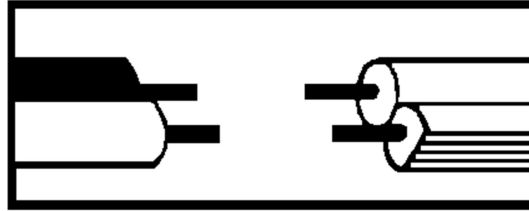

Step 5:


Make wire connections, with wire nut(C)

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections


Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

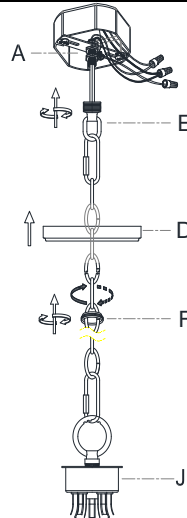

Step 6:

Raise the canopy(D) to the ceiling and then secure it by the Canopy Nut(F) to the collar loop(E).

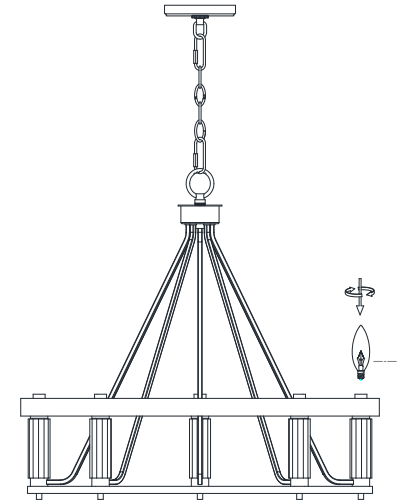

Step 7:

Install bulbs(P). Be sure to use light bulb(P) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.