

Installation Instruction

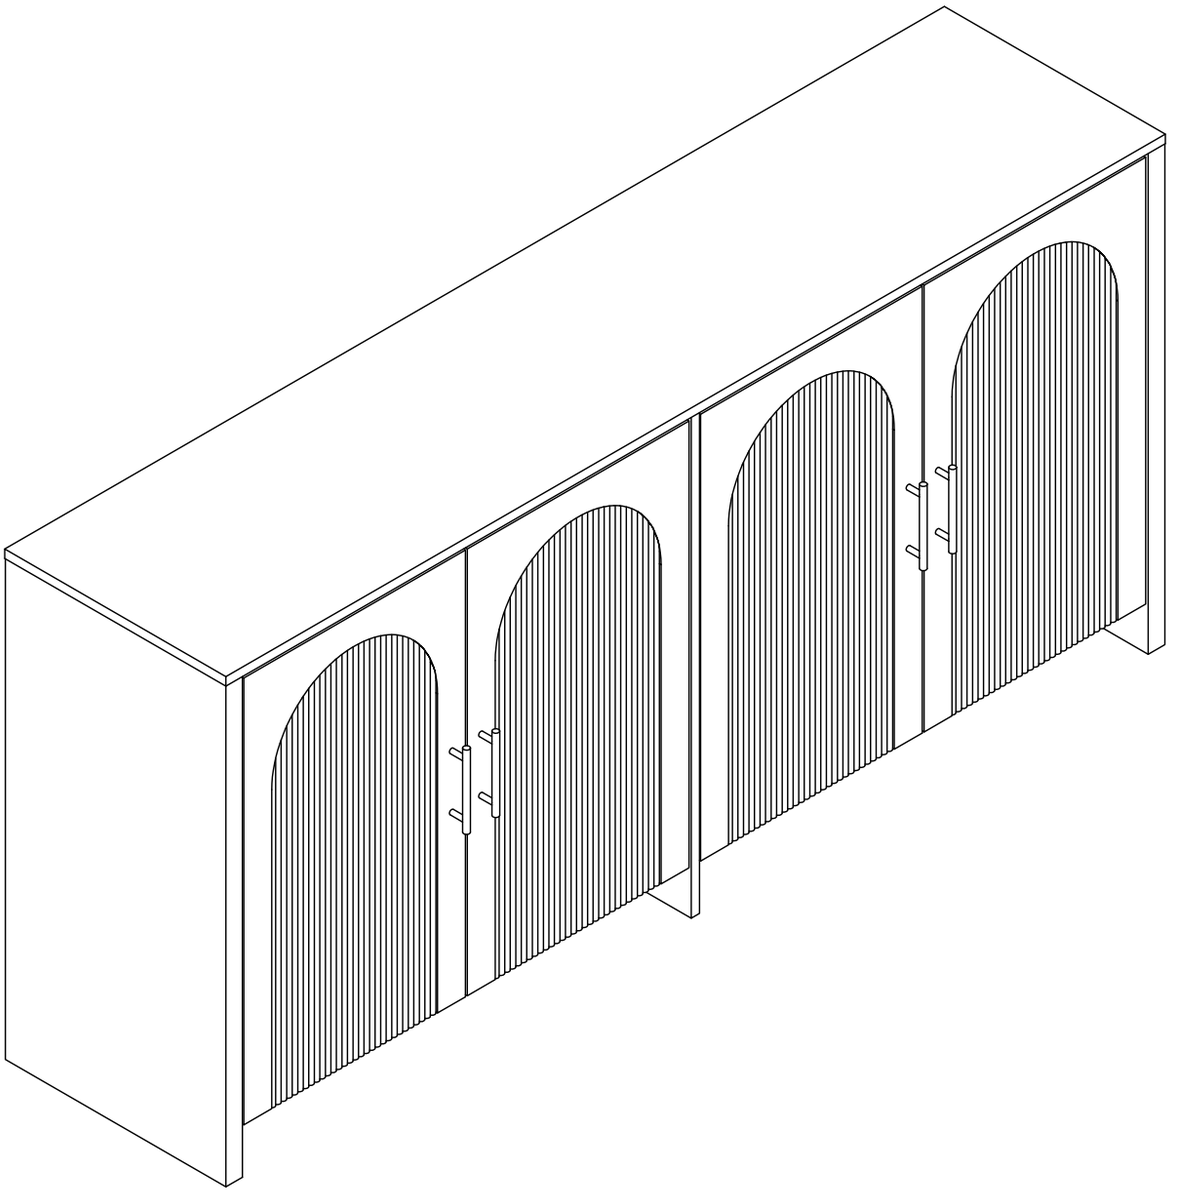

Assembling

What you need


- Use the packaging carton as a working surface to prevent product damage during assembly
- Phillips head screwdriver



Weight Limitation




100 lbs table top | 35 lbs per

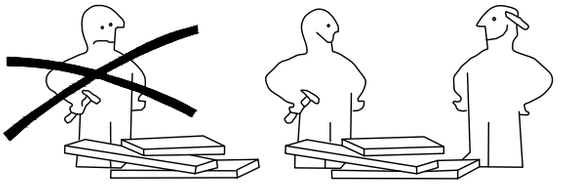

What' included

Code	Description	Qty
A	Cam Bolt M6X35MM	22
B	Cam Lock15X10MM	22
C	Wooden Dowel M8X30MM	10
D	Wooden Dowel M8X50MM	2
E	The screw M3.5X14MM	64
F	The screw M3.0X14MM	16
G	Screw M4X40MM	2
H	Screw M3.5X12MM	2
I	Ron absorption	4
J	Conical metal handle	4
K	Sheet iron	8
L	Nylon Strap	2
M	Anchor	2
N	Hole position sticker	14
O	Hinge	8
P	Foot nail	6
Q	The back button	16
R	Cam Bolt M4X18MM	8
S	Shelf Holder	8

The Hardwares

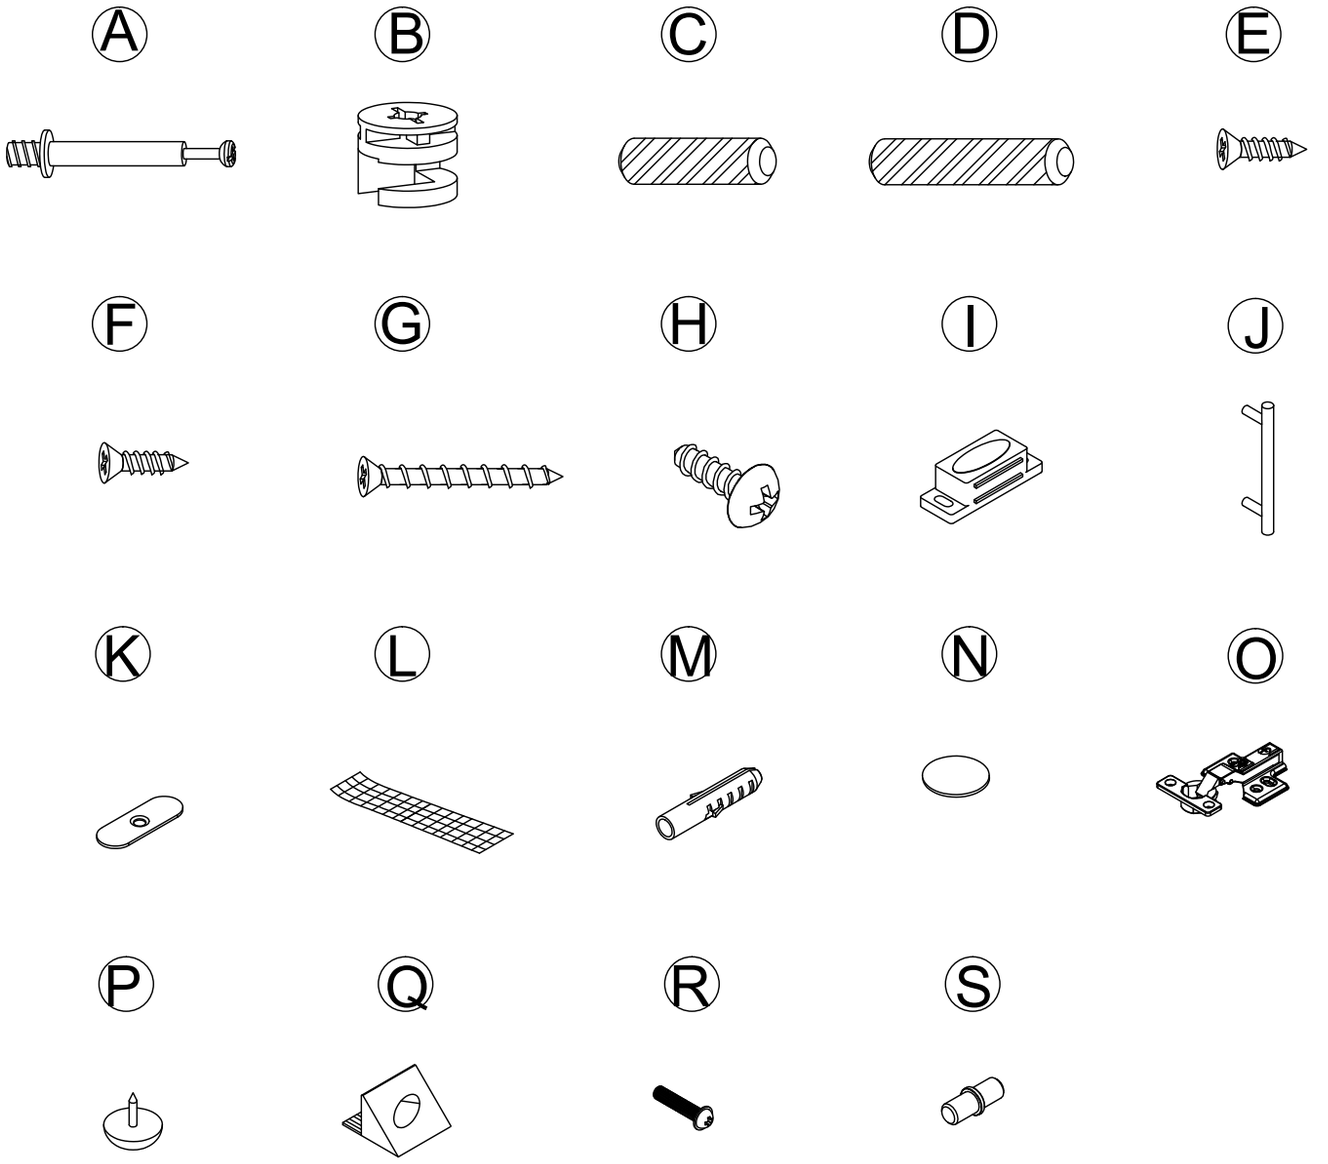


IMPORTANT:
1.Do not tighten bolts / screws completely until all bolts / screws are lined up and inserted into holes.
2.Do not over tighten screws and bolts to avoid stripping
3.Please use hand tools to assemble this product, you can also use power tools (please use power tools carefully)


Included Accessories


Code	Description	Qty
1	Cabinet Top	1
2	Left Bottom Panel	1
3	Right Bottom Panel	1
4	Left side board	1
5	Right side board	1
6	Middle Vertical Plate	1
7	Movable laminated plate	2
8	Backboard	4
9	Back tie	2
10	Left ventricular endplateeft	2
11	Right ventricular endplateeft	2

The Accessoriess

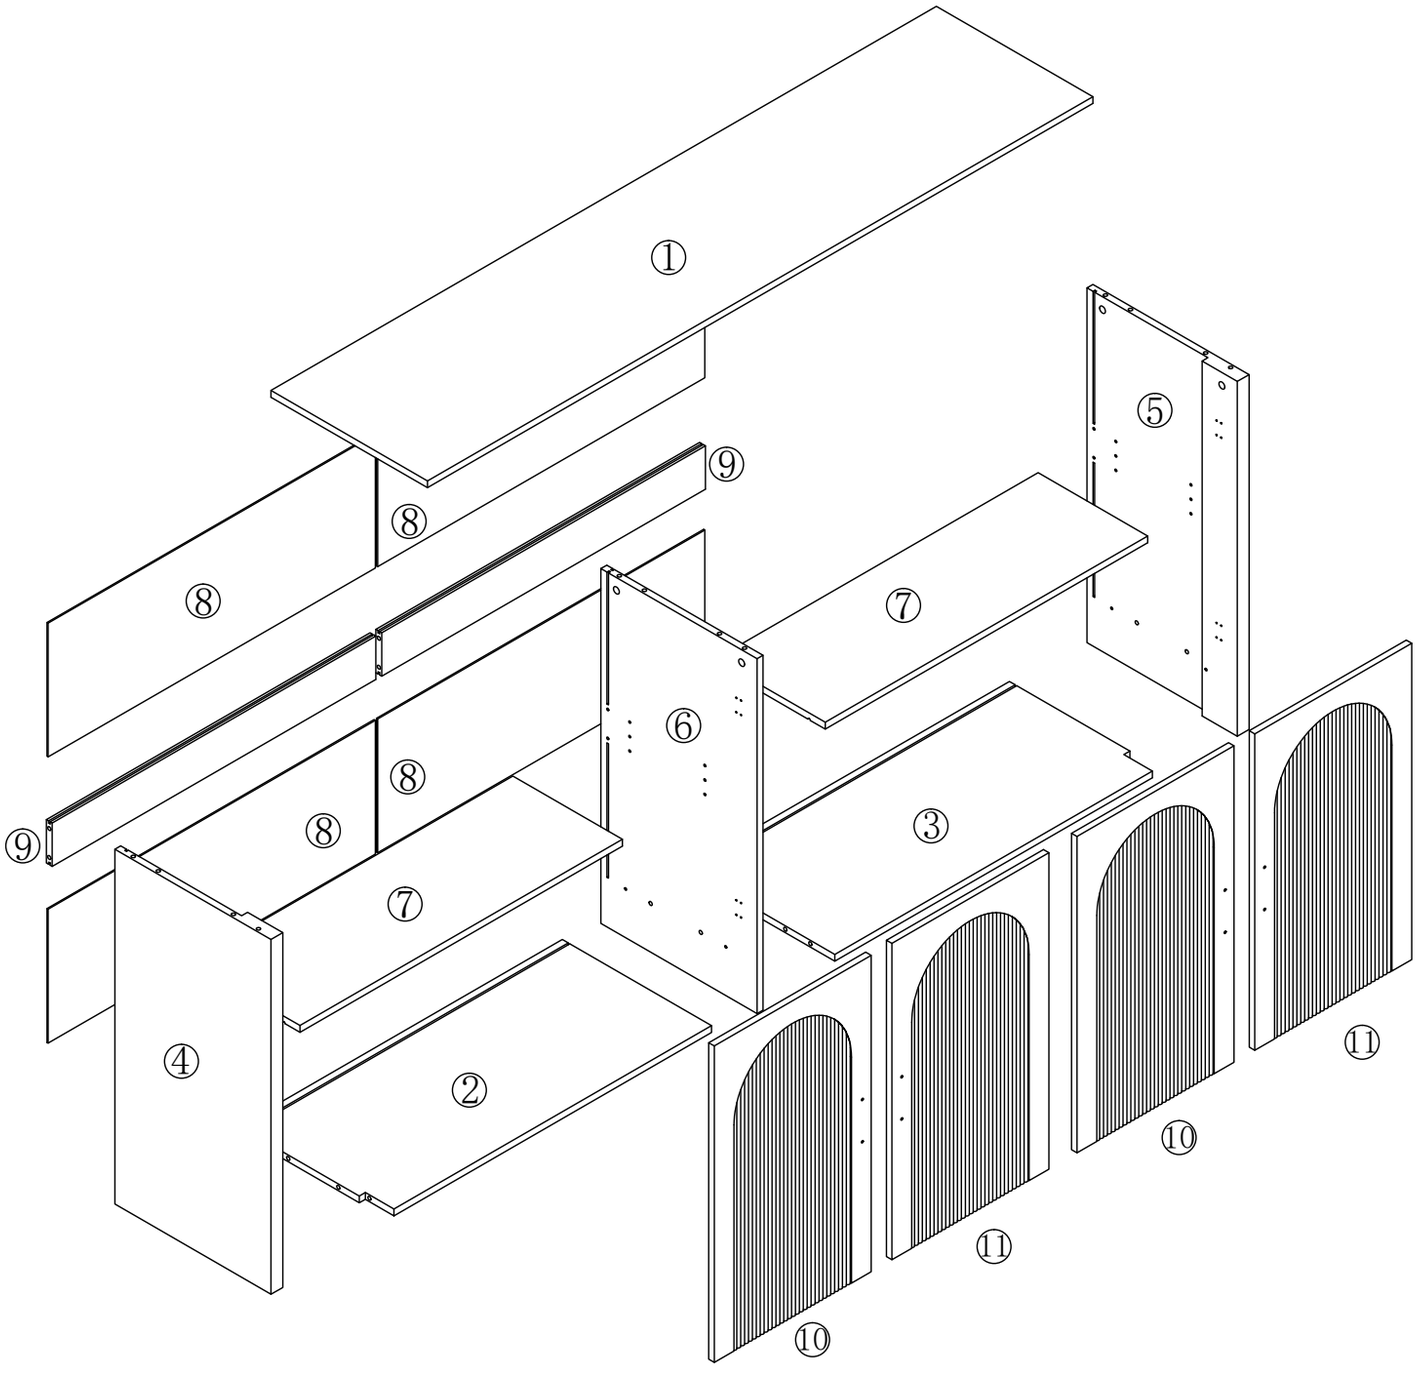


Step 1

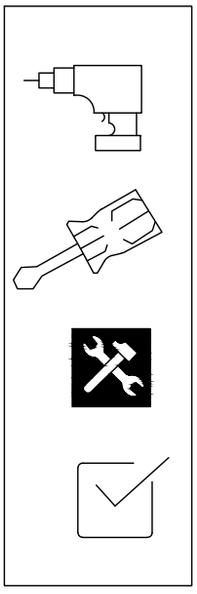

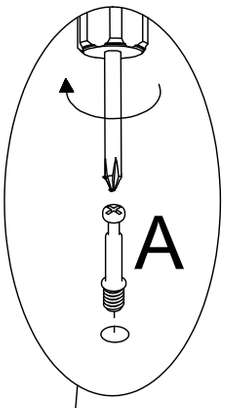


A	×6





F	×8



I	×4




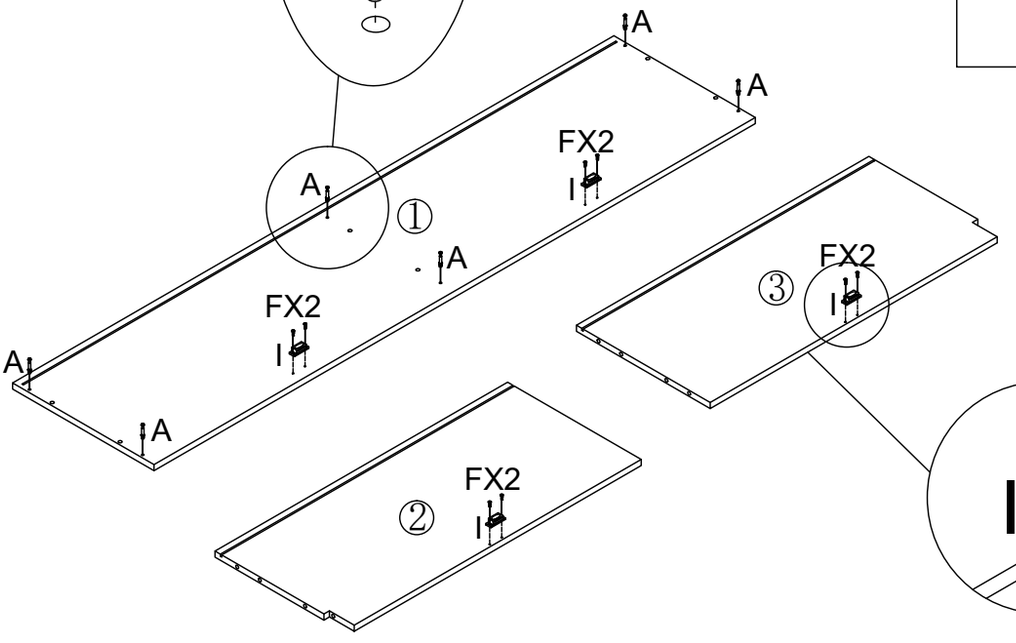





Step 2

A	×16




P	×6




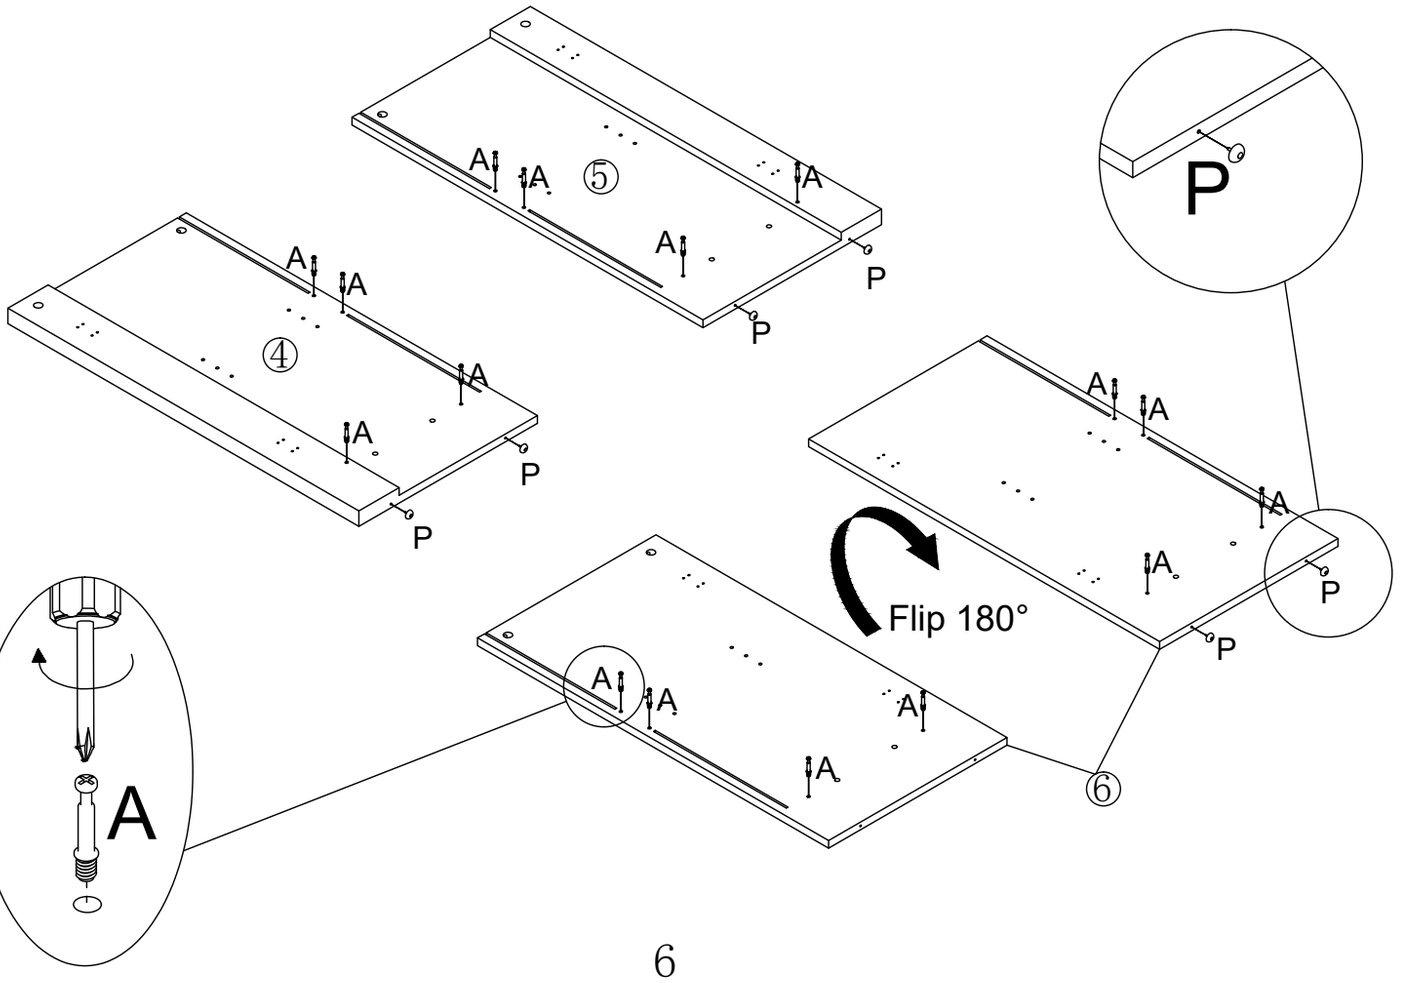


Step 3

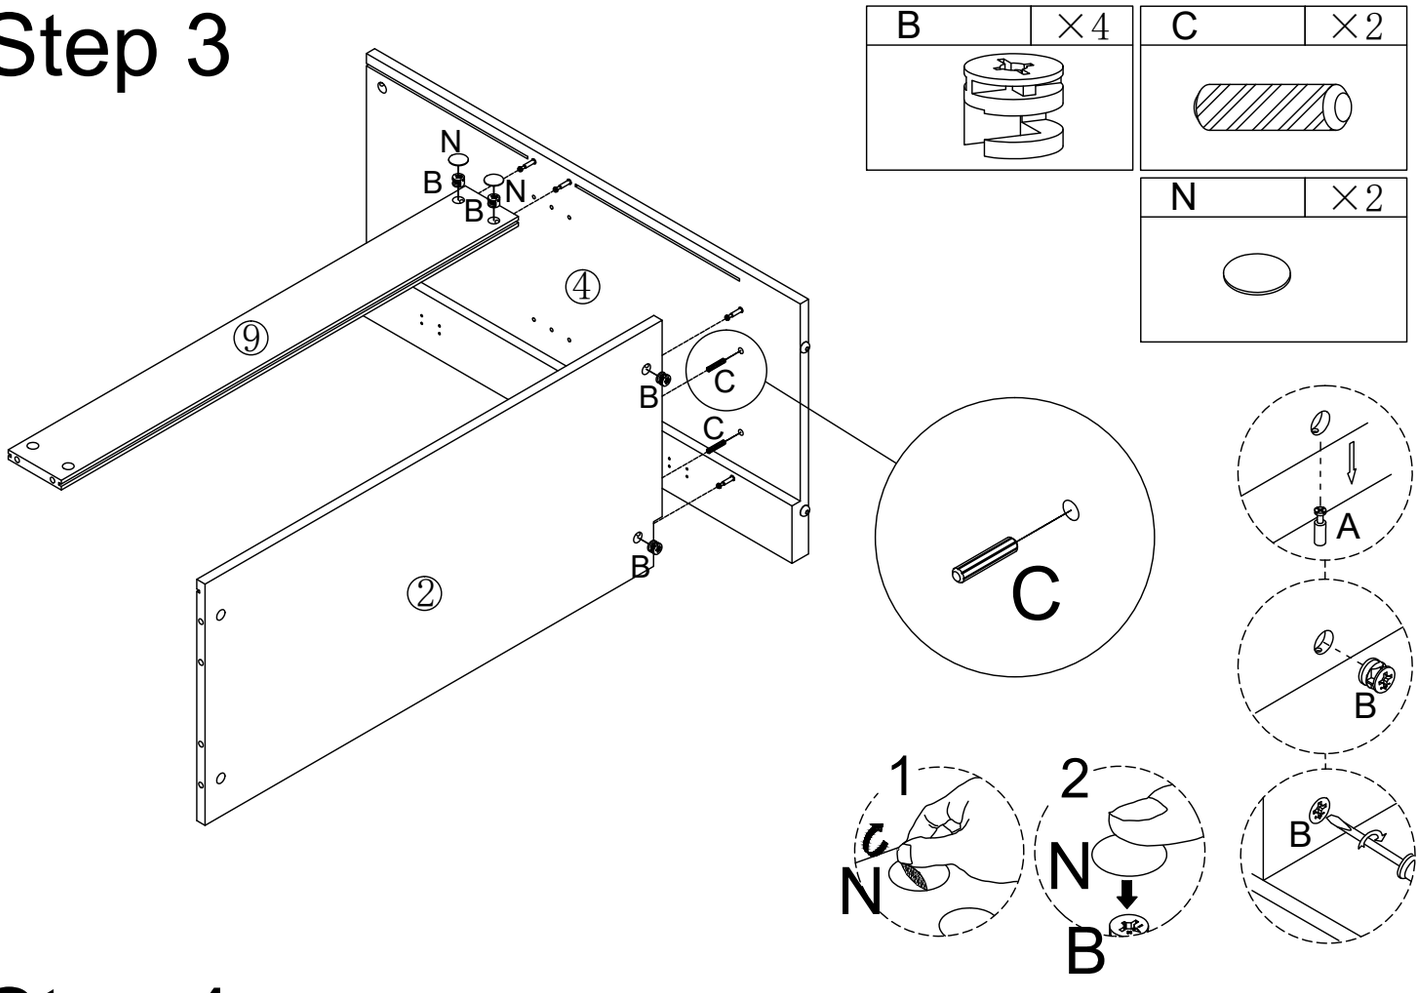

Step 4

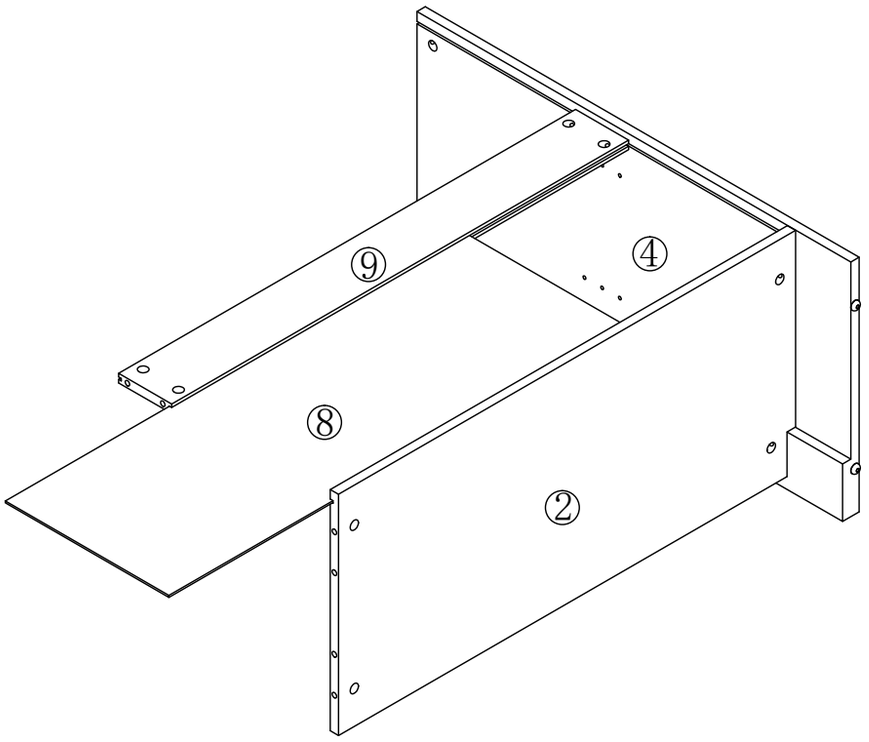


Step 5

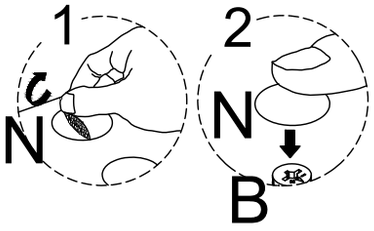



B	×4

D	×2



N	×2



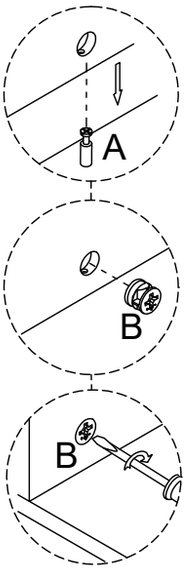



Step 6


B	×4




N	×2




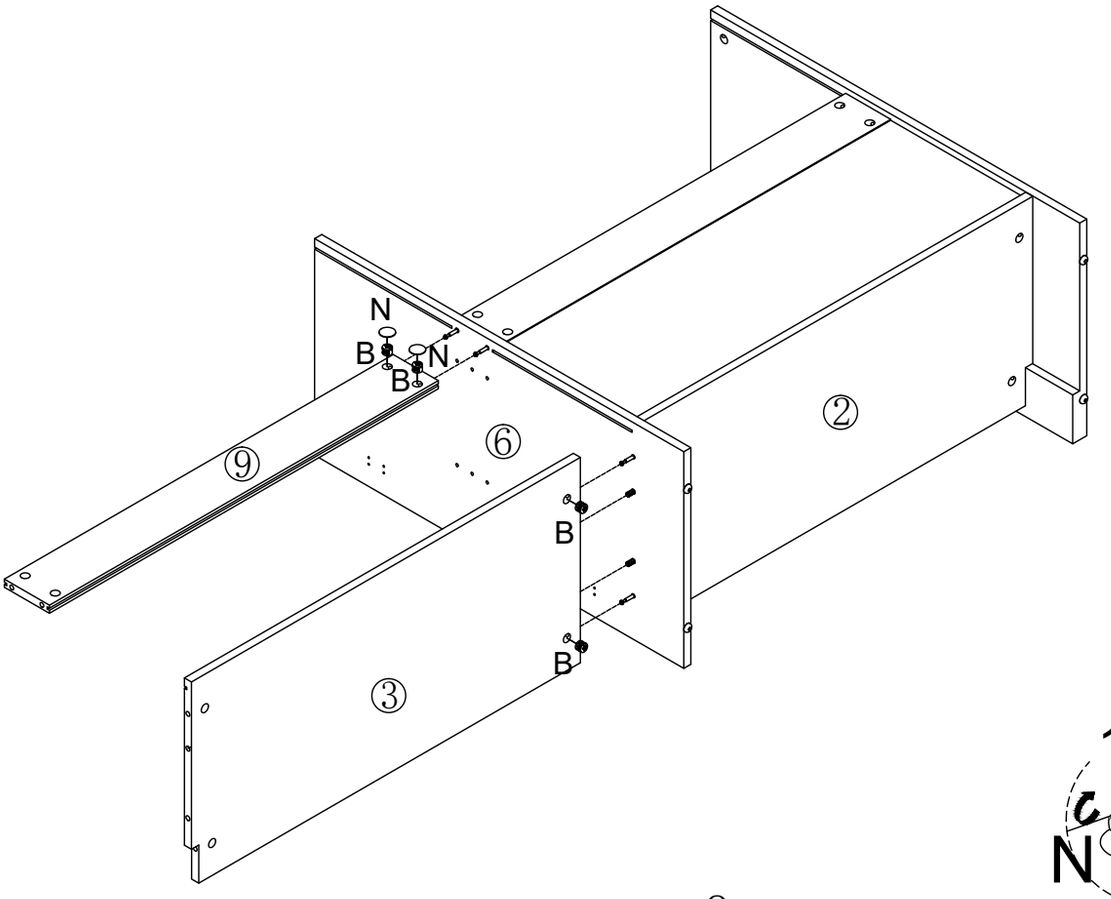

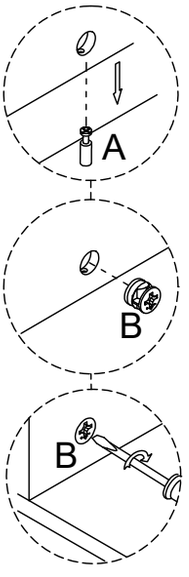


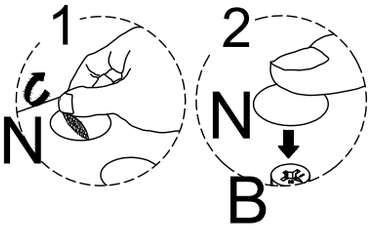


Step 7

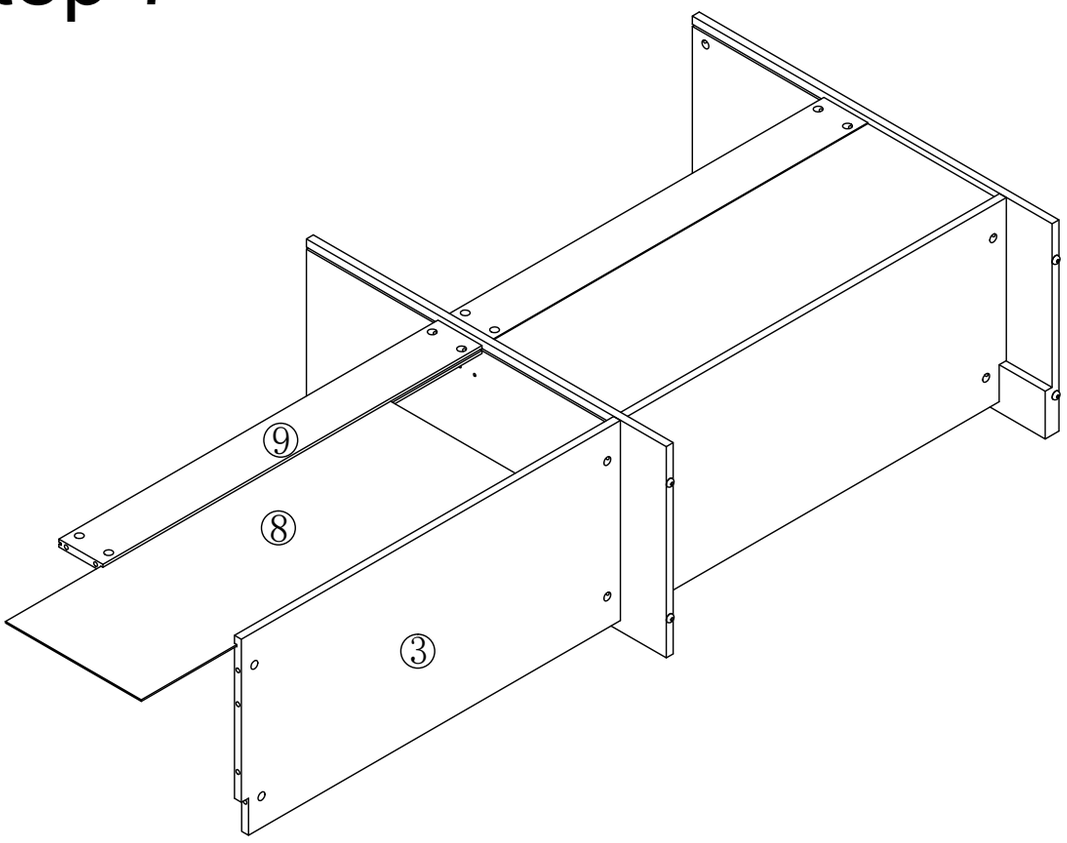


Step 8

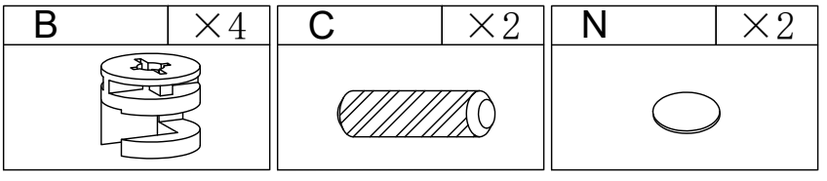

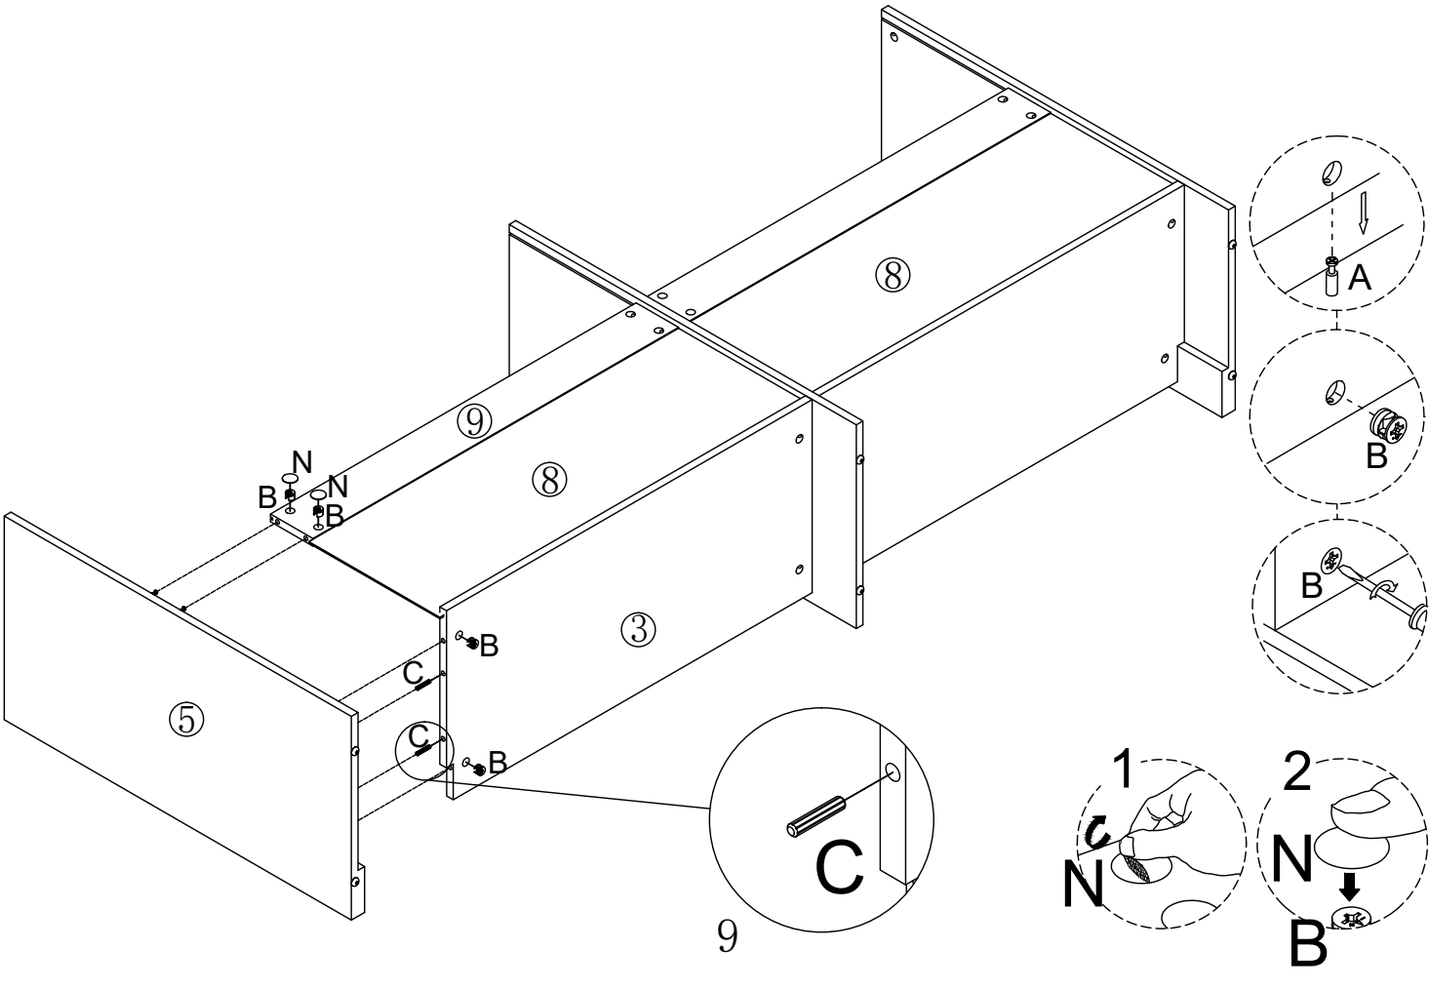



Step 9

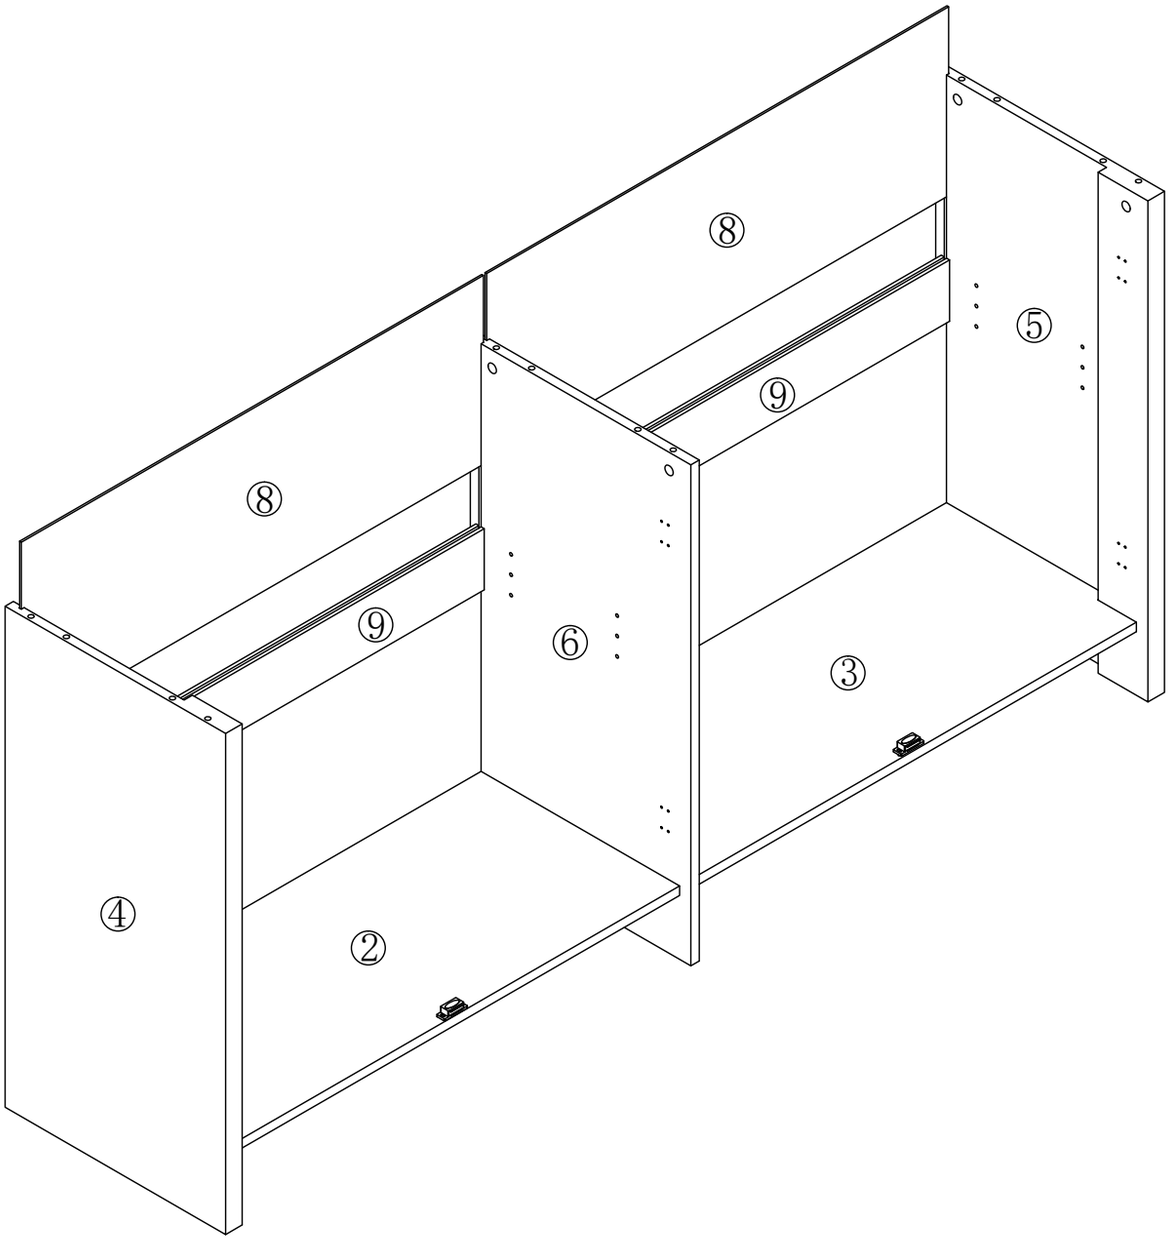


Step 10

B	×6	C	×6	N	×6

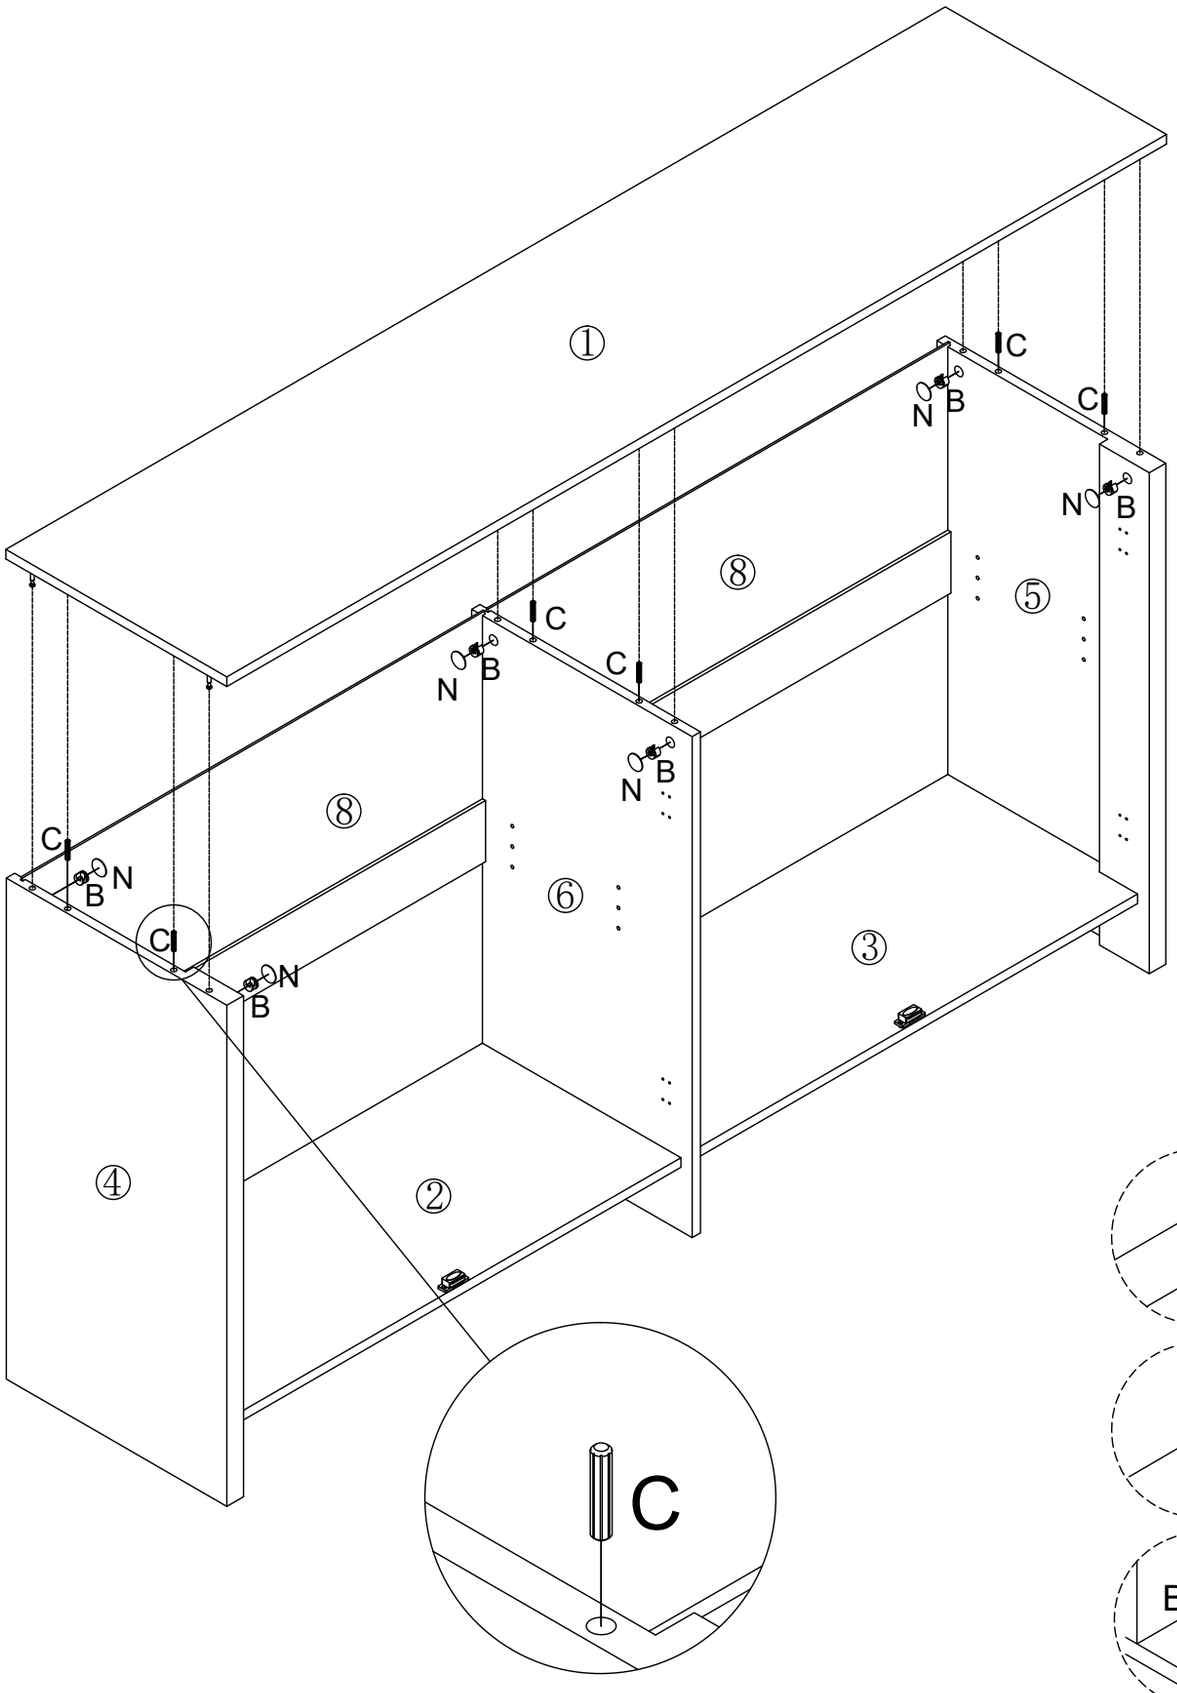

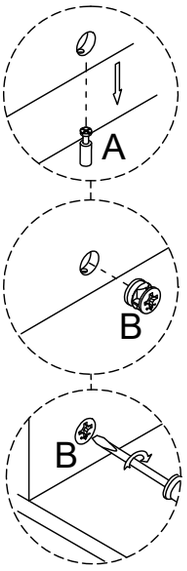

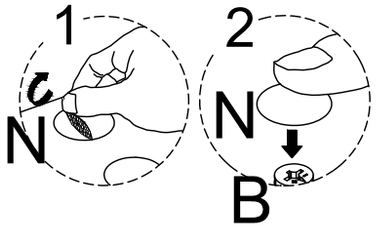


Step 11


E	×16




H	×2





L	×2



Q	×16




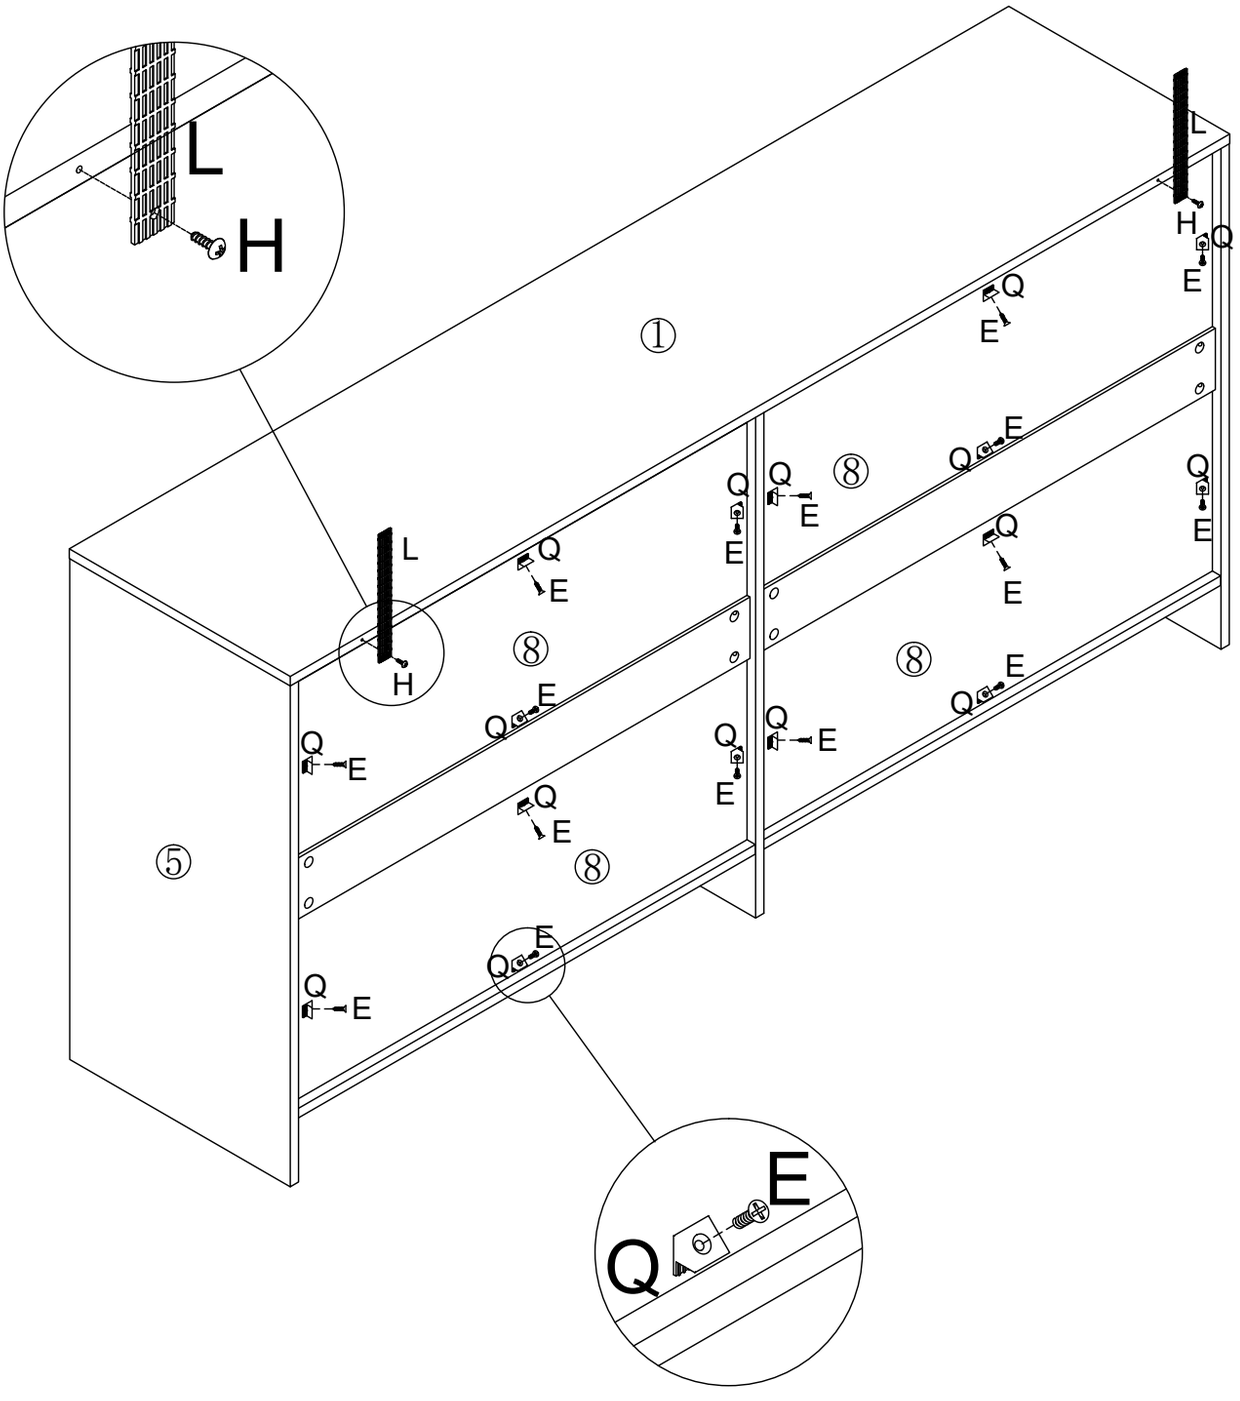

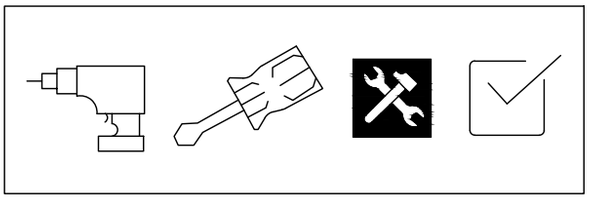


Step 12

S	×8
	

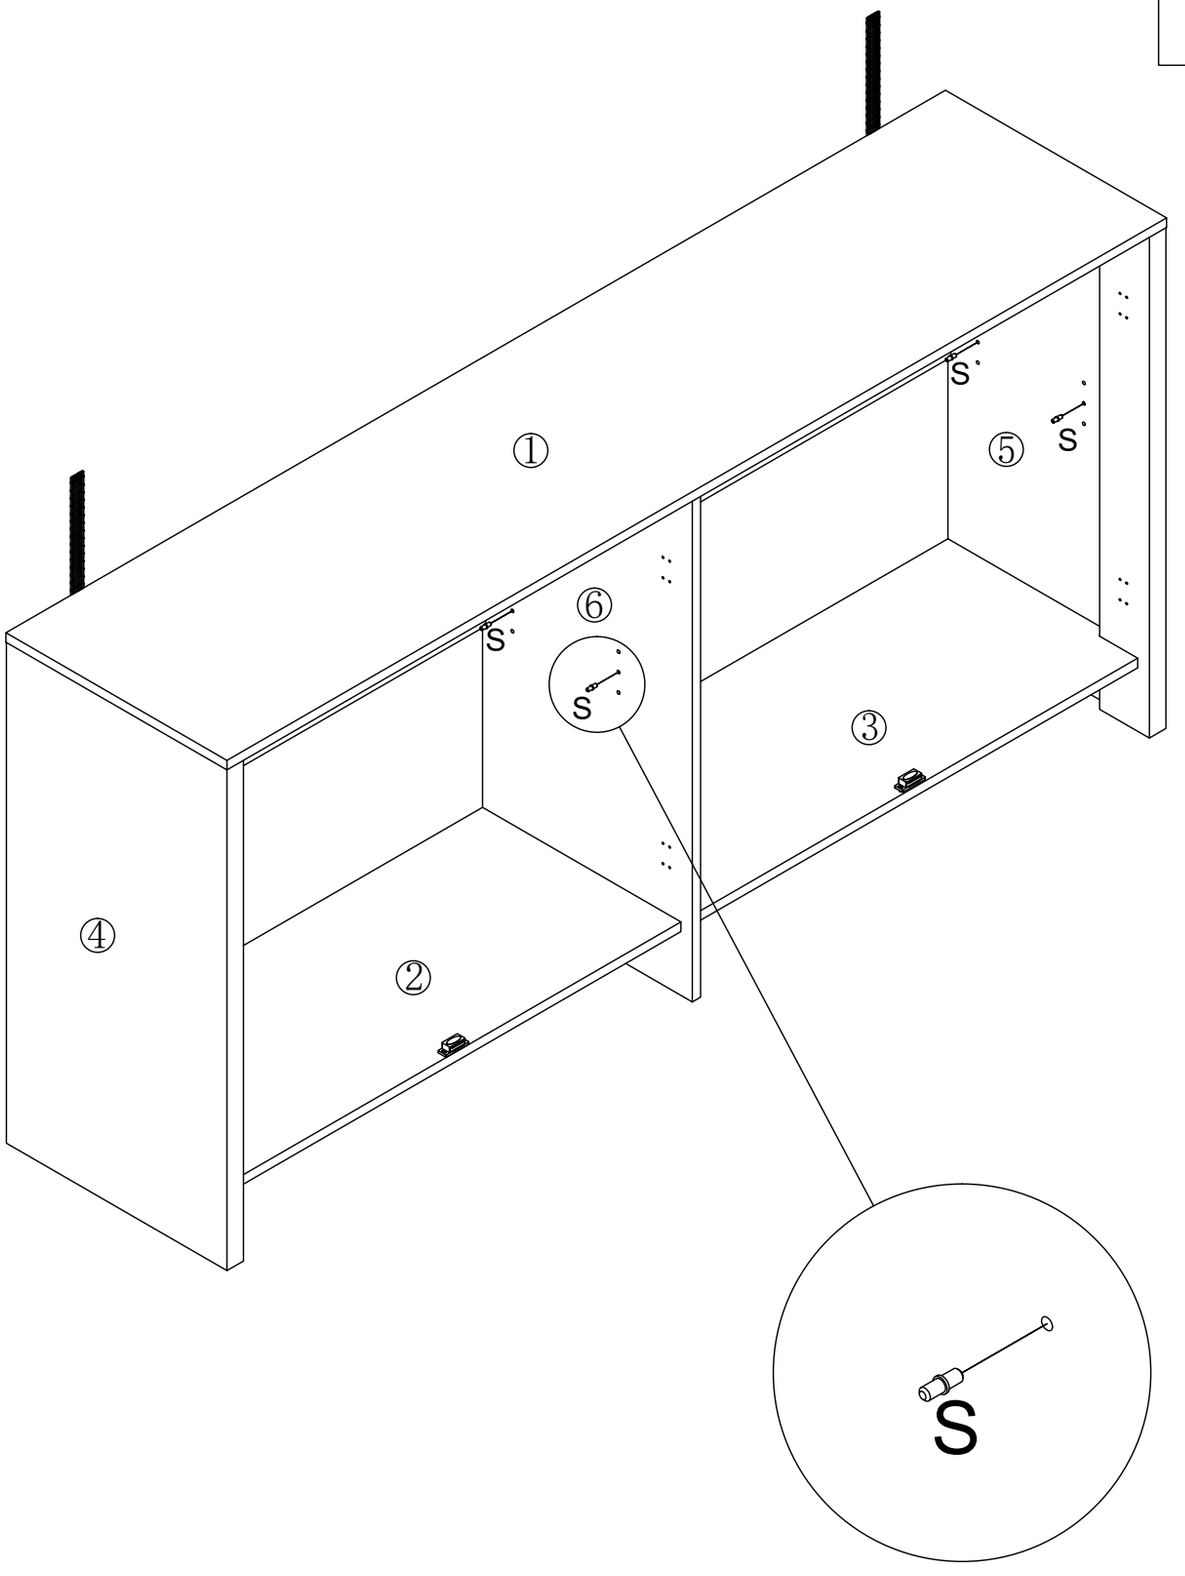


Step 13

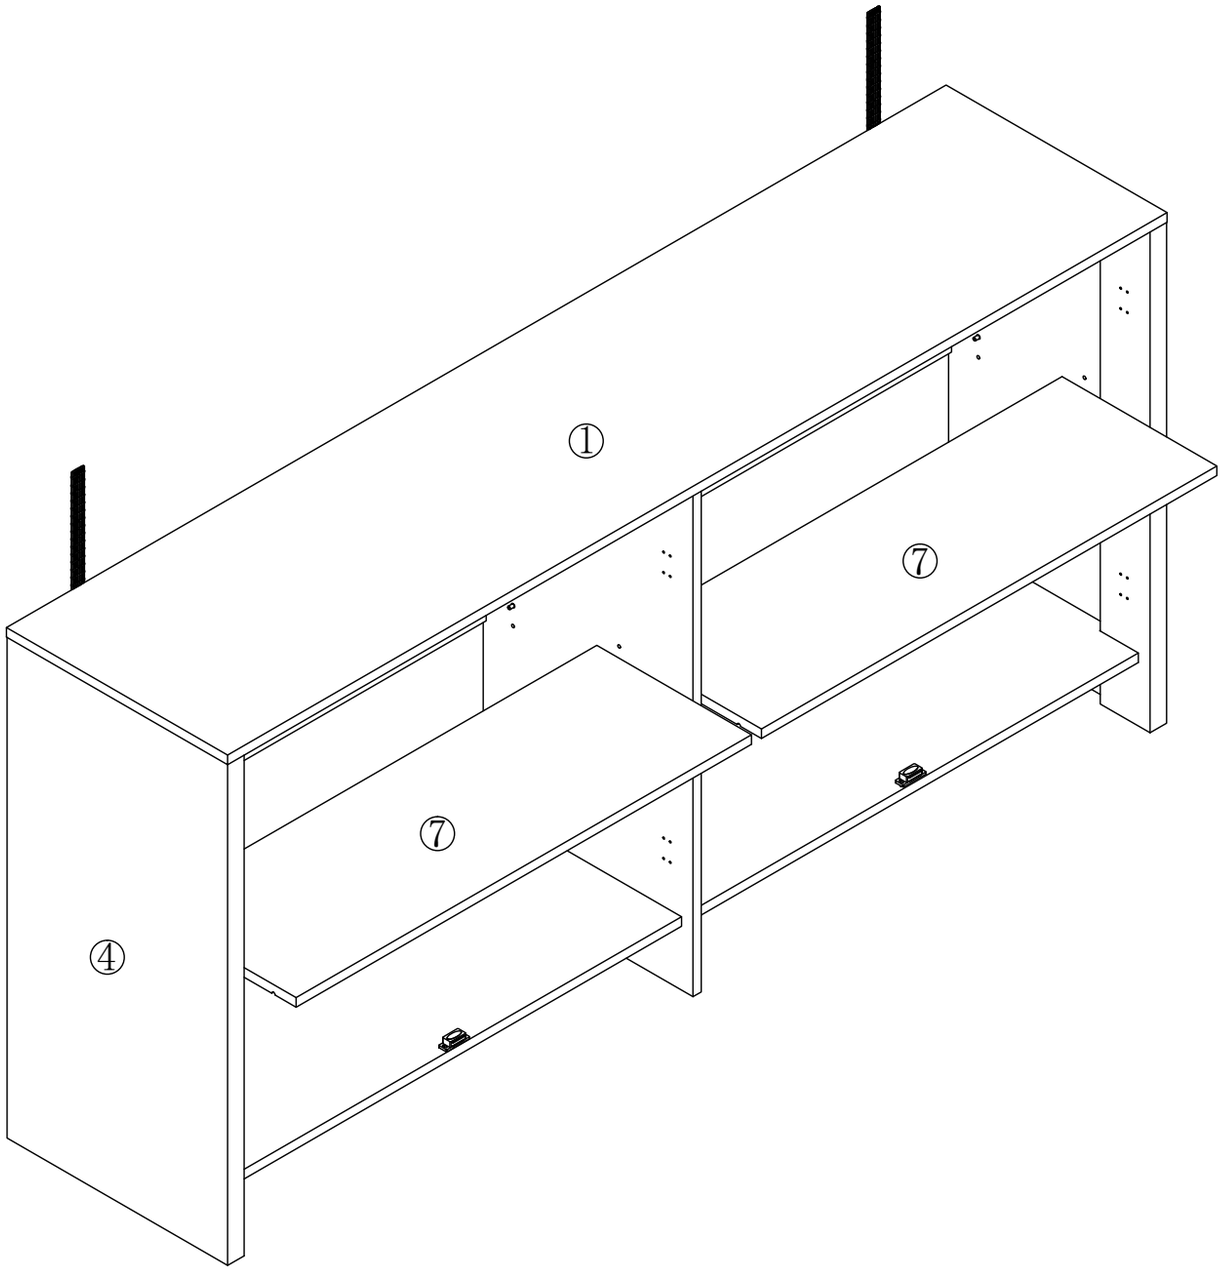


Step 14


E	×16	J	×4	K	×8
3.5×14					
F	×8	O	×8	R	×8
3.0×14					

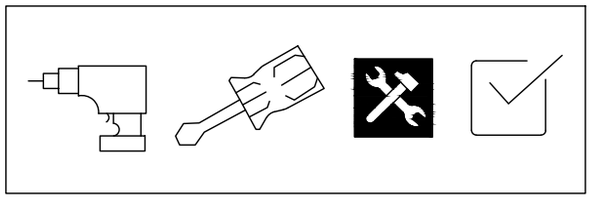

Please note the dimensions of screw E and screw F in this step.

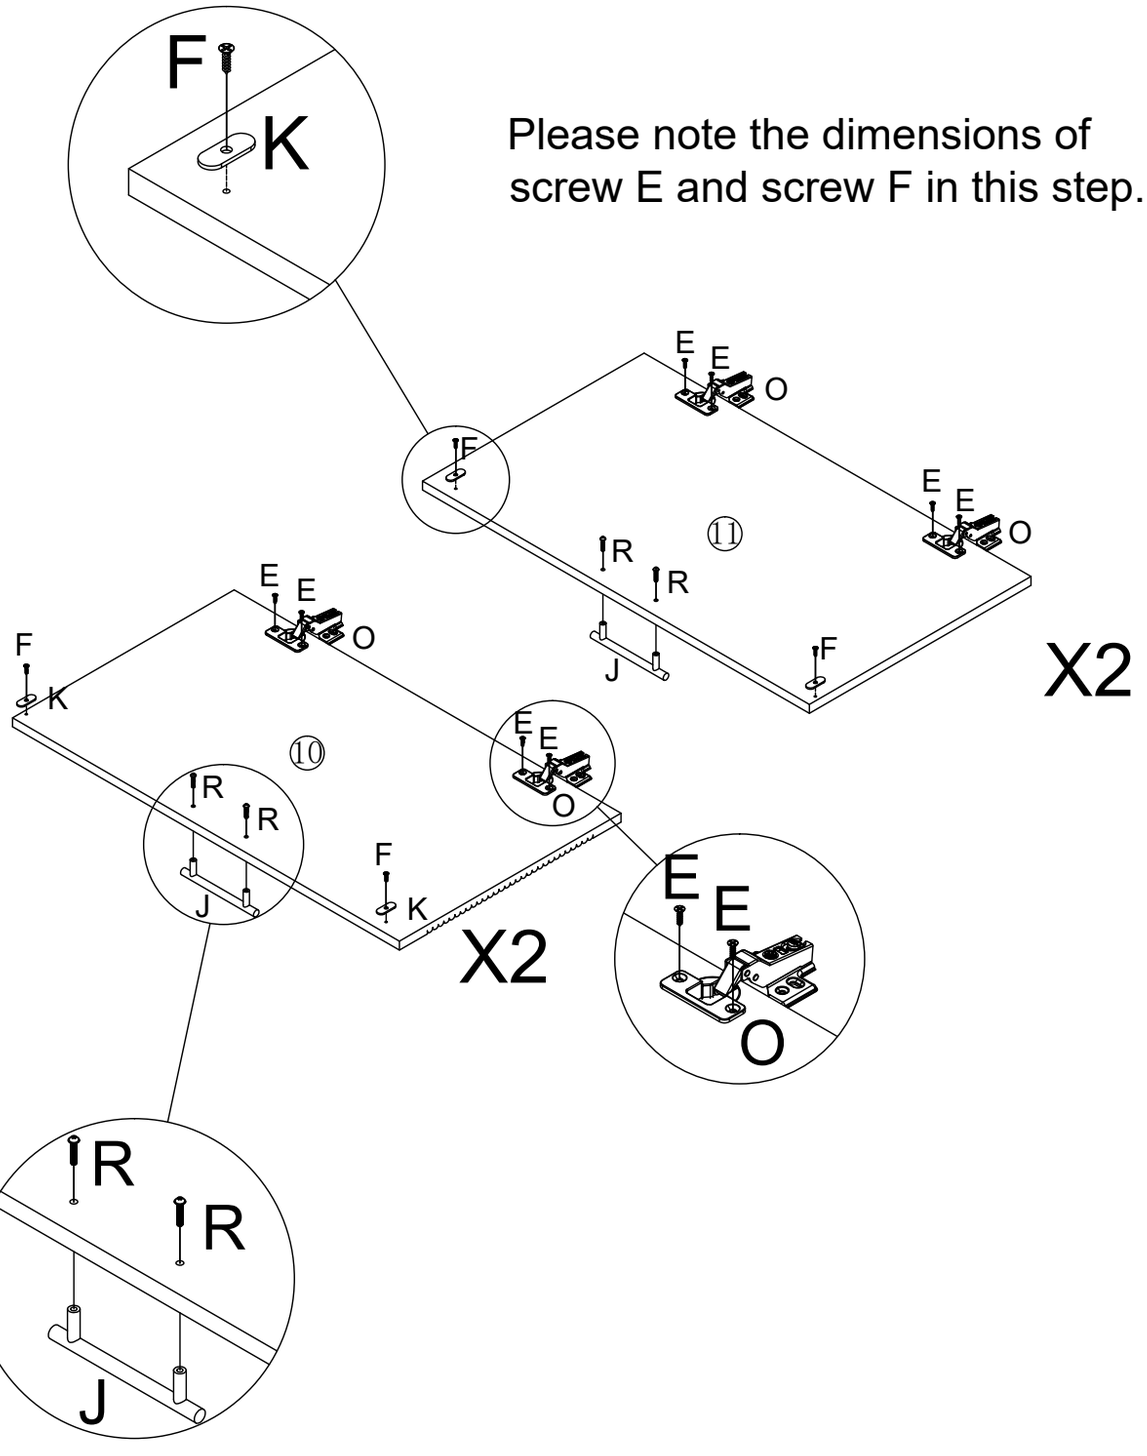


Step 15

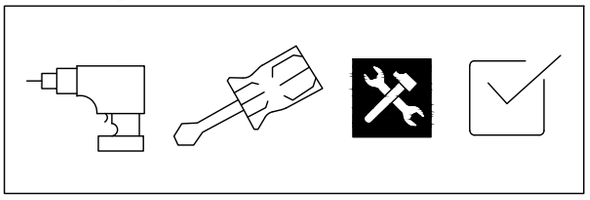


E	×16




How do I get the two doors to align flat by adjusting the hinges?




1. Adjust the screws shown inFiqure 1 to adjust the door sup and down.



2. Adjust the screws shown inFig. 2 and pull the door backand forth so that it can be opened smoothly.




3. Adiust the screws shown in Fiqure 3 to adjust the door left and right to the right position.




4. After the adjustment is complete, install the remaining two screws tosecure the door in place.


Step 16

E	×16

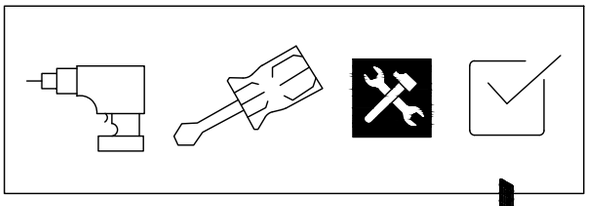


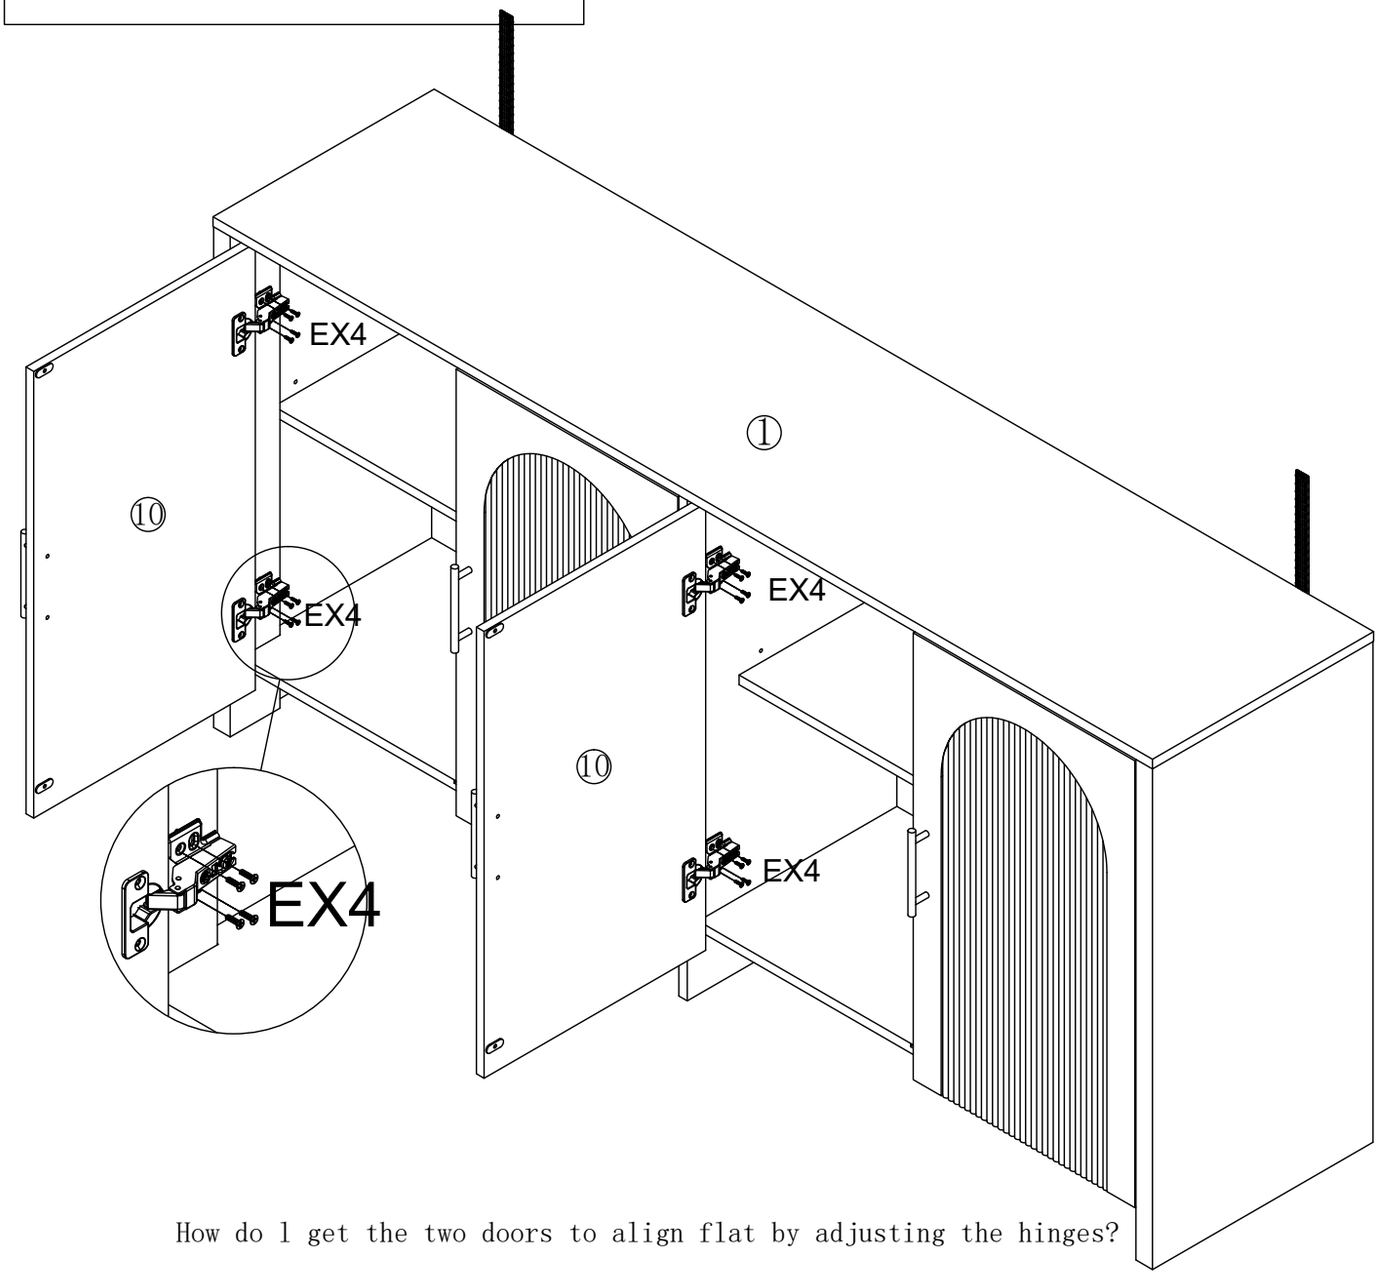


How do I get the two doors to align flat by adjusting the hinges?




1. Adjust the screws shown inFiqure 1 to adjust the door sup and down.



2. Adjust the screws shown inFig. 2 and pull the door backand forth so that it can be opened smoothly.



3. Adiust the screws shown in Fiqure 3 to adjust the door left and right to the right position.



4. After the adjustment is complete, install the remaining two screws tosecure the door in place.

Step 17

G	×2	M	×2
